

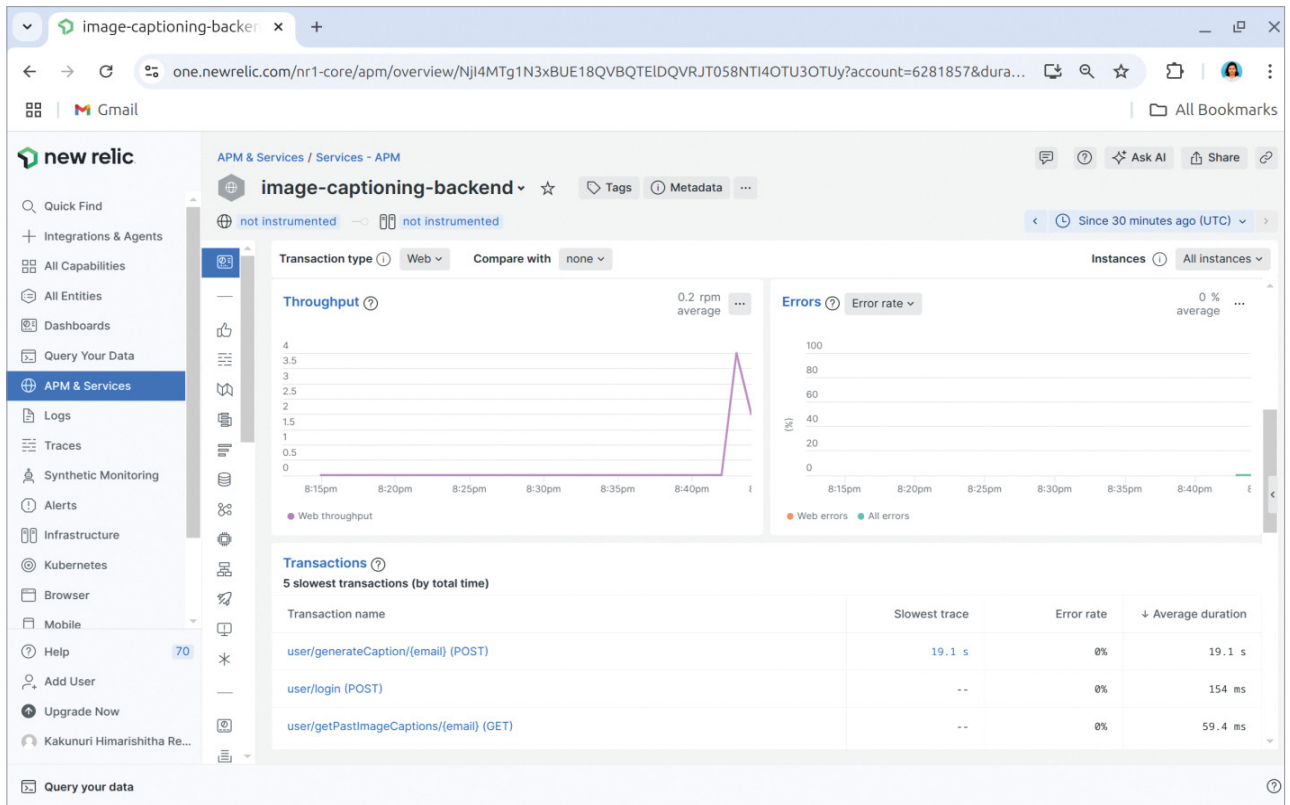


Figure 2: Dashboard displaying throughput, error rate, and slowest transactions

Step 1: Creating a New Relic Python agent

Navigate to the *Integrations & Agents* section in New Relic.

- Select *Python* as the programming language.
- Choose the environment where the application is running (Docker in this case) and click *Continue*.

Step 2: Selecting the application type

- Choose whether the Python model is a web application or a non-web application based on its functionality.

Step 3: Installing the New Relic Python agent

- Ensure all required dependencies are listed in *requirements.txt*.
- Install the New Relic Python agent using the command:

```
pip install newrelic
```

Step 4: Configuring New Relic for Python

- Create a New Relic configuration file by executing the command:

```
newrelic-admin generate-config your_licence_key newrelic.ini
```

- Customise the *newrelic.ini* file as required for the monitoring setup.

Step 5: Specifying the framework

- Select the framework used for hosting the model (Django in this case).

Step 6: Integrating New Relic with Docker

- Modify the Dockerfile to:
- Copy the New Relic configuration file into the container:

```
COPY newrelic.ini /newrelic.ini
```

- Copy and install the dependencies:

```
COPY requirements.txt .
RUN pip install --no-cache-dir -r ./requirements.txt
```

- Use the New Relic admin tool to wrap the Django *runserver* command:

```
ENTRYPOINT ["newrelic-admin", "run-program"]
```

Step 7: Verifying the integration in the dashboard

- Select the Python server from the New Relic dashboard.
- Build and run the Docker container.
- Navigate to the New Relic dashboard to confirm the successful connection and review real-time metrics, as shown in Figure 3.