


R Series: 'stringr' Package

We have been exploring various R packages for handling text for natural language processing. In this twenty-third article in the R, Statistics and Machine Learning series, we delve into the 'stringr' package, which provides a comprehensive set of functions to easily work with strings.

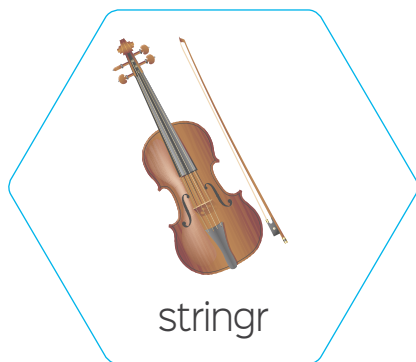

stringr

str_extract str_dup str_like str_like str_extract str_to_ str_count str_equal str_replace str_remove str_flatten str_detect str_sort str_sort str_count

We will use R version 4.1.2 installed on Parabola GNU/Linux-libre (x86-64) for the code snippets.

```
$ R --version
R version 4.1.2 (2021-11-01) -- "Bird Hippie"
Copyright (C) 2021 The R Foundation for Statistical Computing
Platform: x86_64-pc-linux-gnu (64-bit)
```

R is free software and comes with ABSOLUTELY NO WARRANTY.
You are welcome to redistribute it under certain conditions.
Type 'license()' or 'licence()' for distribution details.

You can install and load the 'stringr' package using the following commands:

```
> install.packages("stringr")
```

Installing package into '/usr/local/lib/R/site-library'
(as 'lib' is unspecified)

```
...
** installing vignettes
** testing if installed package can be loaded from temporary
location
** testing if installed package can be loaded from final
location
** testing if installed package keeps a record of temporary
```

```
installation path
* DONE (stringr)
```

```
> library(stringr)
```

str_to_

The `str_to_()` functions provide methods to transform strings to upper case and lower case, format titles, and convert text into a sentence format. The syntax for this function is as follows:

```
str_to_<function>(string, locale = "en")
```

A few examples are given below:

```
> t <- "R, Statistics and Machine Learning"

> str_to_upper(t)
[1] "R, STATISTICS AND MACHINE LEARNING"

> str_to_lower(t)
[1] "r, statistics and machine learning"

> str_to_title(t)
[1] "R, Statistics And Machine Learning"
```