

same folder with the content shown in Figure 2. The name we mention in metadata will be the name of the resulting AWX deployment. The port number to run AWX can be mentioned in the file, or the system will assign the default port number.

14. This `awx-demo.yaml` file is to be added in the list of resources in the `kustomization.yaml` file, as shown in Figure 3.
15. Finally, we have to run Kustomize again to create the AWX instance in our cluster by executing the following command:

```
kustomize build . | kubectl apply -f -
```

16. After a few minutes, the new AWX instance will be deployed in a cluster and we can also monitor its installation logs using the command:

```
kubectl logs -f deployments/awx-operator-controller-manager -c awx-manager
```

17. After a few seconds, we should be able to see that the operator has begun to create new resources by using the command given below:

```
kubectl get pods -l "app.kubernetes.io/managed-by=awx-operator"
kubectl get svc -l "app.kubernetes.io/managed-by=awx-operator"
```

18. When AWX is deployed in a cluster, we can access the

AWX instance by running the command given below:

```
minikube service -n awx awx-demo-service --url
```

19. The user name is `admin` by default and we can get the password using the following command:

```
kubectl get secret awx-demo-admin-password -o jsonpath="{.data.password}" | base64 --decode ; echo
```

This completes the basic installation. Go to the URL and log in using `admin` as user name and password.

Running Ansible Playbook using AWX

- We can get the URL of the Ansible AWX dashboard by using the following command:

```
minikube service -n awx awx-demo-service --url
```

- The Ansible AWX web portal is now accessible on `http://hostip_or_hostname:30080` (by default, the port number is 30080 if we have not set the port number of AWX in the `awx-demo.yaml` file).
- Launch your browser to access the dashboard and you will get a screen as shown in Figure 4.
- Use `admin` as user name and get the password by running the following command:

```
kubectl get secret awx-demo-admin-password -o jsonpath="{.data.password}" | base64 --decode ; echo
Sample password:
LkywUKDwKdnhiEcvFe0zRQ9j0JCz7eM
```

- Log in using the user name and password, and enter into the AWX Administration Dashboard, which is shown in Figure 5. Now we can start adding inventory, credentials, hosts, projects, templates and Ansible roles, and automate our infrastructure and application deployment.

Next, select the organisation tab on the left side of the screen, click on the `Add` button to add a new organisation, add the name of the organisation and click on `Save` (Figure 6).

Inventory setup

- Now go to `Inventory` and click on the `Add` button to create inventory.

```
...
resources:
- github.com/ansible/awx-operator/config/default?ref=<tag>
# Add this extra line:
- awx-demo.yaml
...
```

Figure 3: `kustomization.yaml` file content

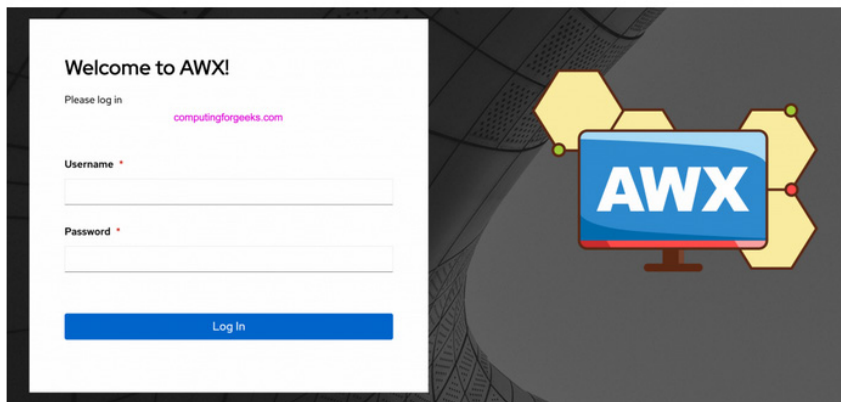


Figure 4: AWX login page