

Select *sudo* in *Privilege Escalation* and *root* in *Privilege Escalation* user name to give root permission to execute. Then save this, as shown in Figure 9.

Creation of projects

- Now select the *Project* tab and click the *Add* button. Basically, the project is the collection of playbooks you want to execute in your host machine using AWX.
- Give your project a name and select your organisation. Here, we are fetching playbooks from GitHub; so, select *git* in source control type and enter the URL of the GitHub playbook repository where all the playbooks are present.
- It is recommended to use GitHub to fetch playbooks instead of fetching from the machine, as there will be problems with maintaining version control in

the local machine.

- Enable update revision on launch so that whenever we launch our project, i.e., run our template, it will always fetch the latest version of playbook. So even in case there are changes in playbook in GitHub, only the updated version will always be fetched.
- Then save this, as shown in Figure 10.
- Select the GitHub account from where we are fetching playbooks in AWX, which is shown in Figure 11. This URL has to be used in the source control URL in the project shown in Figure 10.

Creation of templates

- Now select the *Template* tab, click on *Add* button, enter template name and select the project, inventory and

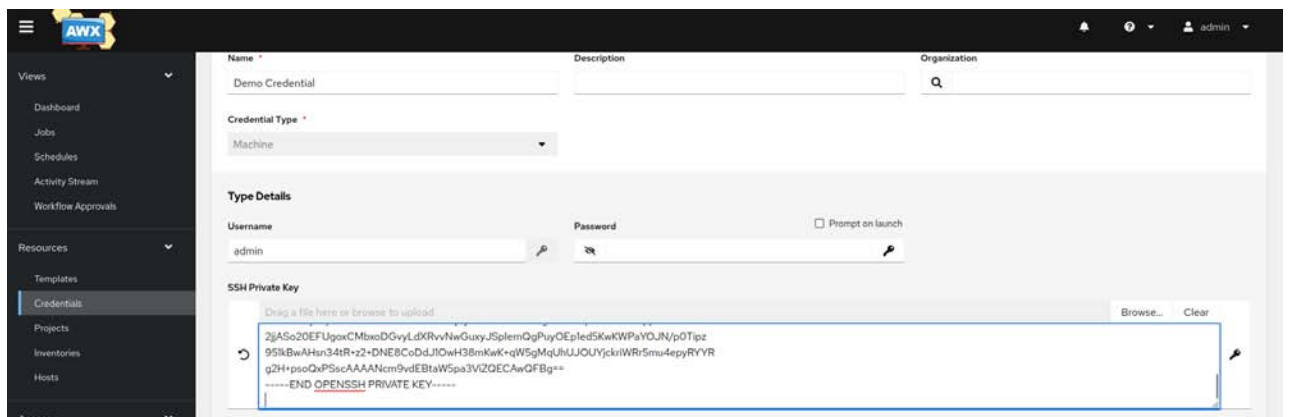


Figure 9: Screenshot to add credentials

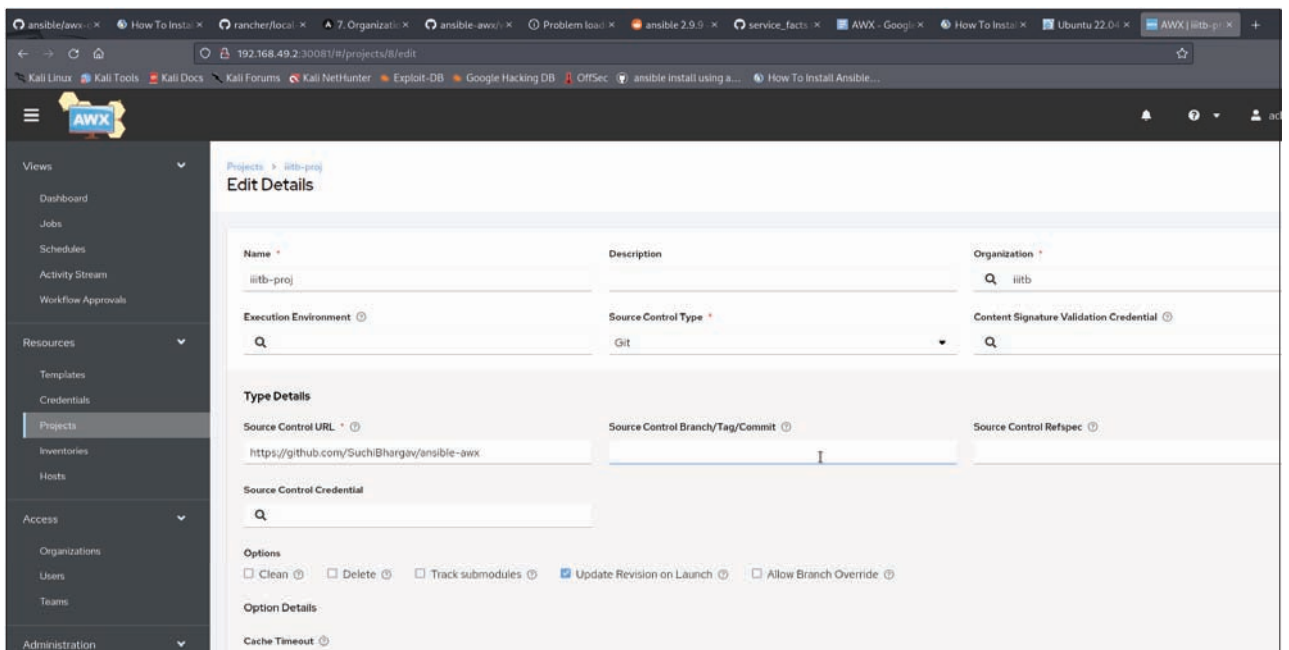


Figure 10: Screenshot to add project