

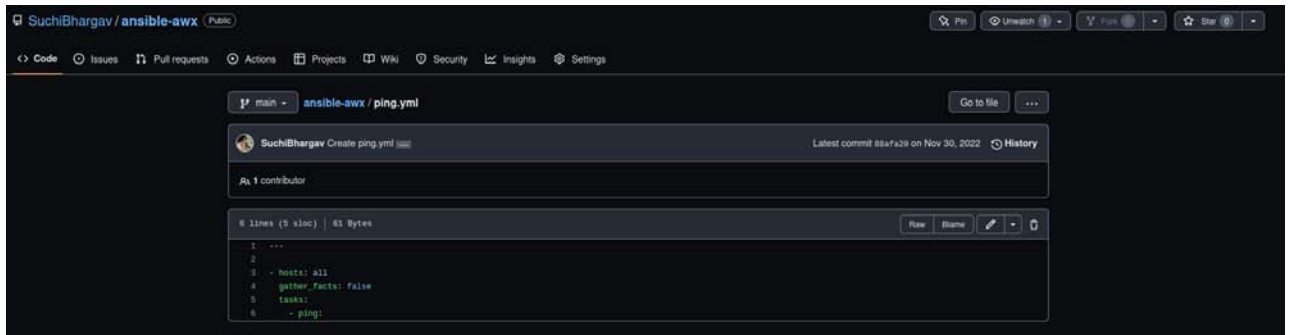


Figure 13: Screenshot of Playbook 1

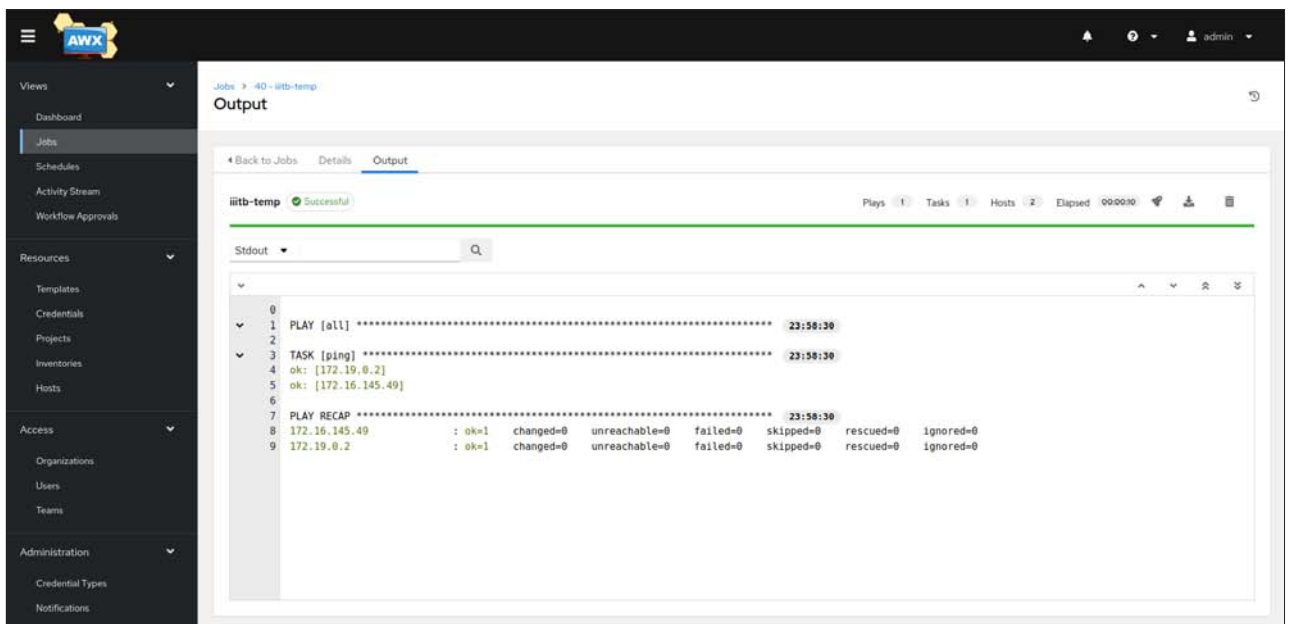


Figure 14: Output of Playbook 1

- After execution of these commands, minikube and container can communicate with each other through the network.
- Then, we have to start ssh service (*service ssh start*) in both localhost and container so that minikube can communicate with both using ssh.
- We can also cross-check if ssh is working or not by going inside the minikube AWX container using the following command:

```
docker exec -it container_id /bin/bash
```

- Now connect to the hosts through ssh by executing the command *ssh root@ip* or *ssh user@ip*. Here *ip* is the IP address of the host with which AWX wants to communicate to check if it is able to ssh into that host or not. *user* is the user name of the host you want to communicate with.

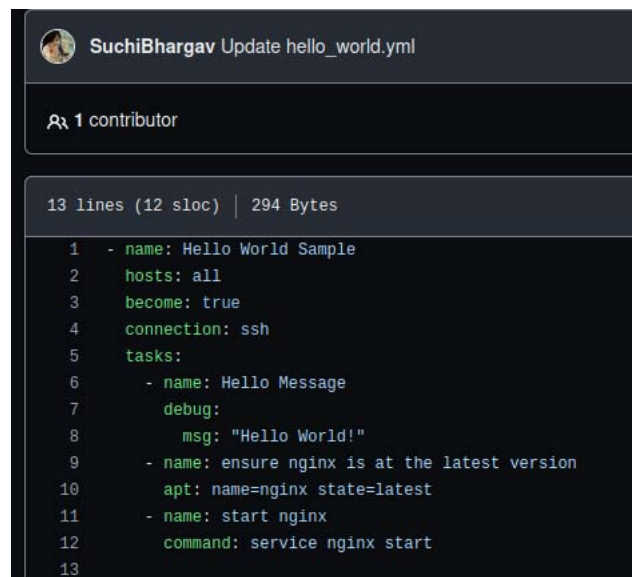


Figure 15: Screenshot of Playbook 2