

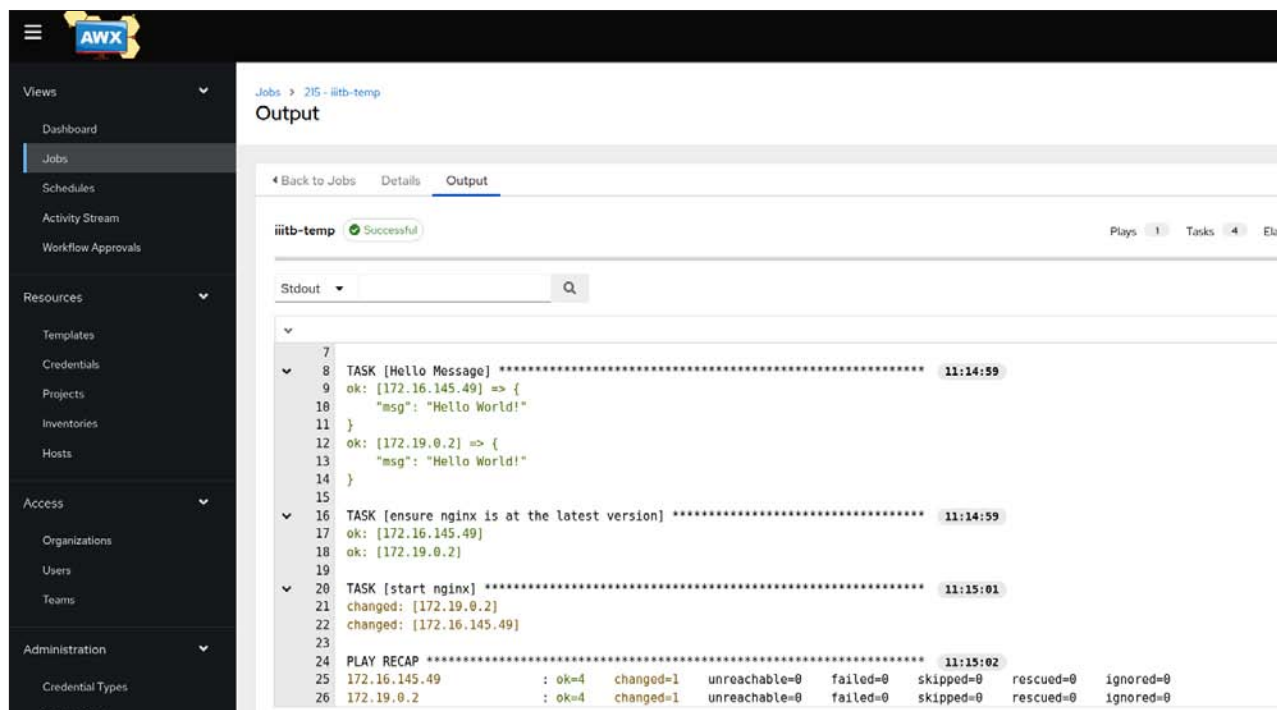


Figure 16: Screenshot after Playbook 2 execution

- In case you are accessing the root user of the host/target machine using ssh by AWX, you have to configure the `/etc/ssh/sshd_config` file in the host and modify the parameters as shown below.

```

permitrootlogin yes
PubkeyAuthentication yes
PasswordAuthentication yes

```

Now restart ssh service using the command:

```
service ssh restart
```

You may get some errors during execution. Some of these are listed below.

- While doing ssh, if you get the error *permission denied* even after entering the correct password or get the error *Host key verification failed*, use the command `ssh-keygen -R ip`. Here, *ip* is the IP address of the client you want to ssh and execute the command `ssh root@ip`.
- When executing playbook, if you are getting the error *The module fails to execute correctly, you probably need to set the interpreter.* See `stdout/stderr` for the exact error, then you have to check whether Python is installed and the command is available in `/usr/bin`. We have completed AWX installation, configured

all the parameters, and enabled the network connection between hosts and targets. Now let us execute some example playbooks to configure infrastructure in the target systems.

Executing playbooks

Playbook 1: Ping.yml

This playbook will ping all the hosts that are attached with inventory. Figure 13 shows the screenshot of the playbook.

After the template is launched to execute it, the output is shown in Figure 14.

Playbook 2: hello_world.yml

This playbook (Figure 15) will print 'hello world' and then install NGINX server inside localhost and container. The execution of this playbook can be seen in Figure 16.

By using the command `service --status-all`, we can verify whether NGINX has started or not after execution of the above playbook.

We have seen only two playbook examples in this article but you can execute any playbook in this user-friendly graphical user interface called Ansible AWX. 

 By: Suchi and Dr B. Thangaraju

The authors are associated with the Open Source Technology Lab at the International Institute of Information Technology, Bengaluru.