

```
#!/bin/bash
dates=`date +%s`
ffmpeg -f video4linux2 -s vga -i /
dev/video0 -vframes 3 /Pictures$/vid-
$dates.%01d.jpg
exit 0
```

If your video source is different, you can replace `/dev/video0` with the path of your camera. I have stored the clicked photos in the `/Pictures` folder; if you want to store your pictures in some other location, do change the path for that as well.

Now run the following command to make the written script executable:

```
chmod +x /usr/local/bin/
passwordpicture
```

This is basically the script to click the photograph. Now, let's write the condition to take the photo only if the password entered into the system is wrong.

Open the following file, using this command:

```
sudo gedit /etc/pam.d/common-auth
```

Change the following line:

```
auth [success=1 default=ignore]
pam_unix.so nullok_secure
```

...to:

```
auth [success=2 default=ignore]
pam_unix.so nullok_secure
```

In order to not take cognisance when the password is correct, add the following just below this line:

```
auth [default=ignore]
pam_exec.so setuid /usr/local/bin/
passwordpicture
```

This will click a picture if a wrong password is entered while logging into the system.

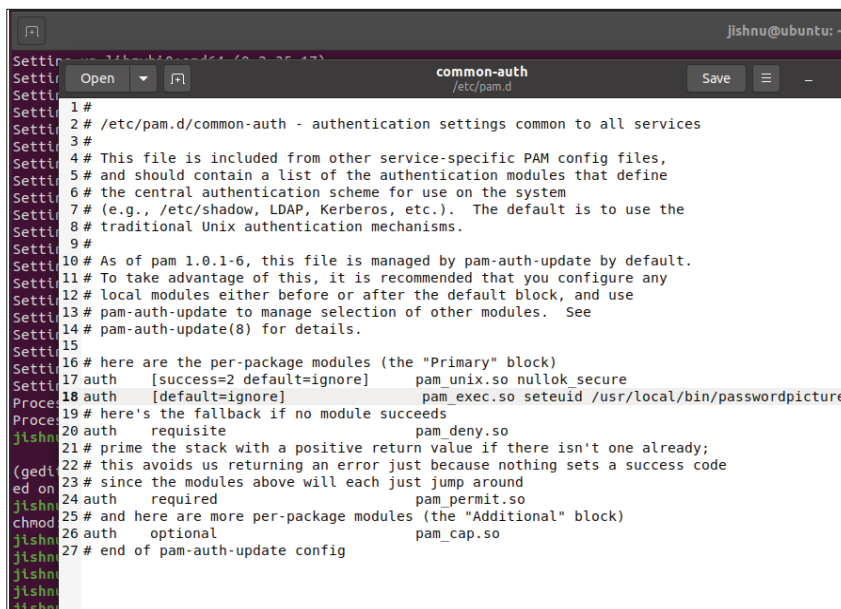


Figure 2: Full script of login

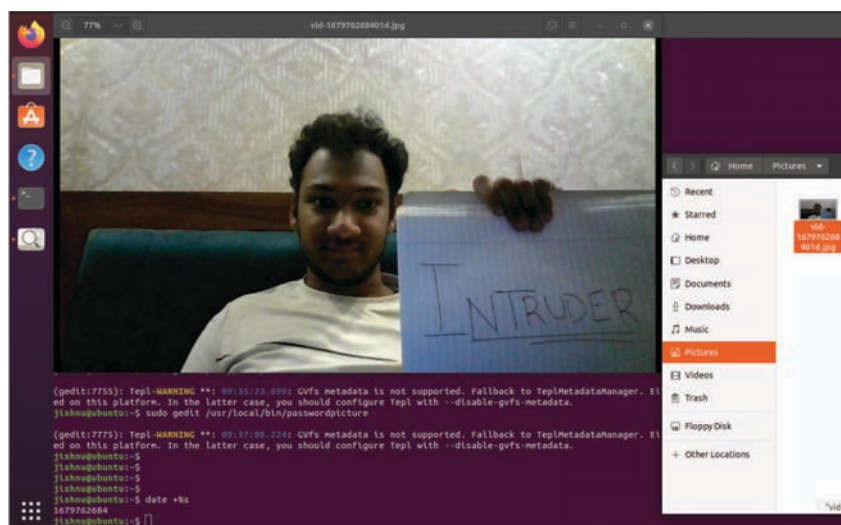


Figure 3: Picture stored in folder

Finally, the overall script should look as shown in Figure 2.

Now save and close it.

If you now log out and try to log in with a wrong password, a picture will be clicked, and it will be stored in the `/Pictures` folder, as shown in Figure 3.

I hope you found this interesting and are going to try it out. And if you explore the tool some more, you will get many more such ideas!! This concept could be implemented while building a larger security system for offline computers. **END** 🐧

By: Jishnu Saurav Mittapalli

The author is a full stack Web developer, interested in modern technologies like artificial intelligence and machine learning. He is currently working in the field of natural language processing.