

Figure 6: Couchbase dashboard

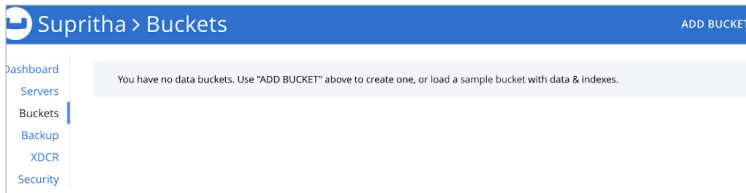
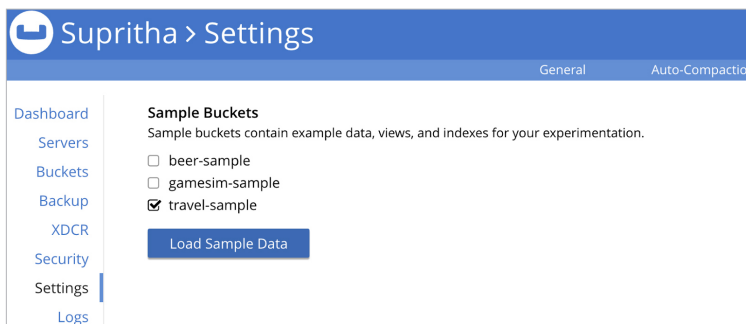
Figure 7: Navigate to *Bucket* tab in the left pane

Figure 8: Import sample bucket — travel-sample

Once all the nodes are a part of the cluster, you can initialise the rebalance. Rebalance redistributes data, indexes, event processing, and query processing among available nodes. When one or more nodes have been brought into a cluster (either by adding or joining) or have been taken out of a cluster (either through removal or failover), rebalance ensures even data distribution. It redistributes data, indexes, event processing, and query processing among available nodes. The cluster map is correspondingly updated and distributed to clients. The process occurs while the cluster continues to service requests for data.

This was an overview of Couchbase with a quick installation using Docker. Make sure to refer to the official documentation for more details and further exploration. **END** 🐧

By: Supritha R.S.

The author is a software engineer and tech enthusiast, driven by a fascination for cloud technology and distributed database systems.

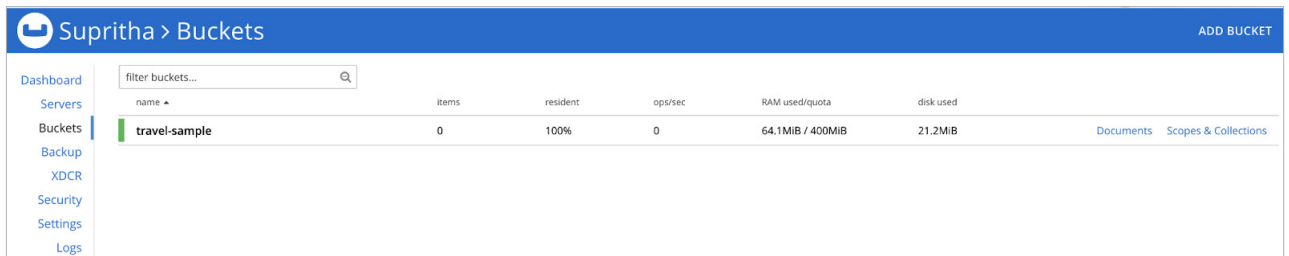


Figure 9: Travel-sample bucket loaded successfully

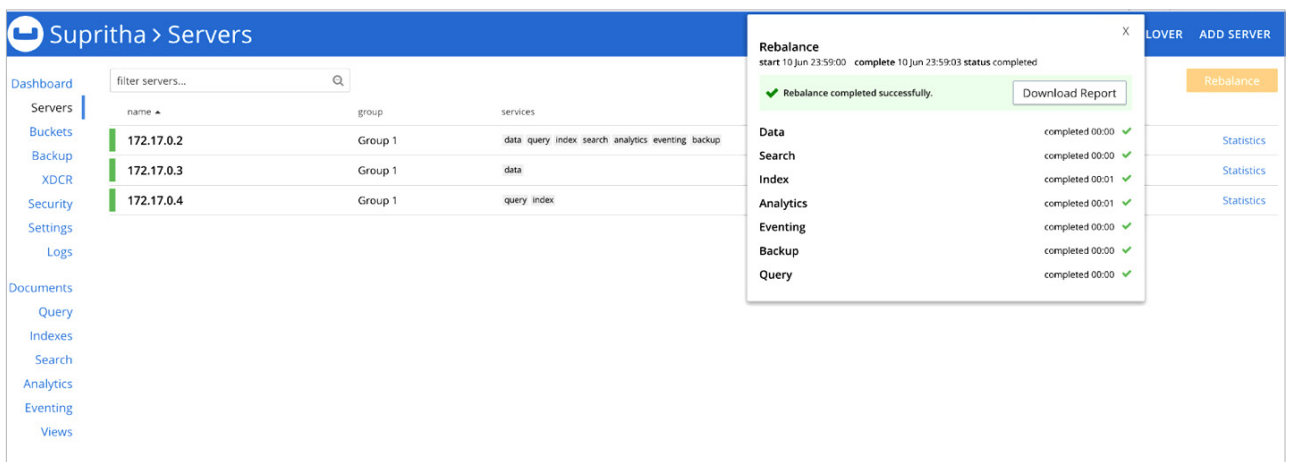


Figure 10: Rebalance