

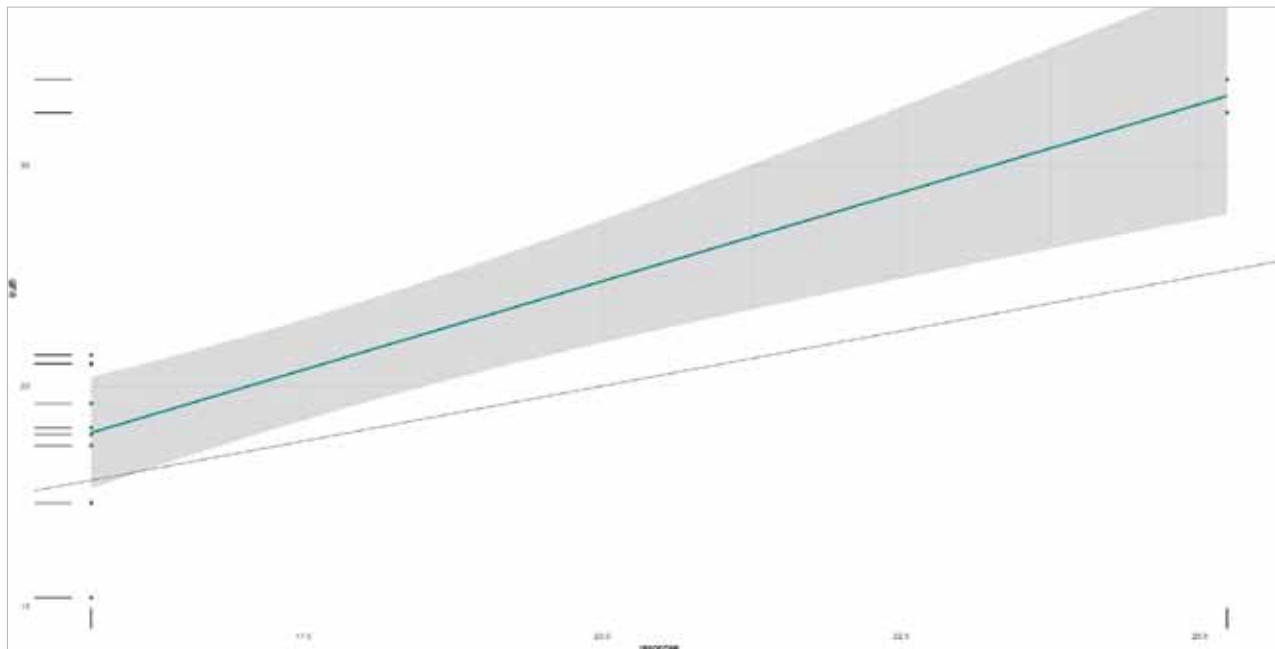


Figure 1: Autoplot

The *predict* method

The *predict()* method can be used for prediction from the training model for the test data as shown below:

```
> predict = learning$predict(task_mtcars, row_ids =
subset$test)
```

```
> predict
<PredictionRegr> for 11 observations:
  row_ids truth response
    1  21.0  15.72500
    2  21.0  15.72500
    4  21.4  15.72500
---
   17  14.7  15.72500
   18  32.4  25.22222
   20  33.9  25.22222
```

The *autoplot* method

The *autoplot()* method can be used to visualise the prediction object. However, you need to first install the *mlr3verse* package as shown here:

```
> install.packages("mlr3verse")
Installing package into '/home/shakthi/R/x86_64-pc-linux-gnu-
library/4.1'
...
** building package indices
** testing if installed package can be loaded from temporary
```

```
location
** testing if installed package can be loaded from final
location
** testing if installed package keeps a record of temporary
installation path
* DONE (mlr3verse)
```

You can then load the '*mlr3viz*' library, and run the *autoplot* function on the prediction result. Figure 1 shows the predicted and truth values for the mtcars data set.

```
> library(mlr3viz)

> predict = learning$predict(task_mtcars, row_ids =
subset$test)

> autoplot(predict)
```

You are encouraged to read the *mlr3* package reference manual to learn more about functions, arguments and usage. **END** 🐧

References

- *mlr3*: Machine Learning in R; <https://mlr-org.com/>
- *mlr3* reference; <https://mlr3.mlr-org.com/reference/>

By: Shakthi Kannan

The author is a free software enthusiast.