

Now create the instance 'GF-Instance01' for the first node 'GF-Node01':

```
asadmin> create-instance --host GF-Node01 --port
4848 --nodeagent GF-Agent01 --cluster GF-Cluster
GF-Instance01
```

```
Please enter the admin user name>admin
Please enter the admin password>adminadmin
Command create-instance executed successfully.
asadmin>
```

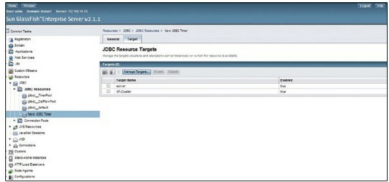


Figure 3: JDBC resource NewJDBCTimer

Start the node agent and instances for the first node 'GF-Node01':

```
asadmin> start-node-agent --syncinstances=true GF-Agent01
```

```
Please enter the admin user name>admin
Please enter the admin password>adminadmin
Please enter the master password [Enter to accept the default]:>
Redirecting output to /appinstall/glassfish/nodeagents/GF-
Agent01/agent/logs/server.log
Redirecting application output to /appinstall/glassfish/
nodeagents/GF-Agent01/agent/logs/server.log
Redirecting output to /appinstall/glassfish/nodeagents/GF-
Agent01/GF-Instance01/logs/server.log
Command start-node-agent executed successfully.
```

```
asadmin>
```

Making changes in JDBC resources

Now log in to the Glassfish administrative console <http://GF-Node01:4848> or <http://192.168.10.10:4848>

The hostname works if DNS is configured in your environment or the host file is configured on both the server and the client.

Browse to *Resources -> JDBC -> JDBC Resources -> jdbc/_TimerPool*

On the right hand side, click on the 'Manage Target' tab.

Add 'GF-Cluster' (the cluster created above) from 'Available Targets' to 'Selected Targets'. On clicking 'OK', we encounter the error that is indicated in Figure 1.

In order to resolve the issue, create a new JDBC resource with the following details:

```
JNDI Name      New JDBC timer [this name can be
                anything of your choice]
Pool Name      _TimerPool [select from the drop-
                down menu]
Status         Enabled
```

Add 'GF-Cluster' from 'Available Targets' to 'Selected Targets'.

The JDBC resource 'New JDBC Timer' has been created successfully.

Browse to *Resources -> JDBC -> JDBC Resources -> New JDBC Timer* and click on the 'Target' tab. The 'GFCluster' should

be added and enabled. Refer to Figure 2 and Figure 3.

Next, browse to *Resources -> JDBC -> JDBC Resources -> jdbc/_CallFlowPool*. 'GF-Cluster' should already be added and enabled under the 'Target' tab. Refer to Figure 4.

Now browse to *Resources -> JDBC -> JDBC Resources -> jdbc/_default*.

Under the 'Target' tab, add the cluster 'GF-Cluster' from 'Available Targets' to 'Selected Targets'. As observed, the added cluster 'GF-Cluster' was not enabled [False]; it is now enabled [True]. Refer to Figure 5.

Once all the changes have been made under JDBC resources, we need to restart 'Nodeagent', 'Instance' and 'domain'.

```
#cd /appinstall/glassfish/bin
#./asadmin
```

Stop the node agent and instance on the first node 'GFNode01' as follows:

```
asadmin> stop-node-agent --stopinstances=true GF-Agent01
Command stop-node-agent executed successfully.
asadmin>
```

Stop the domain on the first node 'GF-Node01' as follows:

```
asadmin> stop-domain
Domain domain1 stopped.
asadmin>
```

Start the domain on the first node 'GF-Node01' as follows:

```
asadmin> start-domain
```

Domain supports application server clusters and other standalone instances.

```
asadmin>
```