

```

configure() {
    ./configure --with-screen=ncurses --prefix=/opt/
    mc --datarootdir=/opt/mc/share --localedir=/opt/mc/locale
    --libexecdir=/opt/mc/libexec --sysconfdir=/opt/mc/etc/
}
compile() {
    make
}

install() {
    rm -rf "getself staging"
    mkdir -p "getself staging"/getself prefix"
    make DESTDIR="getself staging" install

    mkdir -p "getself staging"/getself prefix"/
share/applications";
    cat > "getself staging"/getself prefix"/share/
applications/mc.desktop" <<EOF
[Desktop Entry]
Name=Midnight Commander
Exec=lxterminal -e /opt/mc/bin/mc
Icon=/usr/share/icons/gnome/32x32/
devices/gtk-floppy.png
Terminal=true
Type=Application
EOF
}
}

```

Here's a brief comment on the functions and variables used. At the beginning, you need to declare the metapackage name (mc: sjapp {... here comes the body ... }). Then declare a version for this new package (setself version 4.7.1) and the location of the source code—the (statement setself url) <http://www.midnight-commander.org/downloads/35>. After that, define the functions *configure()*, *compile()*, and *install()*, which as the names imply, will be transferred to the *make* program. After editing the .sjs file, you need to run a meta-compiler named *sjappc* (the command is *sjappc mc-4.7.1.sjs*). After a while, the *sjappc* meta-compiler generates a binary package for Midnight Commander, invoking the GCC compiler to compile the application. The binary package is, in fact, a SQUASHFS file, which you can safely install into the system by issuing the following command:

```
# sjdctl install-app mc.sjapp
```

You can now run Midnight Commander directly, through LXTerminal, specifying the full path to the binary, /opt/mc/bin/mc. Or you can click on the icon with the floppy disk, titled Midnight Commander.

A more complicated SJS description file would be for the Opera Web browser. Since this browser is not an open source product, you need to remove the *compile()* and



Figure 6: Open-source browser Chromium runs smoothly in Igelle DSV

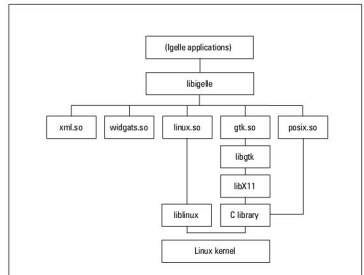


Figure 7: Future Igelle's architecture

configure() functions. On the other hand, the *install()* function has now become longer:

```

opera : sjapp {
    setself "url" "http://snapshot.opera.com/unix/labs-6177/
opera-10.50-6177.linux.i386.tar.gz"
    setself "version" "10.50"

install() {
    rm -rf "getself staging"
    mkdir -p "getself staging"/getself prefix"

    cp -R "getself workdir"/usr/* "getself
staging"/getself prefix"

    mkdir -p "getself staging"/getself prefix"/bin";
    cat "getself workdir"/opera" | \
        sed s@^OPERA_BINARYDIR=/usr/lib/opera@
OPERA_BINARYDIR=/opt/opera/lib/opera@g | \
        sed s@^OPERA_DIR=\$PWD/usr/share/
opera@"@OPERA_DIR=/opt/opera/share/opera@g > \

```