

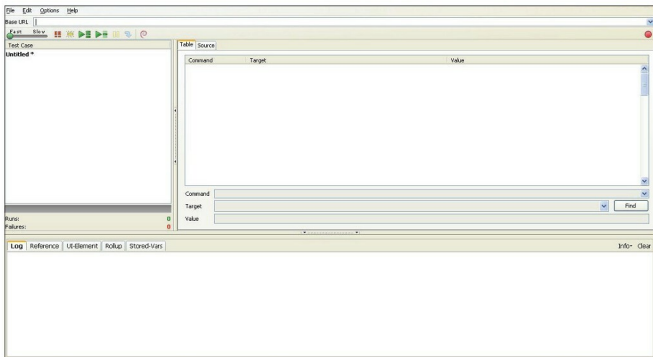


Figure 1: Selenium IDE default screen



Figure 2: Selenium IDE toolbar

response of the action is not verified. For example, let's assume you are performing/recording a user creation action in the Web application. The recording action will generate code to create the user, but it cannot verify if the user has been successfully created. To verify the response, you can right-click on the text which you want to verify, and choose the *VerifyTextPresent* option. In this case, you can right-click on the text which informs you that user creation was successful.

The code can be saved as a test suite or a test case. A test suite is a collection of test cases.

Playback

You can click the *Play the entire suite* button to execute the test suite. You can also click the *Play current test case* button to execute a single test case. The difference in the appearance of these two buttons can be seen in Figure 2.



Note: When the test script is executed, logs are generated for every command. This is useful while investigating any issues with the test script.

Figure 3 shows what the Selenium IDE *Table* view looks like after executing tests.

The Selenium IDE add-on provides a playback option for HTML code, but does not support playback for other programming languages. Test suites written or generated in other programming languages can be executed using the




Figure 3: Table view after running tests

Selenium RC (Remote Control) tool. We will cover this tool in the next article in this series. **END** 

By: Nithya Pattabiraman

The author is currently employed at CollabNet, Chennai, and is working in the Quality Assurance Group. She can be contacted at nithya@collab.net.