



Figure 1: The output from the MRTG index page

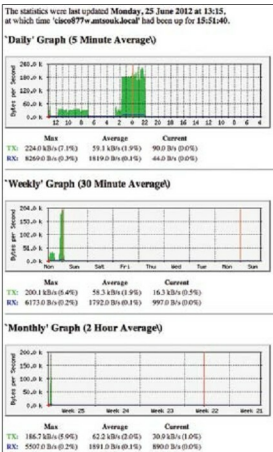


Figure 2: Detailed MRTG output

```
Virtual-Access1: Ifindex = 15
Vlan1: Ifindex = 13
FastEthernet2: Ifindex = 3
FastEthernet3: Ifindex = 4
Dot11Radio0: Ifindex = 5
ATM0-aal5 layer: Ifindex = 10
ATM0.0-aal5 layer: Ifindex = 11
cisco877w#
```

In my case, the required interface index number was 14 (Dialer1).

I made MRTG track those two values using the following line:

```
Target[Cisco-linespeed]: 1.3.6.1.2.1.2.2.1.1
0.1481.3.6.1.2.1.2.2.1.16.14: OpenSourceFY@
cisco:
```

Running MRTG

There are two ways of running MRTG, manually or as a *cron* job. The first way is useful for testing and debugging purposes. After going to the `/Users/mtsouk/Sites/mrtg` folder, I ran the following command:

```
$ mrtg cisco-MRTG.cfg
```

The first time you run it, you will see many error and warning messages due to the fact that all the MRTG output and data files are missing and MRTG has to build them. The next task is to set up MRTG to run as a *cron* job by adding the following *crontab* entry:

```
*/* * * * /opt/local/bin/mrtg /Users/mtsouk/Sites/mrtg/cisco-MRTG.cfg
```

This *cron* command makes MRTG run every five minutes.

MRTG output

Figure 1 shows the output of the MRTG index page as created by the *indexmaker* utility with the initial *cisco-MRTG.cfg* file created by the *cfgmaker* utility.

Figure 2 shows the detailed output that is displayed when you press on one of the images in Figure 1. There is also a 'Yearly Graph' that is not shown. 

Web Links & Bibliography

- [1] [mrtg: http://oss.oetix.ch/mrtg/](http://oss.oetix.ch/mrtg/)
- [2] Cisco MIBs: <http://www.cisco.com/public/sw-center/netmgmt/cmtk/mibs.shtml>
- [3] SNMP RFCs: http://www.snmp.com/protocol/snmp_rfc.shtml

By: Mihalis Tsoukalos

Mihalis Tsoukalos enjoys photography, UNIX administration, programming iOS devices and creating websites. You can reach him at tsoukalos@sch.gr or @mactsouk