

// Text Modification

```
#define BLINK_SLOW    "\x1b[5m"
#define BLINK_RAPID  "\x1b[6m"
```

// Colors

```
#define CC_CLEAR    "\x1b[0m" // Console
Color CLEAR
```

// FG Colours

```
#define BLACK    "\x1b[30m"
#define RED      "\x1b[31m"
#define GREEN    "\x1b[32m"
#define YELLOW   "\x1b[33m"
#define BLUE     "\x1b[34m"
#define MAGENTA  "\x1b[35m"
#define CYAN     "\x1b[36m"
#define WHITE    "\x1b[37m"
```

// FG Intense Colors

```
#define IBLACK    "\x1b[30;1m"
#define IRED      "\x1b[31;1m"
#define IGREEN    "\x1b[32;1m"
#define IYELLOW   "\x1b[33;1m"
#define IBLUE     "\x1b[34;1m"
#define IMAGENTA  "\x1b[35;1m"
#define ICYAN     "\x1b[36;1m"
#define IWHITE    "\x1b[37;1m"
```

// BG Colors

```
#define BGC_BLACK "\x1b[40m"
#define BGC_RED   "\x1b[41m"
#define BGC_GREEN "\x1b[42m"
#define BGC_YELLOW "\x1b[43m"
#define BGC_BLUE  "\x1b[44m"
#define BGC_MAGENTA "\x1b[45m"
#define BGC_CYAN  "\x1b[46m"
#define BGC_WHITE "\x1b[47m"
```

// BG Intense Colors

```
#define BGC_IBLACK "\x1b[40;1m"
#define BGC_IRED   "\x1b[41;1m"
#define BGC_IGREEN "\x1b[42;1m"
#define BGC_IYELLOW "\x1b[43;1m"
#define BGC_IBLUE  "\x1b[44;1m"
#define BGC_IMAGENTA "\x1b[45;1m"
#define BGC_ICYAN  "\x1b[46;1m"
#define BGC_IWHITE "\x1b[47;1m"
```

// General Utility Functions

```
void cagxy(unsigned int x, unsigned int y); // Clear and
```

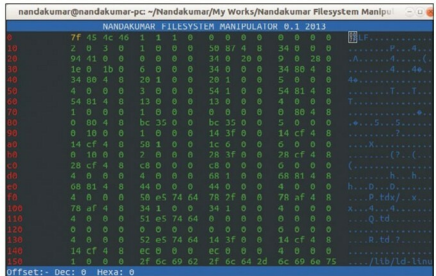


Figure 1: A Hex editor/filesystem manipulator created by the author, which uses the above code for console operations

Goto X,Y

```
void clrscr(); // Clear the Screen
```

```
char getch();
```

```
void gotox(unsigned int x);
```

```
void gotoxy(unsigned int x, unsigned int y);
```

```
void nocursor();
```

```
void reset_video();
```

```
void showcursor();
```

```
void textcolor(char *color);
```

```
void textbackground(char color[11]);
```

```
#endif
```

Example program

The code for the program that illustrates the use of our `conio` is given below:

```
test.c:
```

```
#include <stdio.h>
#include "conio.h"
```

```
int main()
{
```