

replace multiple logins, separate them with commas (,).

options available: gdm, login

Here's an example build configuration:

```
server_url = https://example.com/api
replace_logins = login,gdm
```

To build the module, go to the directory `custom_pam_mod`, and run the following command:

```
make pam_mod_build
```

Note: Proceed to the next step only if the build has succeeded without any error.

To install this module to the host PC and use it for logins we mentioned in the configuration file, use the following command:

```
make install
```

To validate or test this setup, follow these steps:

- Ensure the server is running the `server.js` script.
- Make sure your host PC and the server are able to communicate with each other (ping to access that port of the server from the host PC).
- Ensure you have configured the users in GitHub. Boot the host PC and when asked to log in, try to login with the password set inside the `server.js`.


That's all! The PAM module is now customised for API based authentication. You can try other options as well based on use cases by modifying the PAM module for an Ubuntu (or any Linux-based) PC. I have put out the code in GitHub (see References below) so that you can try it on your own. **END!** 🐧

References

- Intro to PAM, <https://www.redhat.com/sysadmin/pluggable-authentication-modules-pam>
- Git repo of the custom PAM module, <https://github.com/dicortech/UbuntuPAMCustomLogin>

By: Anoop V.H. and Emil M George

The authors are design engineers at Digital Core Technologies, Kochi, Kerala.

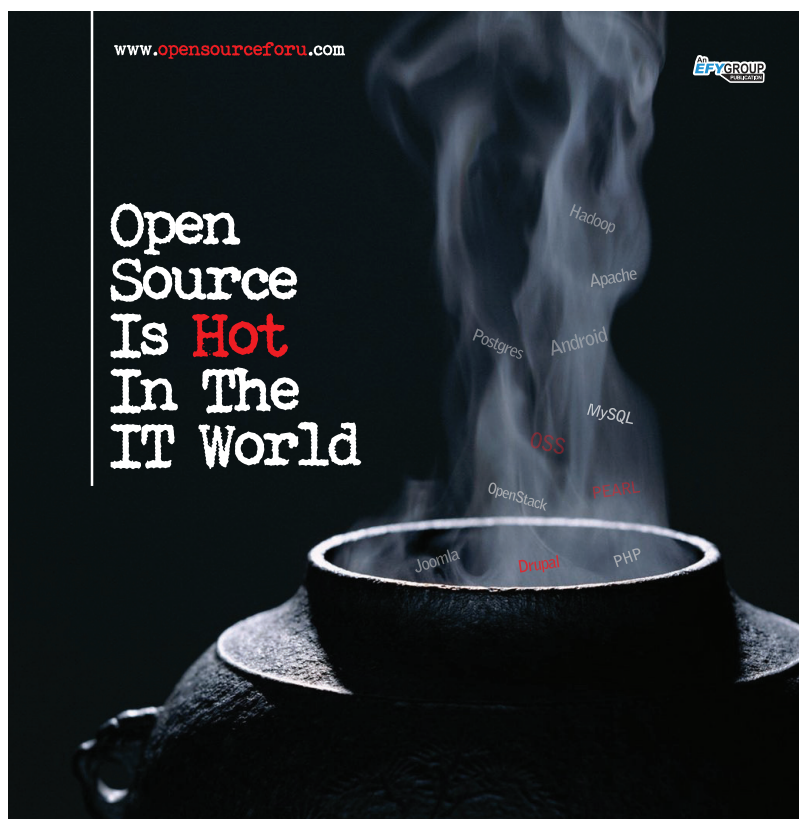

THE COMPLETE MAGAZINE ON OPEN SOURCE



- >> To find dealers to buy copy from news-stand, visit: www.ezine.lfymag.com
- >> To subscribe, visit: pay.efyindia.com
- >> To buy an ezine edition, visit: www.magzter.com choose Open Source For You