




Name	Time	Size
../		
newrelic-agent-8.9.1.jar	07-Feb-2024 17:00	37634583
newrelic-agent-8.9.1.pom	07-Feb-2024 17:00	1125
newrelic-java-8.9.1.zip	07-Feb-2024 17:00	35948318
newrelic-java.zip	07-Feb-2024 17:00	35948318
newrelic.yml	07-Feb-2024 17:00	20417

Figure 2: Image showing the appropriate New Relic One zip file to be downloaded

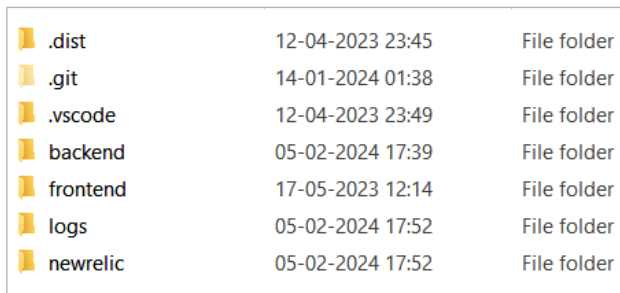

.dist	12-04-2023 23:45	File folder
.git	14-01-2024 01:38	File folder
.vscode	12-04-2023 23:49	File folder
backend	05-02-2024 17:39	File folder
frontend	17-05-2023 12:14	File folder
logs	05-02-2024 17:52	File folder
newrelic	05-02-2024 17:52	File folder

Figure 3: Directory structure

folders available for download. Choose the zip folder named 'newrelic-java.zip' as indicated in the image above.

Extract the downloaded zip folder into your project directory. Your project directory structure should resemble the image in Figure 3.

Open the file named *newrelic.yml* located within the extracted folder. Inside this file, you'll find two variables

named 'license_key' and 'app_name' left blank. Populate the 'license_key' variable with your New Relic licence key and specify the name of your application in the 'app_name' variable. The application name can be customised as per your preference.

To execute New Relic alongside your Spring Boot application, use the following command while running the application:

```
java -javaagent:<path to your new relic jar>/newrelic.jar
-jar <path to your application jar>/<your application jar
name>.jar
```

For the <your application jar name>.jar file, you must first generate it using the command *mvn install*. This command generates a jar file in the target folder.

By following these steps, you'll seamlessly integrate New Relic One into your Spring Boot application, enabling comprehensive monitoring and performance optimisation.

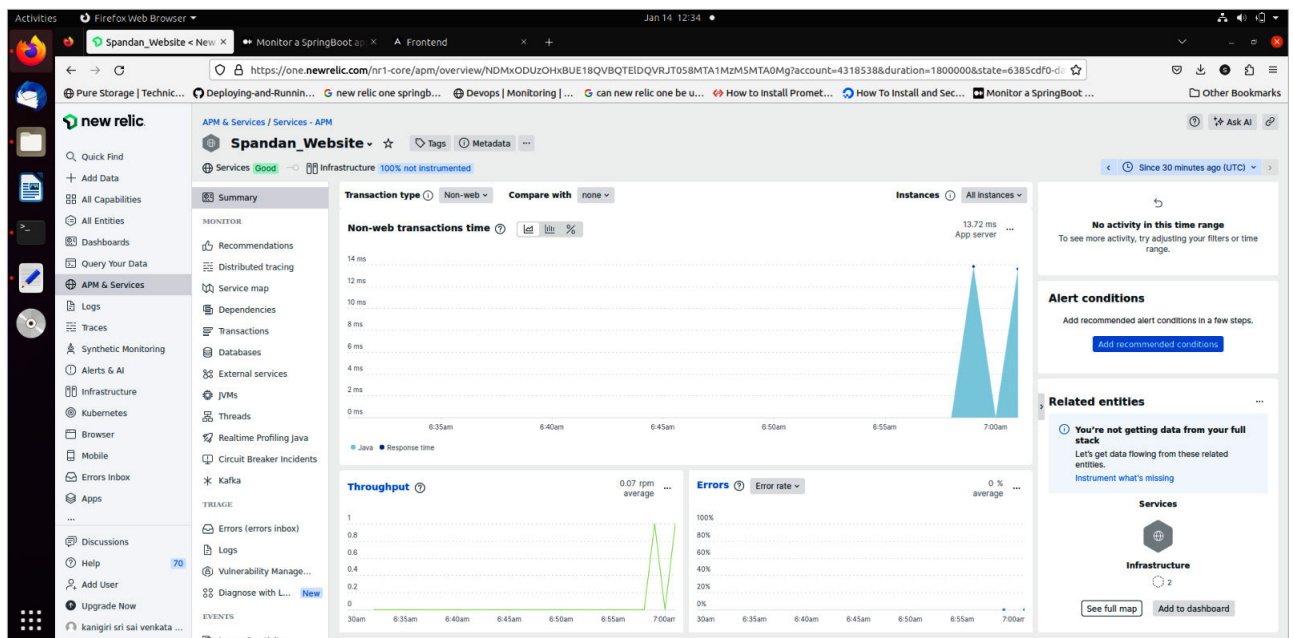


Figure 4: Dashboard for the New Relic One web interface for the application