

- Create the custom resource (CR) for the LokiStack. This involves defining the specifications for your Loki deployment, including configurations for storage, retention, and other parameters.

For internal Loki log storage, the following steps outline the installation process:

- Ensure you have admin permissions and access to the OpenShift console URL.
- In the web console, navigate to *Operators -> Operator Hub*, as depicted in Figure 6.
- Search for the keyword 'loki' to locate the Loki Operator. Proceed with the installation by following the prompts and

providing necessary configurations as per your requirements.

When selecting a version for deployment, opt for the 'stable' option or any stable version 5.x among the available choices.

Ensure that the operator deployment is targeted towards the openshift-operators-redhat namespace, which is typically the default selection.

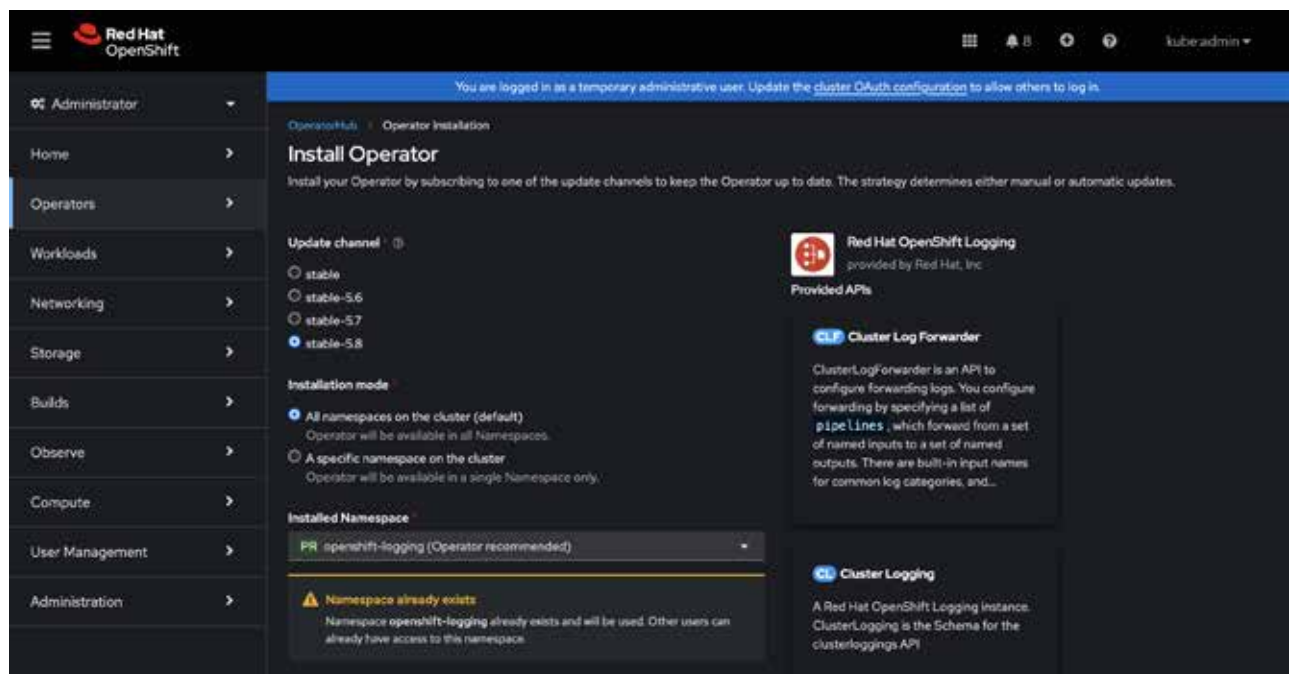


Figure 4: Preview of the operator with channels as well

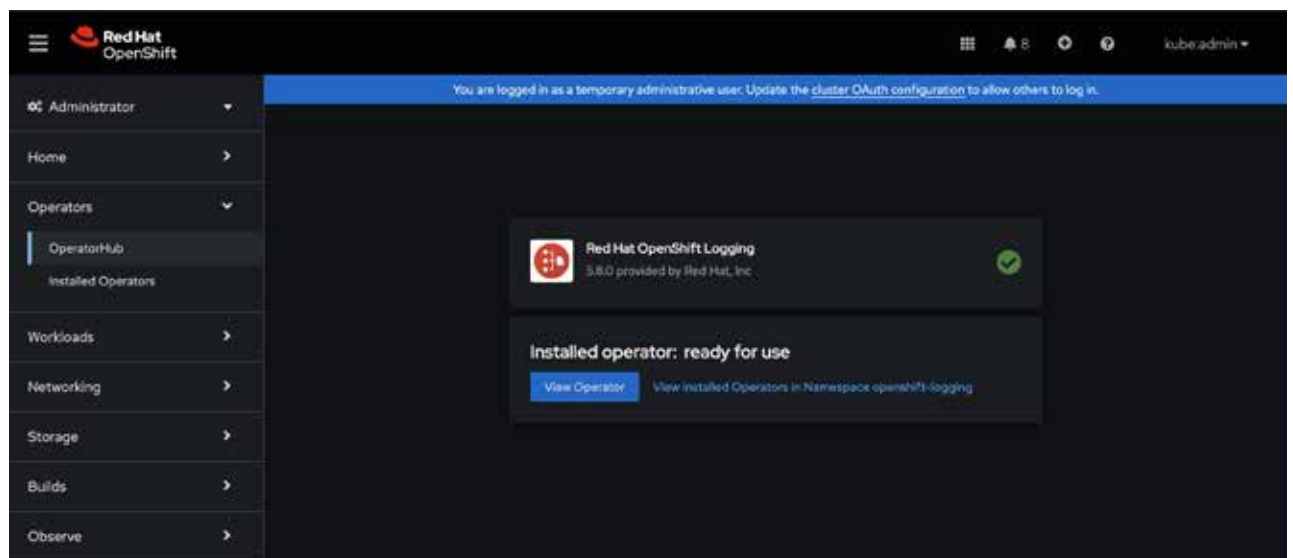


Figure 5: Logging operator installed