

To streamline operations, it is advisable to choose the 'Automatic' approval strategy.

Once the operator is successfully installed, it should appear in the

'Installed Operators' section, as shown in Figure 8.

Now, it's time to define the object storage for Loki, which can be AWS, Minio, GCP, or similar. To configure

Loki's object storage, you'll need to create a secret. This can be done via the OpenShift Container Platform web console or by directly applying the YAML configuration.

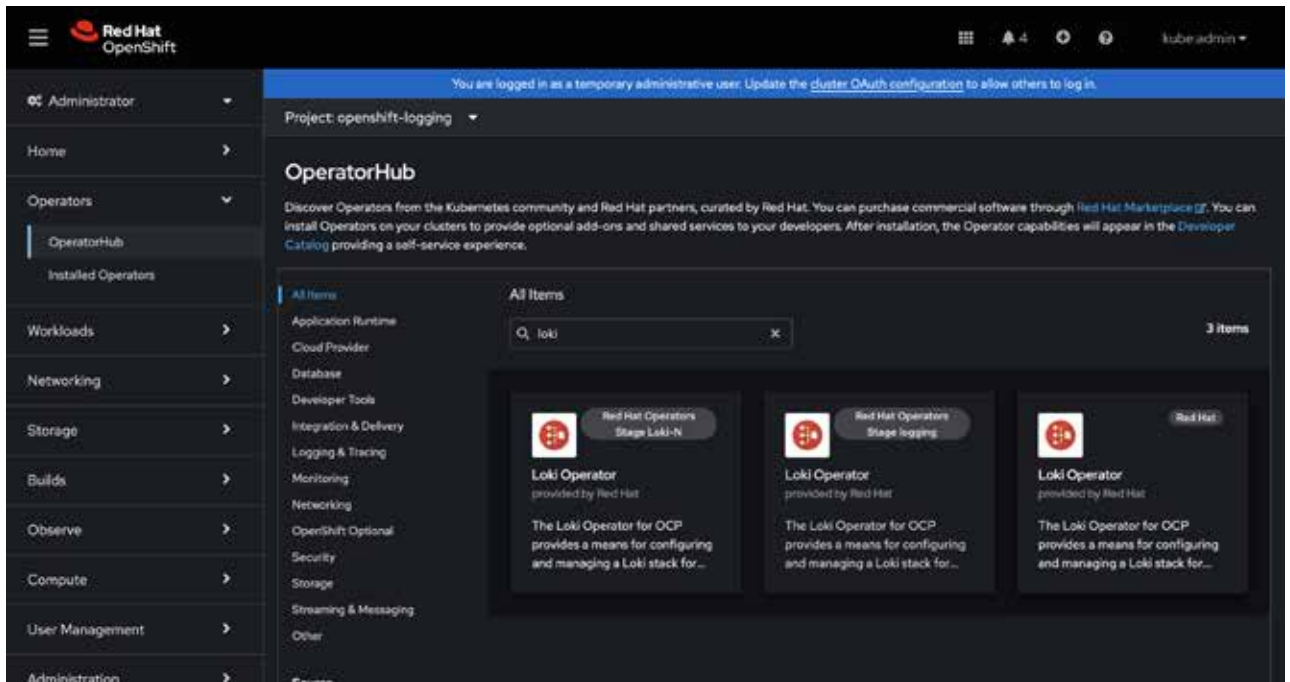


Figure 6: Loki Operators from the Operator Hub

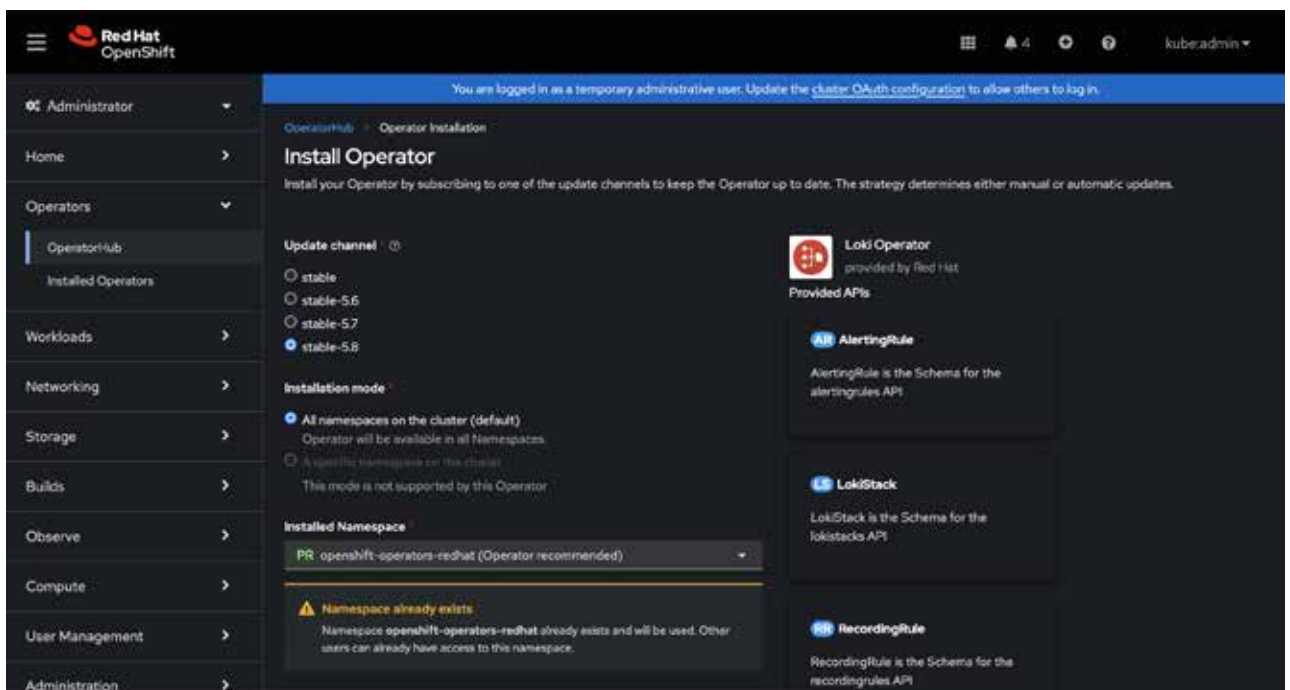


Figure 7: Installation of the operator in the appropriate namespace