

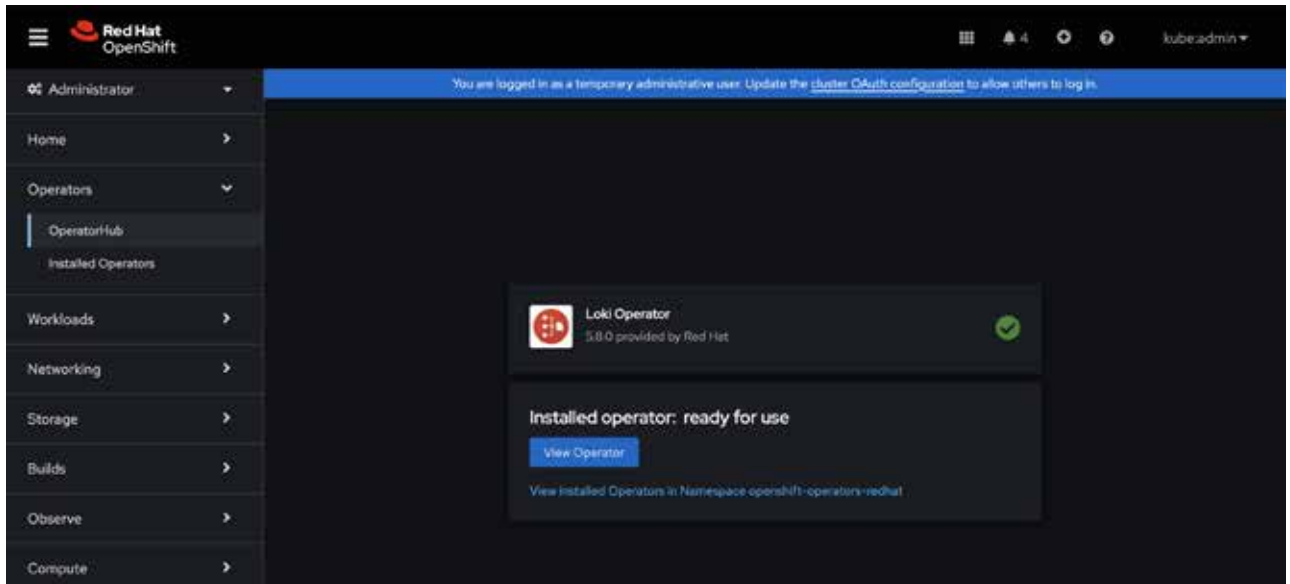


Figure 8: Loki Operator installed

```
cat loki-secret.yaml

apiVersion: v1
kind: Secret
metadata:
  name: cred-secret
  namespace: openshift-logging
stringData:
  access_key_id: QUTJQVkvzVU1GWkk1T1BOSzczTzI=
  access_key_secret: wJalrXUtnFEMI/K7MDENG/bPxRfiCYEXAMPLEKEY
  bucketnames: aosqe-loki-bucket
  endpoint: http://172.23.231.44:9000
  region: us-east-1
```

Figure 9: View of the loki-secret YAML file

```
cat loki-instance.yaml

apiVersion: loki.grafana.com/v1
kind: LokiStack
metadata:
  name: logging-loki -1
  namespace: openshift-logging
spec:
  size: 1x.small -2
  storage:
    schemas:
      - version: v12
        effectiveDate: '2022-06-01'
    secret:
      name: cred-secret -3
      type: s3
  storageClassName: local-sc-loki -4
  tenants:
    mode: openshift-logging
```

Figure 10: Applying the Loki instance

Ensure to modify the 'access_key_id' and 'access_key_secret' fields with your credentials. Additionally, customise the 'bucketnames', 'endpoint', and 'region' fields to specify the object storage location.

Figure 9 depicts an example configuration tailored for Minio. After customising the configuration to match your environment, create the secret within the 'openshift-logging' namespace.

Now, proceed to create the custom resource by applying the provided YAML file as depicted in Figure 10, ensuring the necessary modifications tailored to your cluster's requirements.

In the provided YAML file, make the following edits according to your cluster's specifications:

- Specify a unique name for the LokiStack.
- Choose one of the available Loki deployment types: 1x.demo, 1x.extra-small, 1x.small, or 1x.medium, based on your cluster requirements.
- Provide the appropriate name for your storage class, suitable for temporary storage. For optimal performance, select a storage class that offers block storage.
- You can view the available storage classes using the 'oc get sc' command.