

```
>>> r = traceroute(["www.google.com"])
Begin emission:
Finished sending 30 packets.
*****
Received 30 packets, got 30 answers, remaining 0 packets
  216.58.215.36:tcp80
1 192.168.111.1 11
2 192.168.254.2 11
3 178.255.160.26 11
4 100.96.24.37 11
5 81.93.7.41 11
6 72.14.233.195 11
7 72.14.237.93 11
8 216.58.215.36 SA
9 216.58.215.36 SA
10 216.58.215.36 SA
11 216.58.215.36 SA
12 216.58.215.36 SA
13 216.58.215.36 SA
14 216.58.215.36 SA
15 216.58.215.36 SA
16 216.58.215.36 SA
17 216.58.215.36 SA
18 216.58.215.36 SA
19 216.58.215.36 SA
20 216.58.215.36 SA
21 216.58.215.36 SA
22 216.58.215.36 SA
23 216.58.215.36 SA
```

```
24 216.58.215.36 SA
25 216.58.215.36 SA
26 216.58.215.36 SA
27 216.58.215.36 SA
28 216.58.215.36 SA
29 216.58.215.36 SA
30 216.58.215.36 SA
```

The GeoLite2-City.mmdb file provides an association mapping between cities and IP addresses. After downloading the same, you can import them to your configuration environment as follows:

```
>>> conf.geoip_city = "/home/user/GeoLite2-City.mmdb"
```

Using the 'traceroute_map()' function, a world map showing the traceroute path can be viewed:

```
>>> traceroute_map("www.google.com")
```

The world map with the trace route path is shown in Figure 2.

Sniff

The 'sniff()' function is used to capture packets in real-time. You will need to press 'Ctrl+c' to stop capturing the packets.

```
>>> sniff()
^C<Sniffed: TCP:51 UDP:8 ICMP:0 Other:0>
```

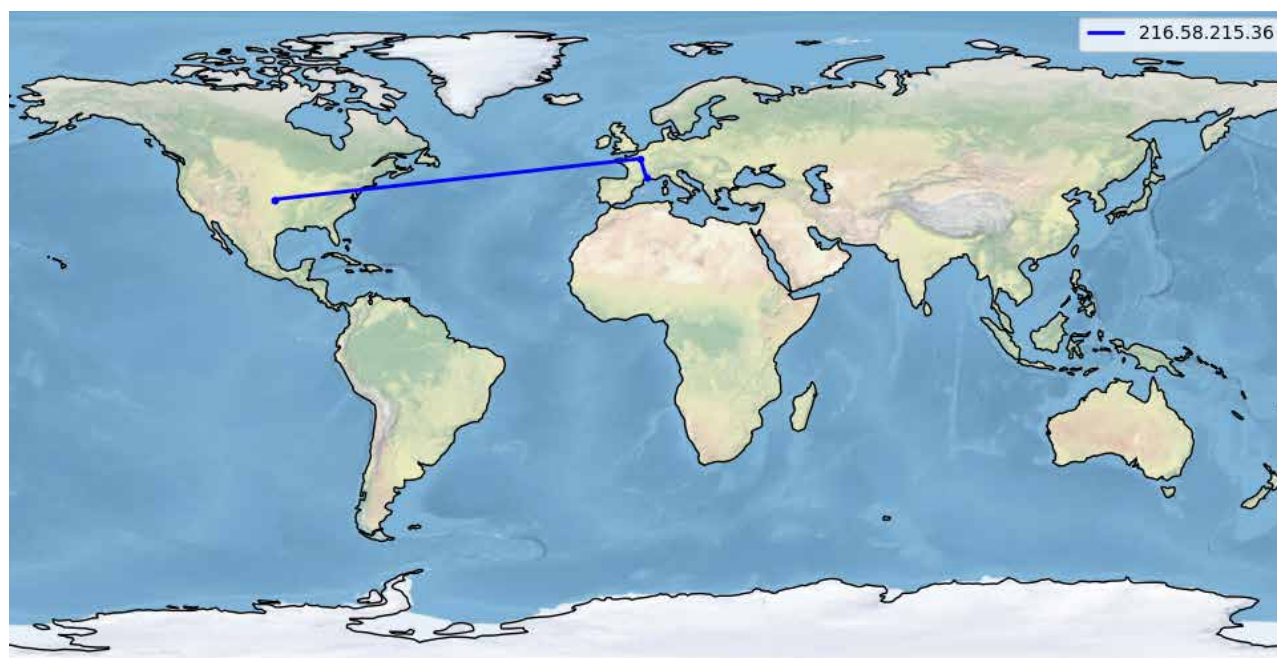


Figure 2: World trace map