

The SquashFS file is a compressed disk image that must be modified using the Cubic Ubuntu application. To install Cubic on a Linux-based OS or WSL, execute the following commands in the terminal:

```
sudo apt-add-repository universe
sudo apt-add-repository ppa:cubic-wizard/release
sudo apt update
sudo apt install --no-install-recommends cubic
```



Figure 3: Cubic custom ISO creator

Once the application is opened, select the directory containing the Ubuntu ISO for editing. After clicking 'Next', a virtual machine environment is created, allowing you to insert the boot file inside SquashFS.

Integrate the boot script to query the Gemini API using a code structure similar to the example given below.

```
query_gemini() {
    read -p "prompt : " prompt
    #echo $prompt
    local response=$(curl -s "https://generativelanguage.
    googleapis.com/v1beta/models/gemini-1.5-flash:>-H 'Content-
    Type: application/json' \
    -X POST \
    -d "{\"contents\": [{\"parts\": [{\"text\": \"$prompt\"}]}}")
    echo "$response" | grep -oP '"text":\s*"K[^"]*' | head -n1
}
```

Once the changes are saved using *Ctrl+X*, navigate to the root directory using the command *cd/* and edit the *rc.local* file to include the script in the system's startup process. After making the necessary modifications, click *Next*, and the

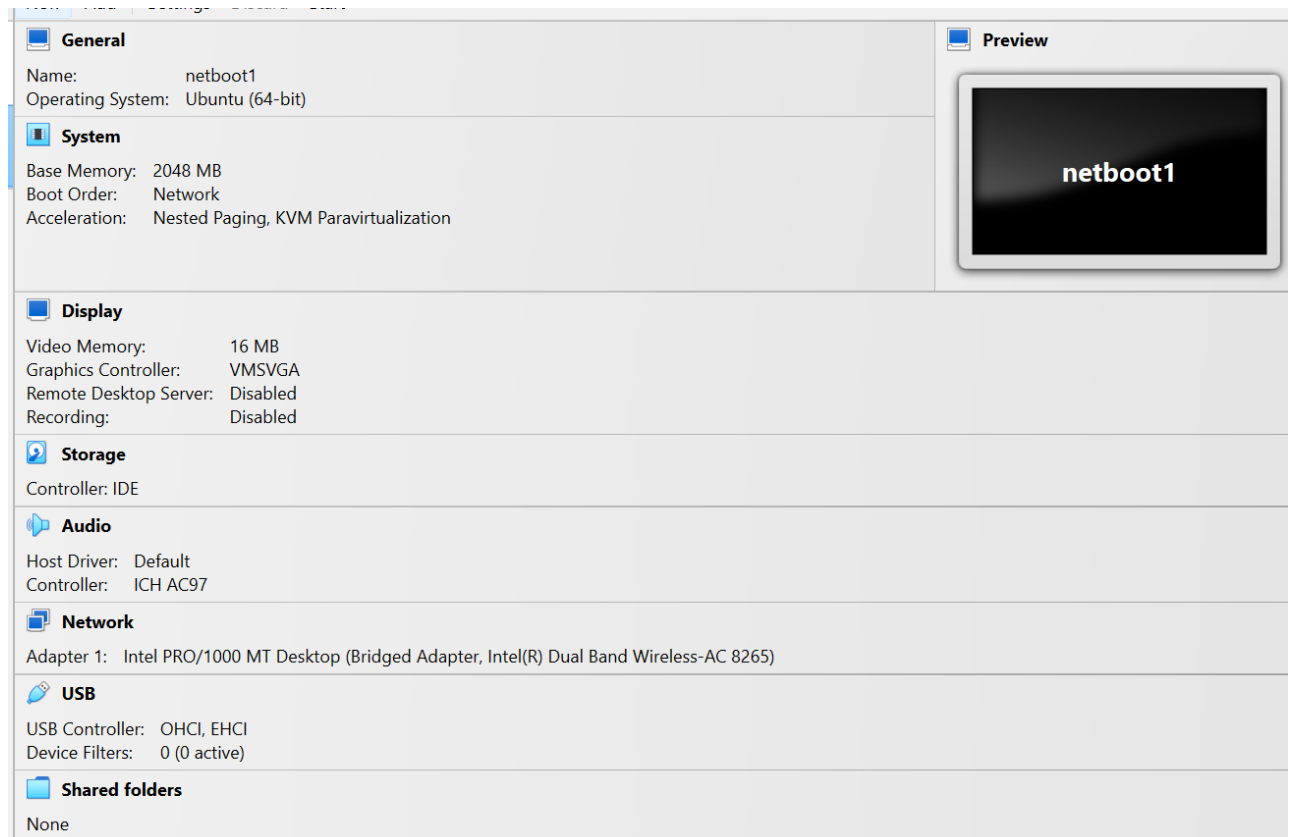


Figure 4: Netbooting VM configuration