

```

- "38080:8080"
environment:
- "MO_CONFIG=/etc/config.json"
restart: unless-stopped

networks:
default:
name: statuspage-demo
external: true

```

config.json

```

{
  "version": "2.0",
  "columns": 2,
  "tiles": [
    { "type": "PING", "params": { "hostname": "127.0.0.1" },
    { "type": "PORT", "params": { "hostname": "129.0.0.1",
    "port": 8080 },

    { "type": "HTTP-STATUS", "params": { "url": "https://google.
com" } },
    {
      "type": "GROUP",
      "label": "localhost PING/PORT/HTTP Tests",
      "tiles": [
        {
          "type": "PING",
          "params": {
            "hostname": "128.0.0.1"
          }
        },
        {
          "type": "PORT",
          "params": {
            "hostname": "127.0.0.1",
            "port": 8080
          }
        },
        {
          "type": "HTTP-STATUS",
          "params": {
            "url": "http://localhost:8080"
          }
        }
      ]
    }
  ]
}

```

Let's now analyse the Monitoror configuration. The configuration file defines an arrangement of the desired monitoring tiles in a given number of columns. If the columns are less than the number of tiles, the screen is filled vertically too. An array of tiles is defined for various monitoring checks on the wallboard. The ping, port and HTTP-status tiles are self-explanatory. We have also defined a tile of the type 'group', which shows a single rectangular area to represent multiple checks. The group tile will be red, showing information about failing check(s) in case a single or multiple checks in the group fail. This kind of tile is useful to pack in more checks in a limited single page area. Please go through the Monitoror documentation for the complete information on monitorable tiles and their respective parameters, etc. Even if you need to run Monitoror natively, go to the appropriate Golang static binary from its GitHub release page and run it after making that executable.

Execute the following command to launch the Monitoror container:

```

docker run -it --rm -v /var/run/docker.sock:/var/run/docker.
sock:ro -v ./monitoror_stack.yml:/etc/compose/monitoror_
stack.yml:ro docker docker compose -f /etc/compose/monitoror_
stack.yml up -d

```

Finally, execute the following command to supply the required Monitoror configuration to the demo tiles monitoring localhost in its container, which is running on port 8080:

```

docker run -it --rm -v /var/run/docker.sock:/var/run/docker.
sock:ro -v ./config.json:/etc/monitoror/config.json:ro -v ./
monitoror_stack.yml:/etc/compose/monitoror_stack.yml:ro
docker docker compose -f /etc/compose/monitoror_stack.yml cp
/etc/monitoror/config.json monitoror:/etc/config.json

```

Now access the Monitoror wallboard page in your browser at localhost:38080 and you should see a page with monitoring tiles as shown in Figure 1.

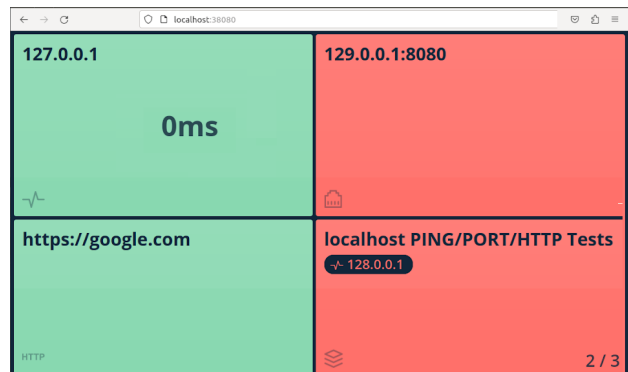


Figure 1: Monitoror wallboard page