

We have intentionally provided false IP addresses in the demo config file to show how failing tiles look on the wallboard. Monitoror picks up config changes as it checks for those at an interval while running. Now let's correct the invalid IP addresses and introduce a typo in the HTTP-status tile by changing the *config.json* as shown below:

```
6,7c6,7
< { "type": "PORT", "params": {"hostname": "129.0.0.1",
"port": 8080}},
< { "type": "HTTP-STATUS", "params": {"url": "https://
google.com"}},
---
> { "type": "PORT", "params": {"hostname": "127.0.0.1",
"port": 8080}},
> { "type": "HTTP-STATUS", "params": {"url": "https://
gogle.com"}},
15c15
<     "hostname": "128.0.0.1"
---
>     "hostname": "127.0.0.1"
```

Next, provide Monitoror your new config through the following command:

```
docker run -it --rm -v /var/run/docker.sock:/var/run/docker.
sock:ro -v ./config.json:/etc/monitoror/config.json:ro -v ./
monitoror_stack.yml:/etc/compose/monitoror_stack.yml:ro
docker docker compose -f /etc/compose/monitoror_stack.yml cp
/etc/monitoror/config.json monitoror:/etc/config.json
```

The Monitoror wallboard should now reflect the new configuration, as shown in Figure 2.

Correcting the typo in the HTTP tile URL and copying the new config should show only green on the wallboard, as shown in Figure 3.

Our second demo is about using the Monitoror wallboard with tiles monitoring some popular modern cloud servers. Modify the *monitoror_stack.yml* as per

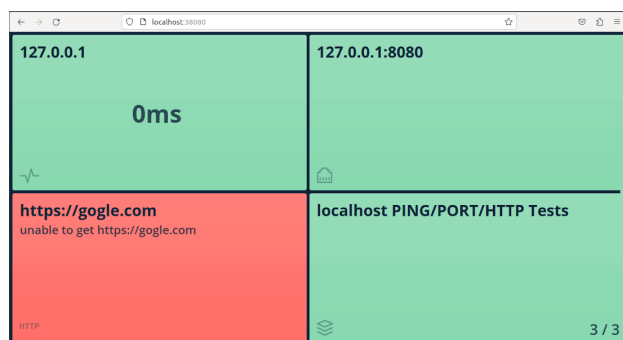


Figure 2: Failing the HTTP check

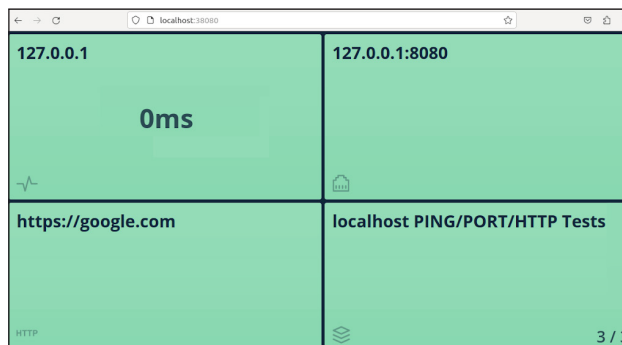


Figure 3: A wallboard that shows all checks have been passed

the diff shown below to launch single instances of Kafka, OpenSearch and Redis as well:

```
diff monitoror_stack.yml
8a9,36
> - "MO_MONITORABLE_HTTP_SSLVERIFY=false"
> restart: unless-stopped
>
> opensearch:
>   image: opensearchproject/opensearch:${OSRHTAG:-latest}
>   environment:
>     - "discovery.type=single-node"
>   restart: unless-stopped
>
> kafka:
>   image: apache/kafka-native
>   ports:
>     - "9092:9092"
>   environment:
>     KAFKA_LISTENERS: CONTROLLER://localhost:9091,HOST://0
.0.0.0:9092,DOCKER://0.0.0.0:9093
>     KAFKA_ADVERTISED_LISTENERS: HOST://
localhost:9092,DOCKER://kafka:9093
>     KAFKA_LISTENER_SECURITY_PROTOCOL_MAP: CONTROLLER:PLAI
NTEXT,DOCKER:PLAINTEXT,HOST:PLAINTEXT
>     KAFKA_NODE_ID: 1
>     KAFKA_PROCESS_ROLES: broker,controller
>     KAFKA_CONTROLLER_LISTENER_NAMES: CONTROLLER
>     KAFKA_CONTROLLER_QUORUM_VOTERS: 1@localhost:9091
>     KAFKA_INTER_BROKER_LISTENER_NAME: DOCKER
>     KAFKA_OFFSETS_TOPIC_REPLICATION_FACTOR: 1
>   restart: unless-stopped
>
> redis:
>   image: redis:${RDSSTAG:-latest}
>   command: "redis-server --save 60 1 --loglevel warning"
```

Now modify the *config.json* to include tiles monitoring the new servers as per the diff shown below: