

```

> return $?
> '''
> ]
63,64c89,96
< id = "http"
< label = "HTTP"
---
> id = "redis"
> label = "REDIS"
> [[probe.service.node]]
> id = "redisping"
> label = "Redis Ping"
> mode = "poll"
> reveal_replica_name = true
> replicas = ["icmp://redis"]
66,67c98,99
< id = "googlehttp"
< label = "Google Http Probe"
---
> id = "redisport6379"
> label = "Redis Port 6379"
69c101,102
< replicas = ["https://google.com"]
---
> reveal_replica_name = true
> replicas = ["tcp://redis:6379"]

```

Execute the commands used previously to launch containers, copy the updated config and restart Vigil respectively. Now refresh the status page and you should see the updated page as shown in Figure 6.

You can see how user-friendly and interactive the status page looks to help you instantly figure out where the probes are passing or failing. The tool tips show the replica details as well on hovering the mouse if you add `reveal_replica_name = true` setting in every `probe.service.node` subsection. The Vigil status page enables you to add a large number of probe targets due to its vertical scrolling. Please note that the OpenSearch HTTP probe is failing here, as currently there is no way to turn off the SSL certificate through the `config` file. We can solve this issue by using the script probe provided by Vigil. We'll just create an inline script making use of the `curl` command with a flag to skip SSL certificate checks. Let's create a new image for Vigil using the following command:

```
docker build -f Dockerfile_VigilSSLCertIgnore . -t
vigilsci:v1.27.0
```

...after creating `Dockerfile_VigilSSLCertIgnore` in the current working directory as shown below:

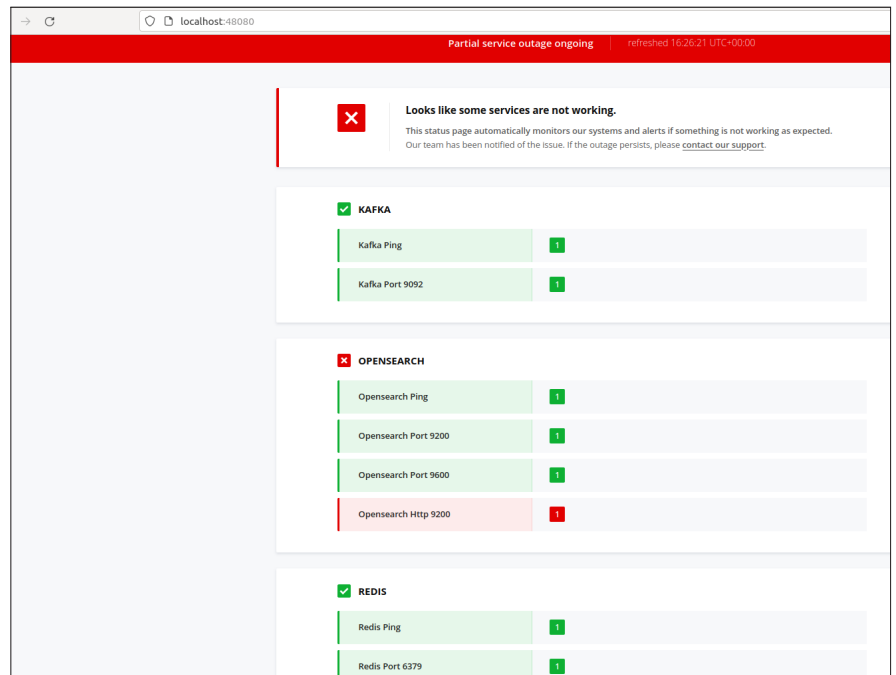


Figure 6: Vigil status page for multiple services probes

Dockerfile_VigilSSLCertIgnore

```
FROM valeriansaliou/vigil:v1.27.0
```

```
RUN apk --no-cache add curl
```

You also need to modify the `vigil_stack.yml` and `config.cfg` files as per the diffs shown below:

diff vigil_stack.yml

```

4c4
< image: valeriansaliou/vigil:${VGILTAG:-v1.27.0}
---
> image: vigilsci:${VGILTAG:-v1.27.0}
26a27
>

```

diff config.cfg

```

79c79
< mode = "poll"
---
> mode = "script"
81c81,86
< replicas = ["https://admin:admin@opensearch:9200"]
---
> scripts = [
> '''

```