

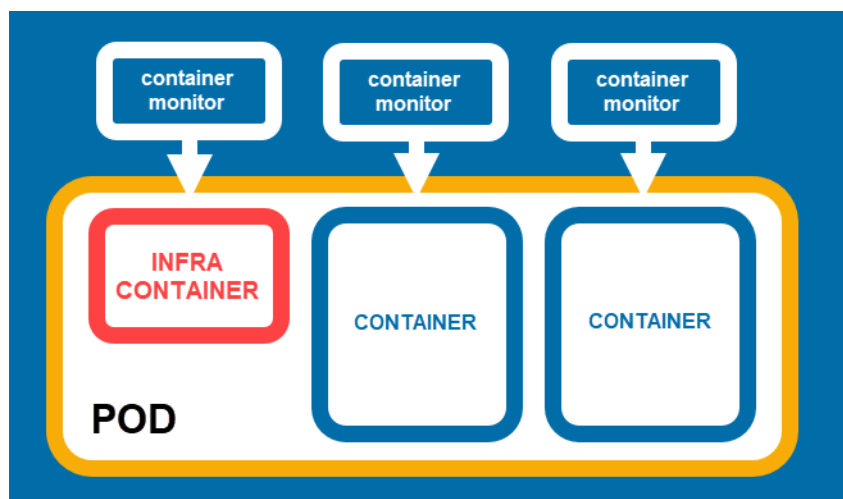


Figure 1: A pod in Podman

where untrusted containers are used.

Pod support: Podman extends beyond individual containers by introducing pods, which are groups of containers that share the same network and storage resources (Figure 1). This aligns with Kubernetes concepts, enabling a smoother transition from development to production environments using Kubernetes.

OCI-compliant image

management: Podman supports OCI-compliant images—a key standard in the container ecosystem. This allows Podman to pull and run images from Docker Hub or any other OCI registry without compatibility issues.

Docker-like CLI: Podman's CLI is almost identical to Docker's. Commands like `podman run`, `podman`

`pull`, and `podman stop` function just as they would in Docker. This makes migrating existing container workflows and scripts from Docker to Podman straightforward.

Podman usage and application

Setup and example: Getting started with Podman is easy. To install it on a Linux system, you can use the following commands depending on the distribution.

- For Fedora/CentOS/RHEL:

```
sudo dnf install podman
```

- For Ubuntu/Debian:

```
sudo apt install podman
```

Once installed, you can run a simple container like Alpine Linux using the following command:

```
podman run -it alpine /bin/sh
```

This will pull the Alpine image from the container registry and start a shell session.

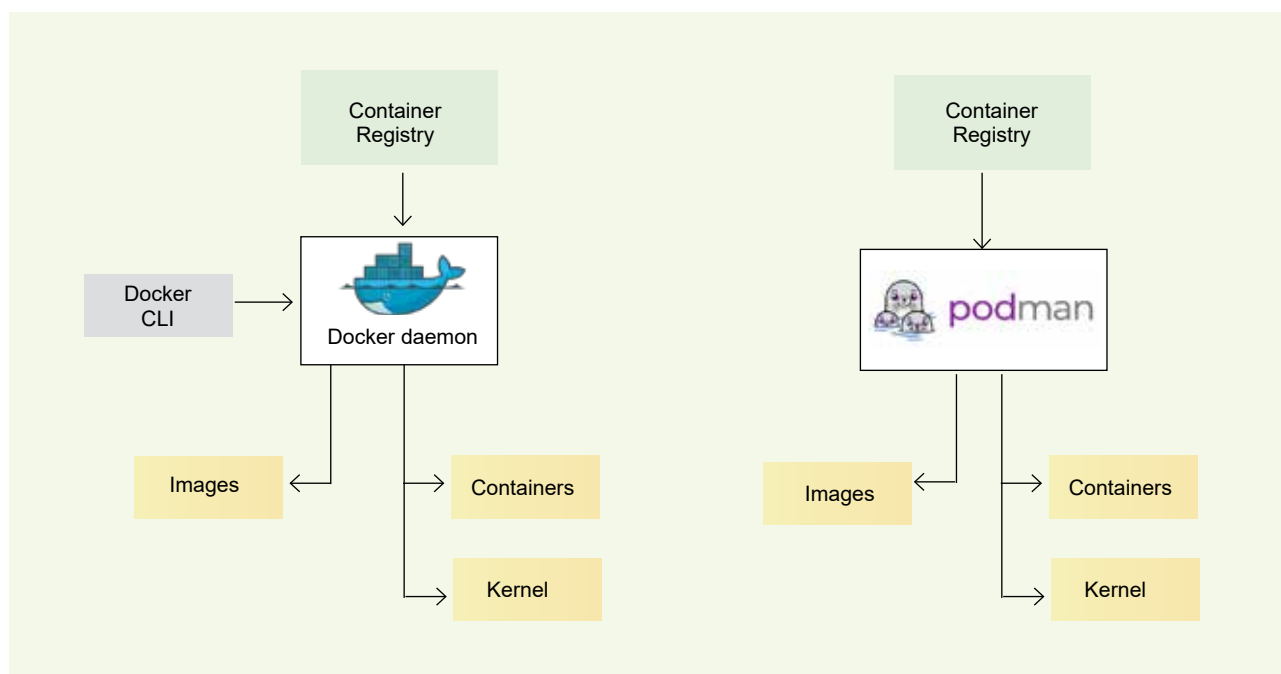


Figure 2: Podman vs Docker