

Examples: Firebase, AWS Amplify, Supabase

How it works

Serverless computing takes away the complexity of infrastructure management, allowing you to focus solely on your code. Here's how it works.

Function as a service (FaaS) core:

Serverless computing often revolves around function as a service (FaaS). Instead of deploying entire applications or servers, you write small, self-contained functions that handle specific tasks. These functions are only triggered when certain events occur (e.g., an HTTP request, file upload, or database change). Once the function completes, it automatically shuts down, saving resources and cost.

Dynamic scaling: Serverless environments automatically scale based on demand. If your application gets 10 requests, the platform runs 10 instances of your function, each handling one request. If there are 10,000 requests, it can scale up to handle all of them simultaneously, without you having to intervene or configure any servers.

Pay-per-execution: One of the most appealing aspects of serverless computing is that you only pay for what you use. Since functions only run when triggered, you're charged based on the

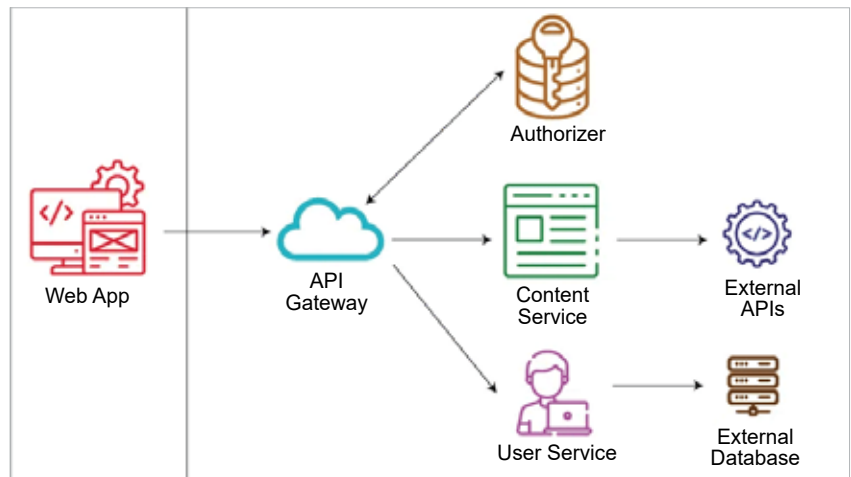


Figure 2: FaaS

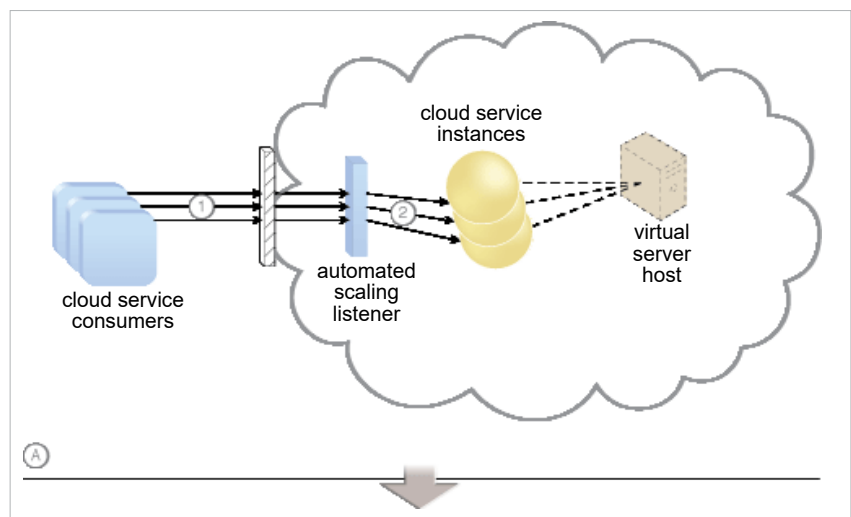


Figure 3: Dynamic scaling

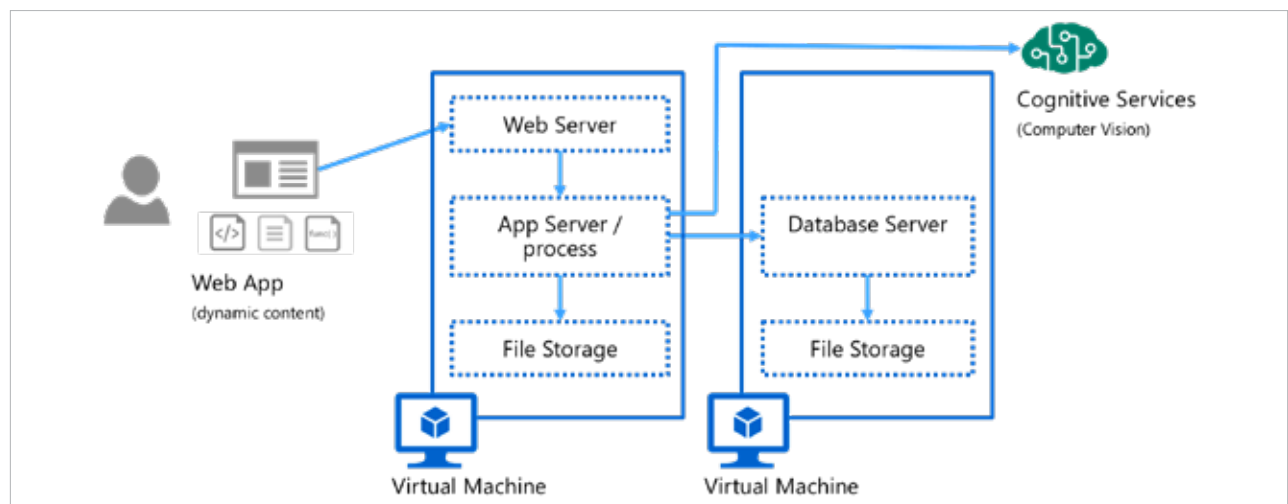


Figure 4: Event-driven architecture