

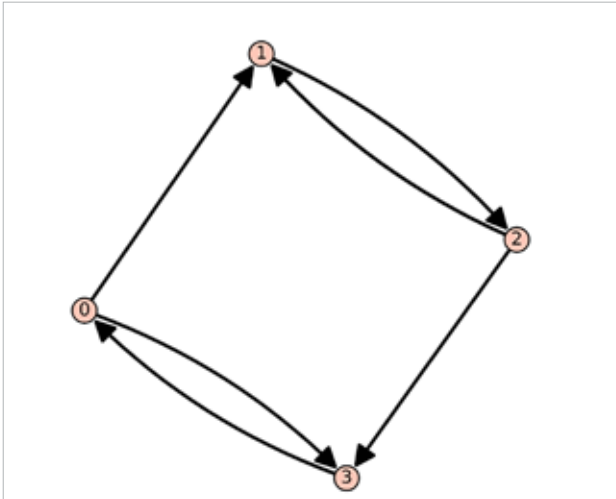


Figure 7: The directed multigraph *Dmultigraph\_15*

I posed earlier. The line of code `'rgraph = graphs.RandomGNP(8, 0)'` will generate a graph with 8 isolated

vertices and 0 edges, regardless of how many times you execute it. This happens because the probability of edge creation is zero, as the second parameter provided is 0.

In this article also, we have explored some important types of graphs that can be used to analyse real-world scenarios. Keep in mind that there are many other complex graph variants that can be used to explore even more intricate real-world situations. However, those are beyond the scope of this series, in which our focus is on undirected graphs, directed graphs, multigraphs, mixed graphs, and mixed multigraphs. In the next article in this series, we will delve into several key graph-theoretic methods and topics before concluding our discussion on graph theory and moving on to other mathematical topics of interest. **END!** 🐧

**By: Dr Deepu Benson**

The author is assistant professor at Chinmaya Vishwa Vidyapeeth (deemed to be university), Ernakulam, Kerala. He is a free software enthusiast, and is interested in theoretical computer science.

## THE COMPLETE MAGAZINE ON OPEN SOURCE



- >> To find dealers to buy copy from news-stand, visit: [www.ezine.lfyimag.com](http://www.ezine.lfyimag.com)
- >> To subscribe, visit: [pay.efyindia.com](http://pay.efyindia.com)
- >> To buy an ezine edition, visit: [www.magzter.com](http://www.magzter.com) choose Open Source For You