

- Set up the validations, checking whether the *Response Code* is 200.
- The result is positive, as the *Response Code* is 200.

Bonus step: Record and run

- Let's say we have many rest APIs to be tested in a single page and have to create many samplers manually, which can be tiresome. For example, in Amazon, several API hits are needed to form the home page, such as deals, products, bestsellers, user menu, etc.
- JMeter has a solution — record and run. A step-by-step example is shared at https://jmeter.apache.org/usermanual/jmeter_proxy_step_by_step.pdf.

 **Note:** The Firefox browser supports this feature. We just need to make sure we have access to update the settings in it.

Command line

You can run JMeter from the command line and can have its output redirected to an HTML as well. The non-GUI mode brings in more flexibility when running heavy loads. But the configuration can still be done using the GUI, and the results can be analysed too.

A sample command is given below:

```
$ jmeter -n -t GoogleHomePageTestSearch.
jmx -l GoogleHomePageTestSearch.jtl -e
-o googletestoutput
```

- -n: to run in non-gui mode
- -t: name of JMX file having the Test Plan
- -l: Name of JTL(JMeter text logs) file to log results
- -e: generate report dashboard after load test
- -o: output folder where to generate the report dashboard after load test. Folder must not exist or be empty

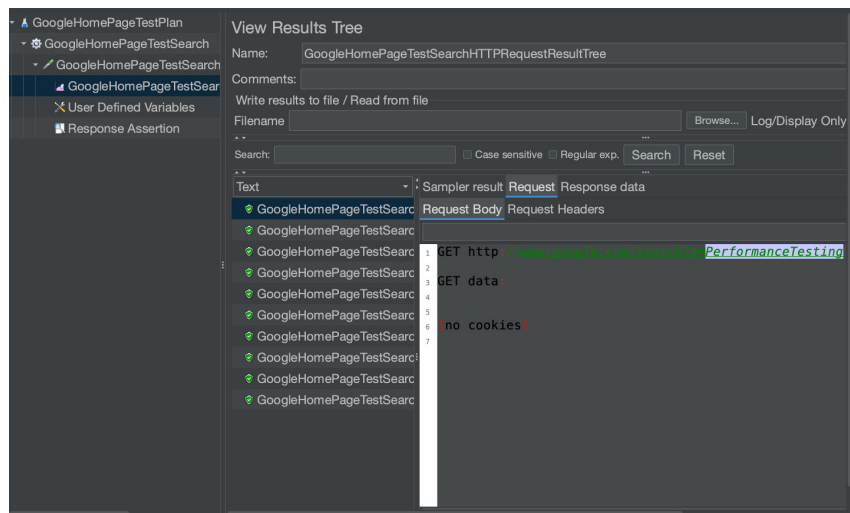


Figure 8: Result tree; the user defined variable has been used in the GET request

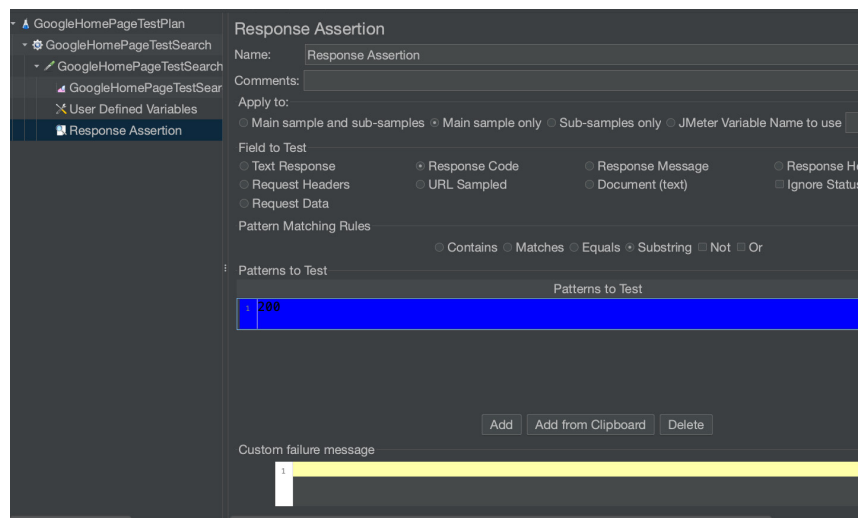


Figure 9: Define the rules to evaluate the response from the sampler execution

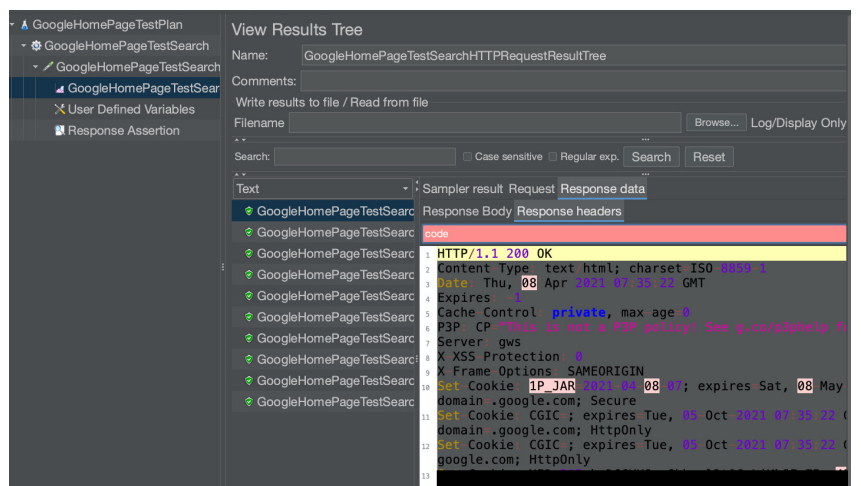


Figure 10: Response is 200; hence the test result is shown as passed (green)