

Integration of OnlineStats is facilitated with *reduce()* and *groupreduce()*. Code examples are as shown below:

```
julia> using JuliaDB, OnlineStats

julia> t = table(1:100, rand(Bool, 100), randn(100));

julia> reduce(Mean(), t; select = 3)
Mean: n=100 | value=-0.0439736
```

For *groupreduce()*, the code is:

```
julia> grp = groupreduce(Mean(), t, 2; select=3)
Table with 2 rows, 2 columns:
1      2
```

```
false Mean: n=42 | value=-0.0488427
true  Mean: n=58 | value=-0.0404477
```

To summarise, JuliaDB has

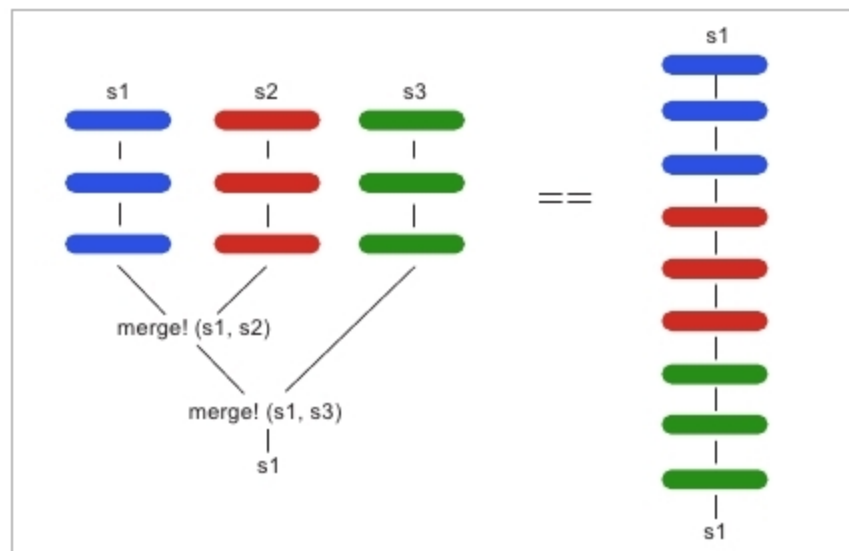


Figure 6: JuliaDB parallel computation


various features to process data. With the inherent speed advantage of Julia and the support for parallelism, JuliaDB's performance is superior to that of its counterparts. If you are a data science enthusiast, you may find JuliaDB very useful. **END** 🐧

References

- [1] JuliaDB: <https://juliadb.org/>
- [2] Julia Language: <https://julialang.org/>
- [3] JuliaDB Tutorial: <https://juliadata.github.io/JuliaDB.jl/latest/tutorial/>
- [4] <https://juliadata.github.io/JuliaDB.jl/latest/>

By: Dr K.S. Kuppasamy

The author is assistant professor of computer science, School of Engineering and Technology, Pondicherry Central University. He has 14+ years of teaching and research experience in academia and industry. His research interests include accessible computing, Web information retrieval and mobile computing.

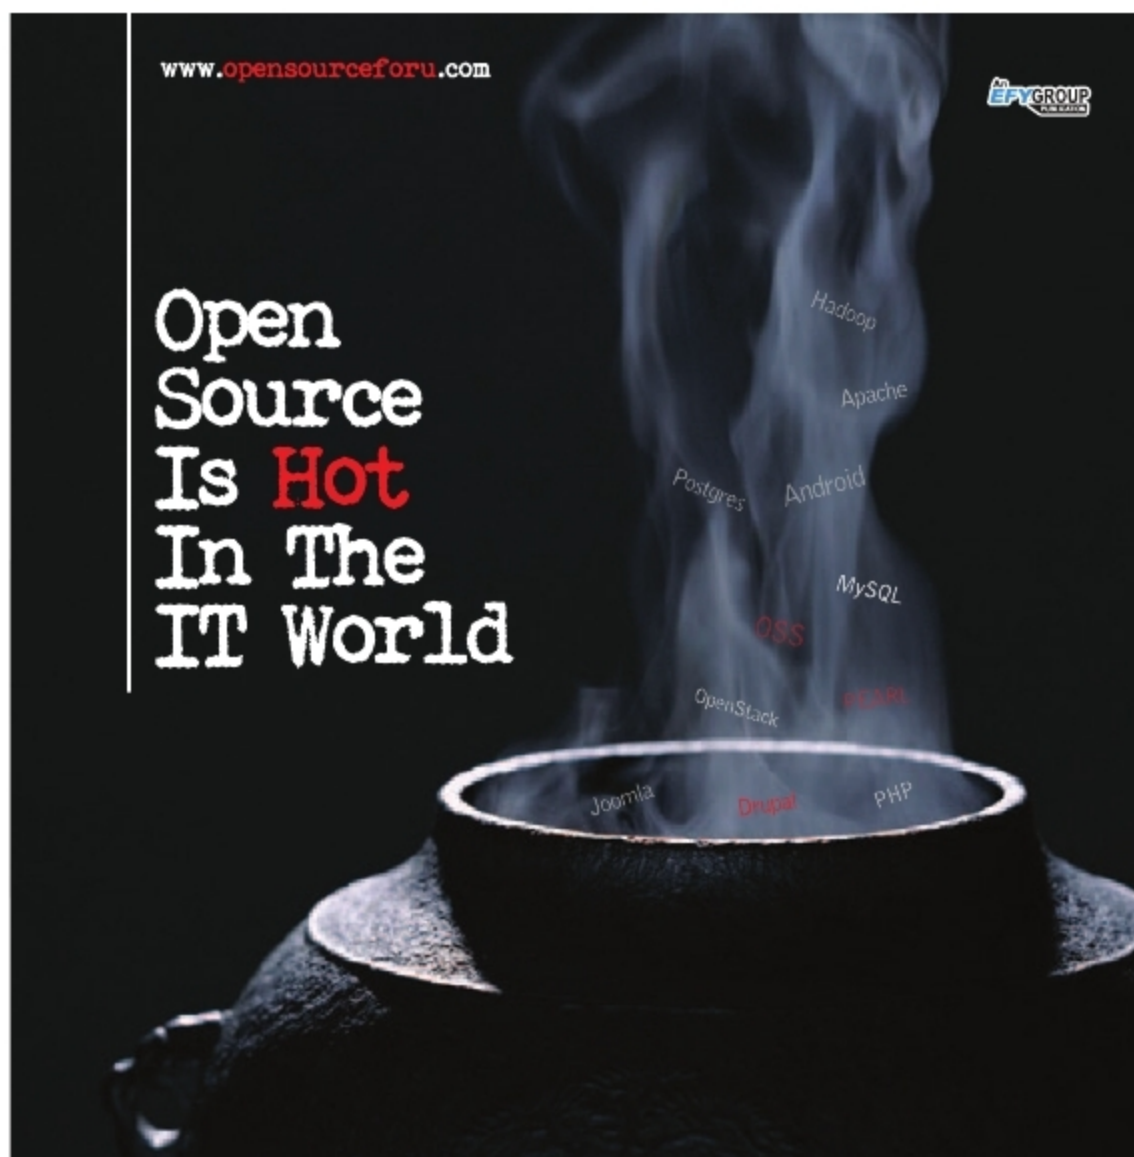

THE COMPLETE MAGAZINE ON OPEN SOURCE



- >> To find dealers to buy copy from news-stand, visit: www.ezine.lfyimag.com
- >> To subscribe, visit: pay.efyindia.com
- >> To buy an ezine edition, visit: www.magzter.com choose Open Source For You