

```
$ export NODE_PORT=$(kubectl get --namespace default -o jsonpath="{.spec.ports[0].nodePort}" services wordpress)
export NODE_IP=$(kubectl get nodes --namespace default -o jsonpath="{.items[0].status.addresses[0].address}")
echo "WordPress URL: http://$NODE_IP:$NODE_PORT/"
echo "WordPress Admin URL: http://$NODE_IP:$NODE_PORT/admin"
WordPress URL: http://192.168.99.101:31556/
WordPress Admin URL: http://192.168.99.101:31556/admin
```

Figure 3: Helm access

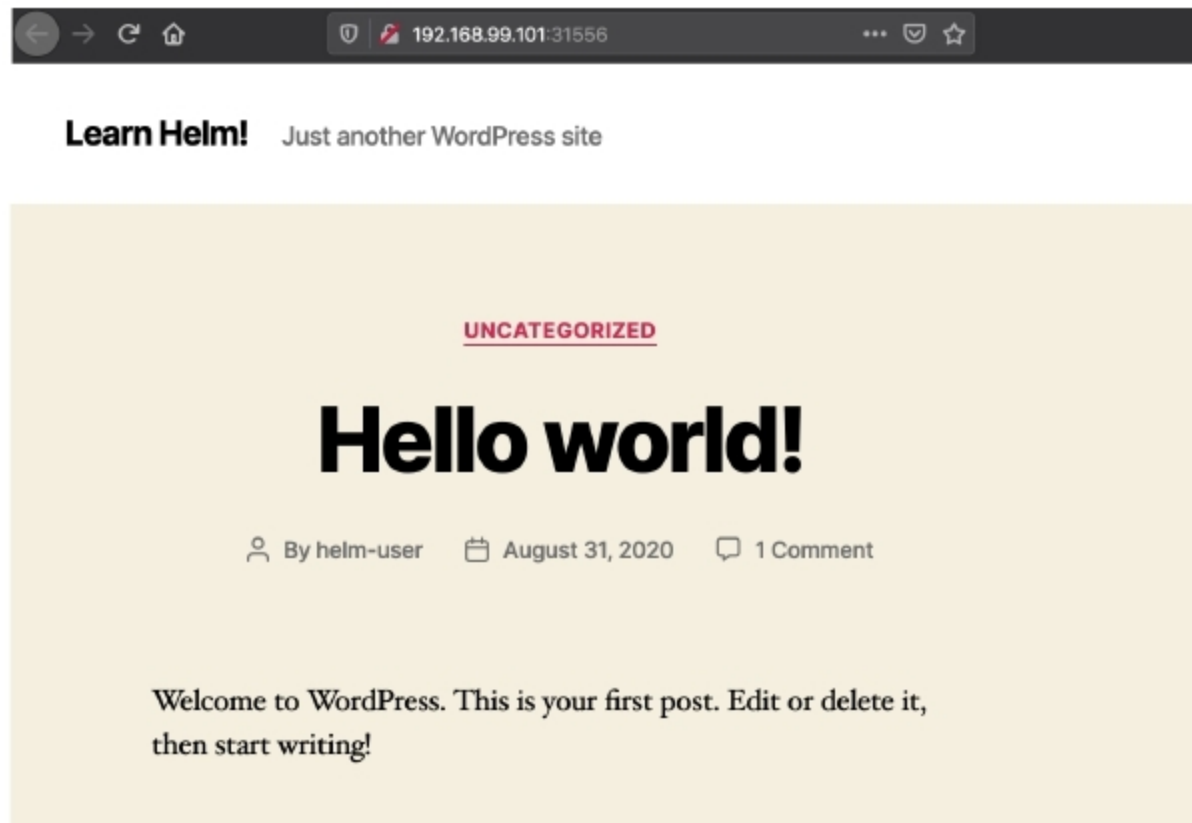


Figure 4: WordPress

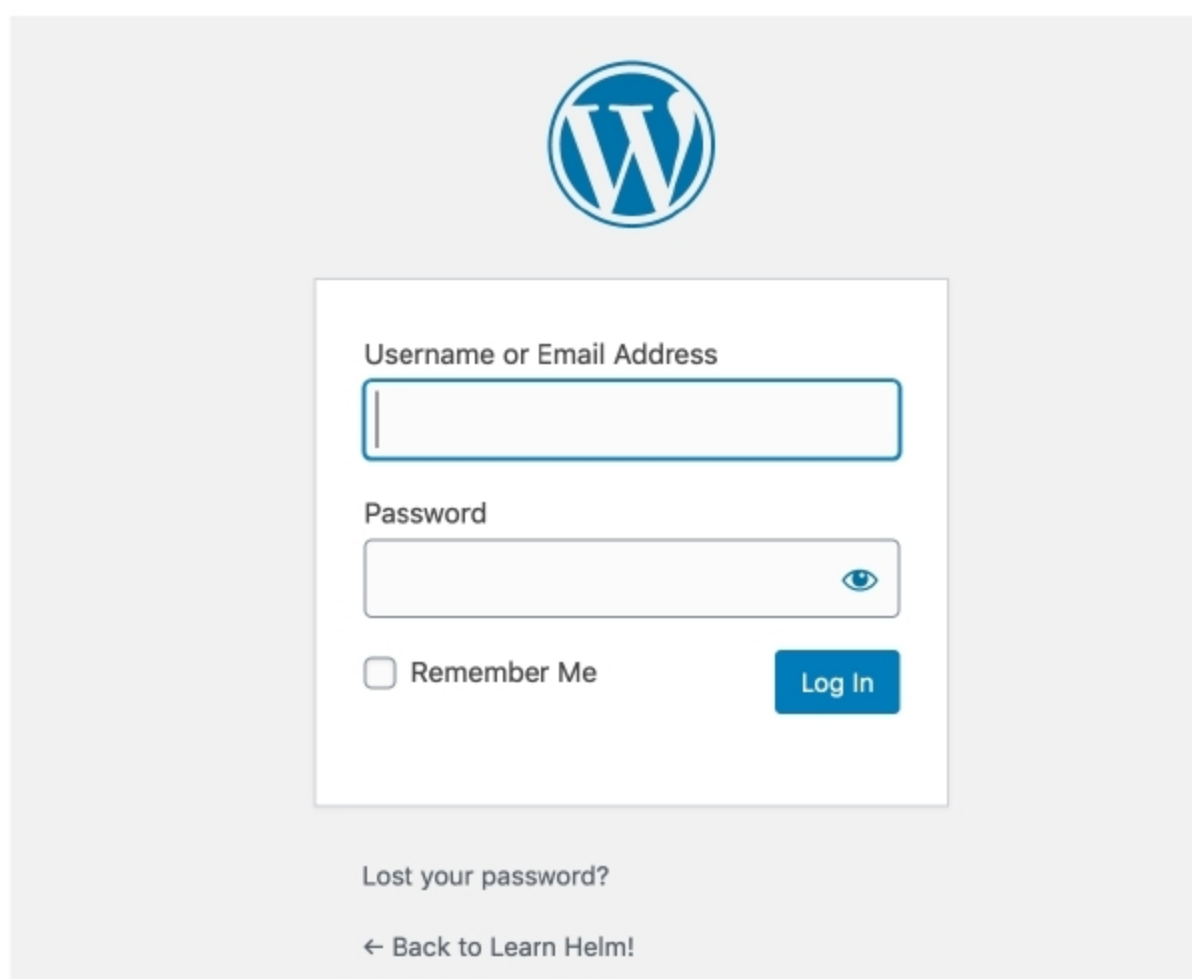


Figure 5: Wordpress admin

Installing chart

Let us now install chart. In this case, we will be installing WordPress chart as an example.

You can search for chart using the *helm search* command:

You can configure chart using image parameters. You can check accepted values for such parameters by specifying the following command:

```
$ helm show values bitnami/WordPress
```

You can override the values by creating a *values* file. Let us create a new file called *values.yml* and specify the required values as a dictionary. A sample *values.yml* looks like this:

```
wordpressUsername: admin
wordpressPassword: mySkert@123
wordpressEmail: admin@example.org
wordpressFirstName: admin
wordpressLastName: helm_user
wordpressBlogName: My Helm Chart
service:
  type: NodePort
```

You can install the desired chart using the *helm install* command given in Figure 2.

Figure 3 shows how to access your newly installed WordPress app.

Paste the URL presented at the end, as shown in Figure 4.

You can access the WordPress admin page using a second URL in the *echo* command (Figure 5). **END** 🐧

Reference

Helm GitHub page - <https://github.com/helm/helm/>

By: Abhijeet Kasurde

The author works for Red Hat. He is a free and open source software evangelist who loves to explore new technologies and software.