

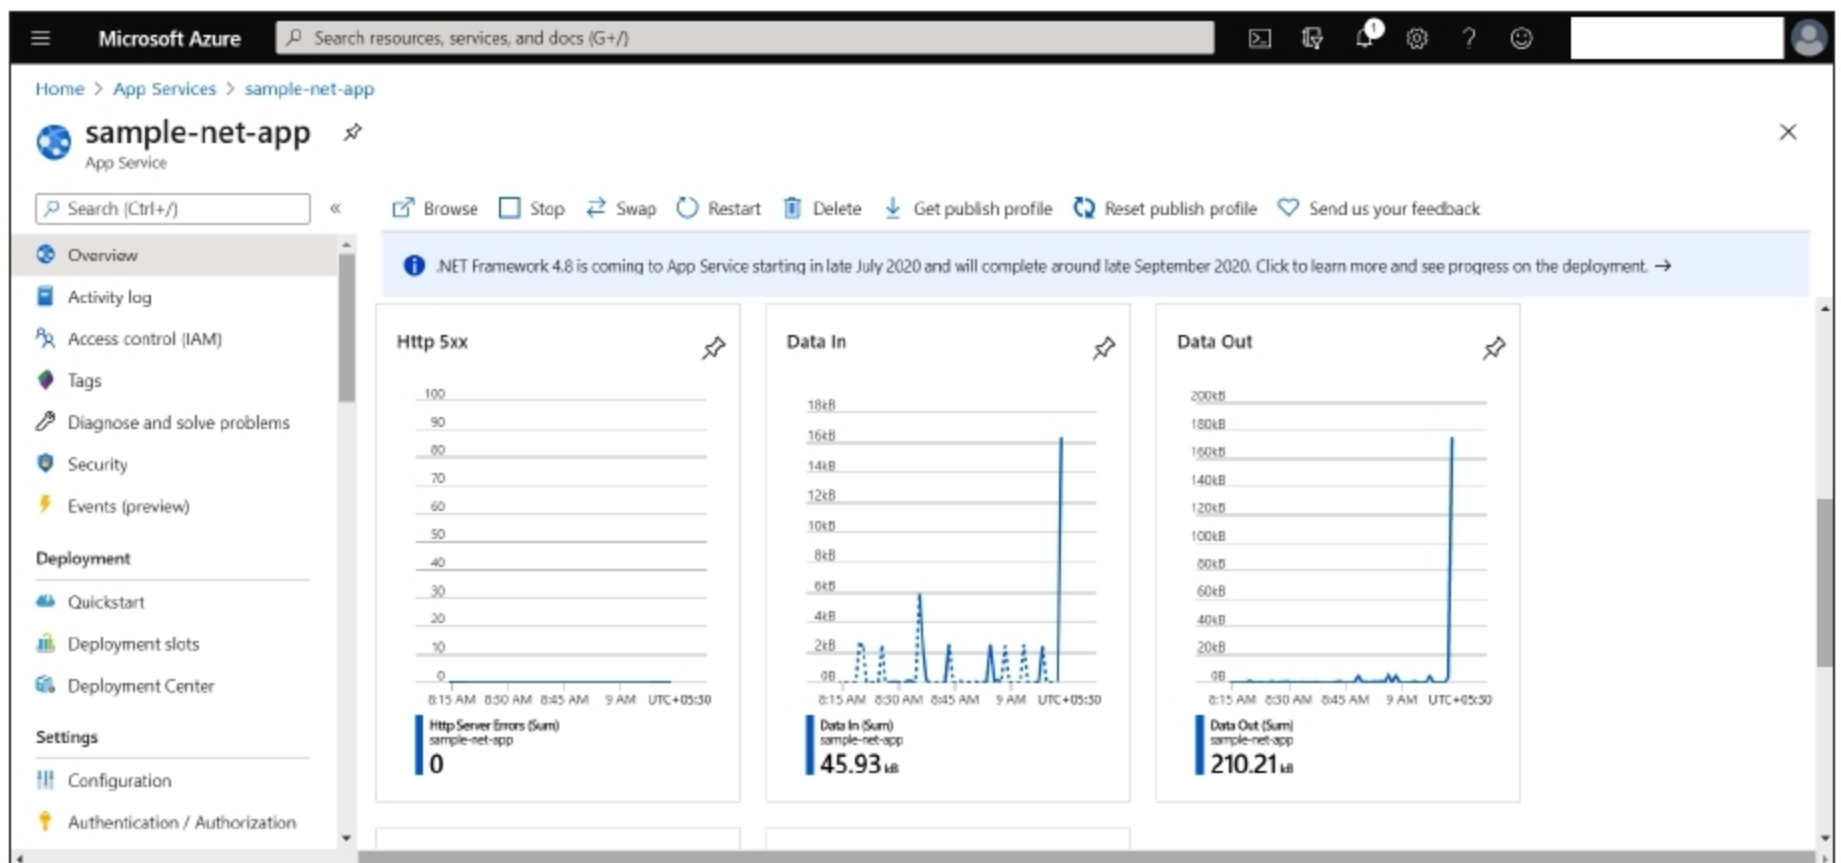


Figure 2: App Service monitoring

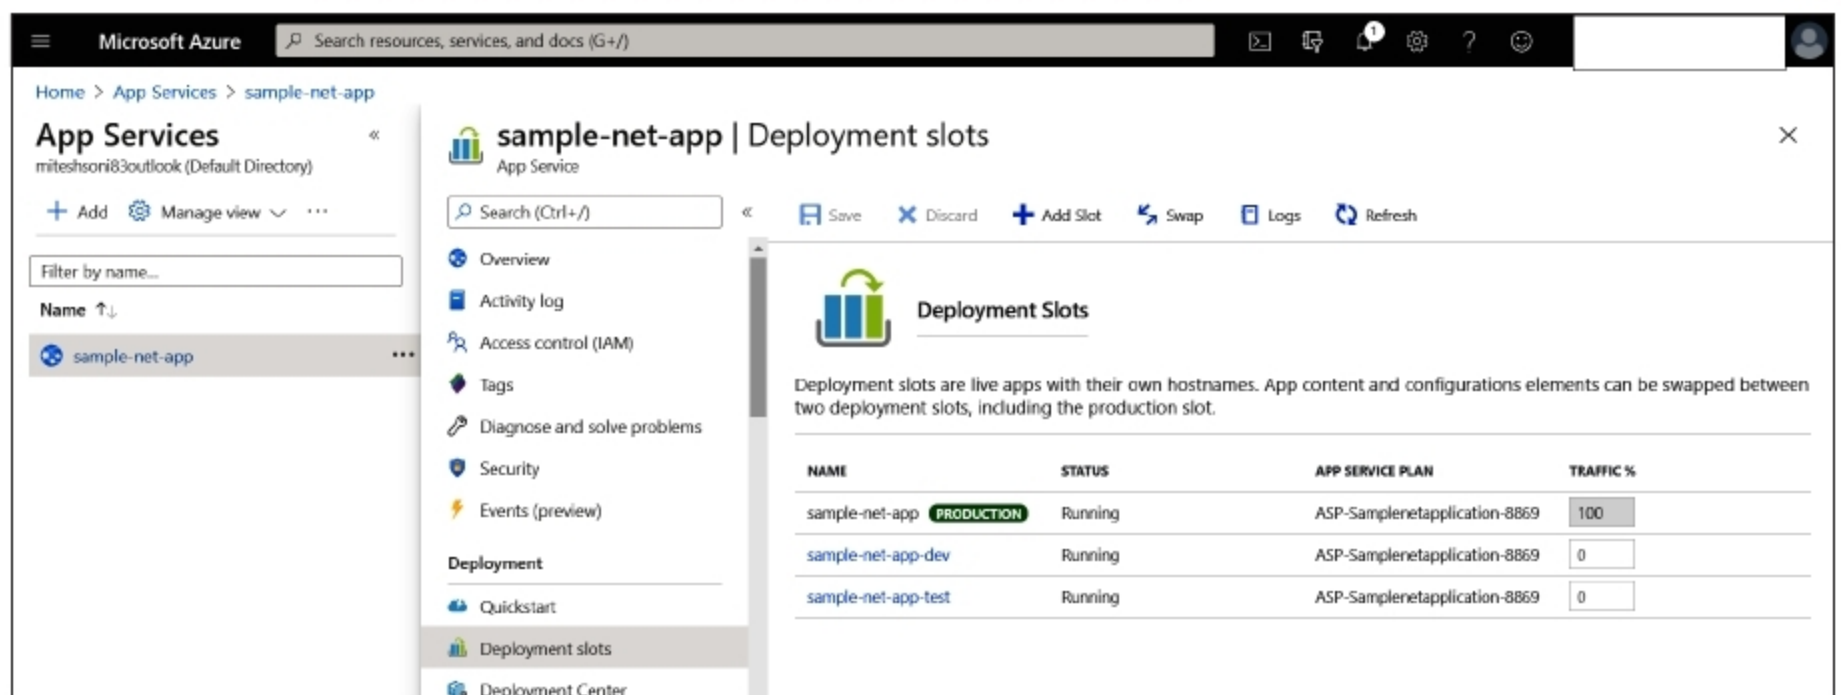


Figure 3: App Service: Deployment slots

Service. This includes the production slot as well. You can validate changes in the slots before you swap slots with the production slot, or deploy to production slot.

All instances available in the slot are warmed up and hence swapping them with the production slot will make them available in a ready-to-serve stage. This enables easy rollback as well. If you swap a slot with a production slot, but find some issues, then you can re-swap the slot. There is no extra charge for the feature.

Deployment centre

The deployment centre in Azure App Service allows continuous deployment from such repositories as Azure Repos, GitHub and BitBucket. It provides a centralised overview and control on the deployments supported using Kudu or Azure pipelines.

Configuration settings

In Azure App Service, app settings are used as environment variables. The connection strings section contains database connection strings, and these are available as environment variables.

Connection strings are prefixed based on the type and database (Table 2).

Database	Connection string environment variable
PostgreSQL	POSTGRES-CONNSTR_
SQLServer	SQLCONNSTR_
MySQL	MYSQLCONNSTR_
SQLAzure	SQLAZURECONNSTR_
Custom	CUSTOMCONNSTR_

Table 2: Connection strings