

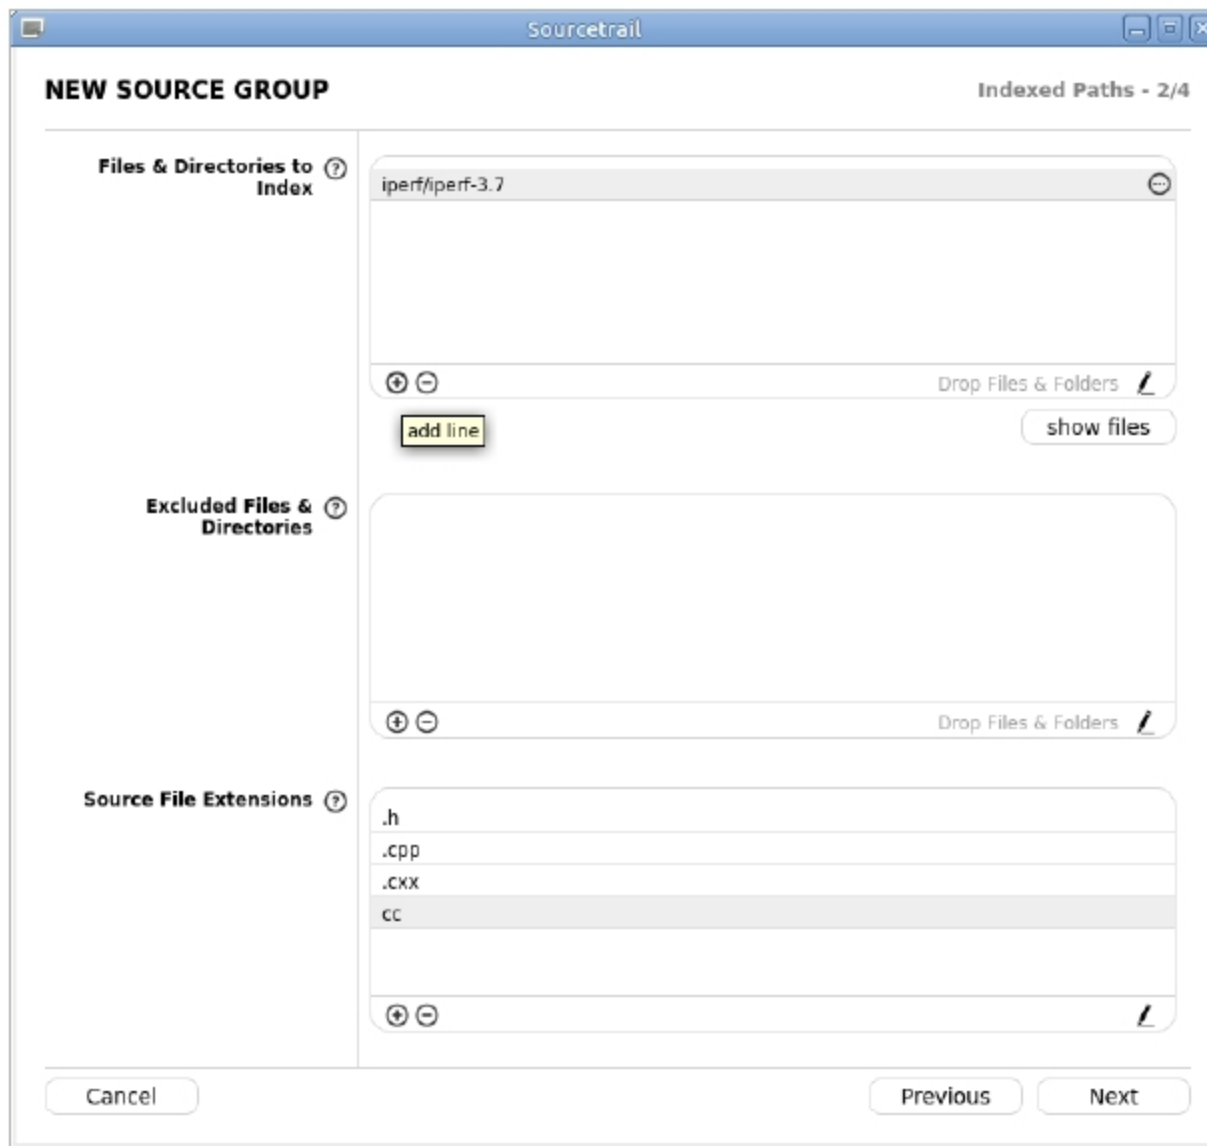


Figure 1: Attaching source group

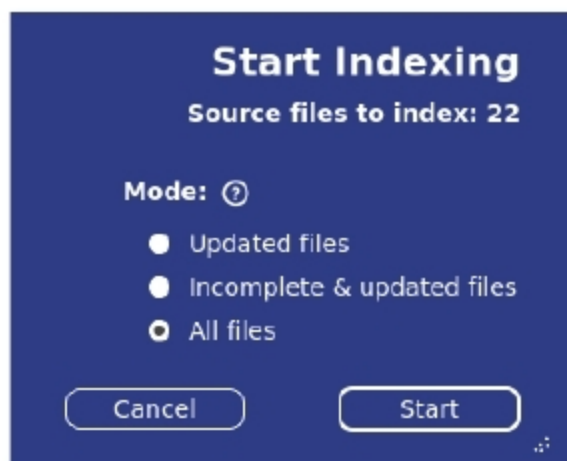


Figure 2: Start indexing code

- Select the path in which you would like to index the source (files and directories to index).
- Choose *Source File Extensions* (typically, *.h* should be fine).
- If your source depends on external header files, please select *Include Paths*.
- Choose any compiler flags necessary, e.g., symbol definitions required for conditional inclusion.
- Finally, click on *Create*, and then on *Start*.

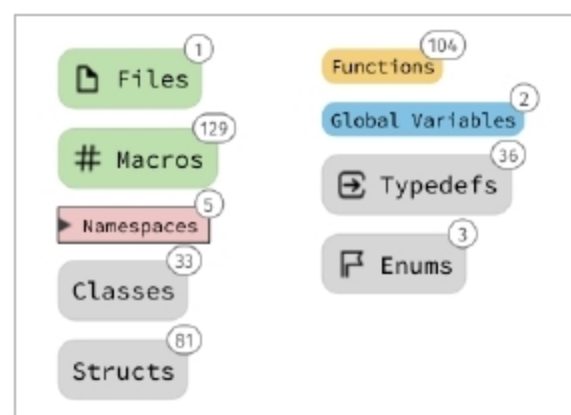


Figure 3: Code overview

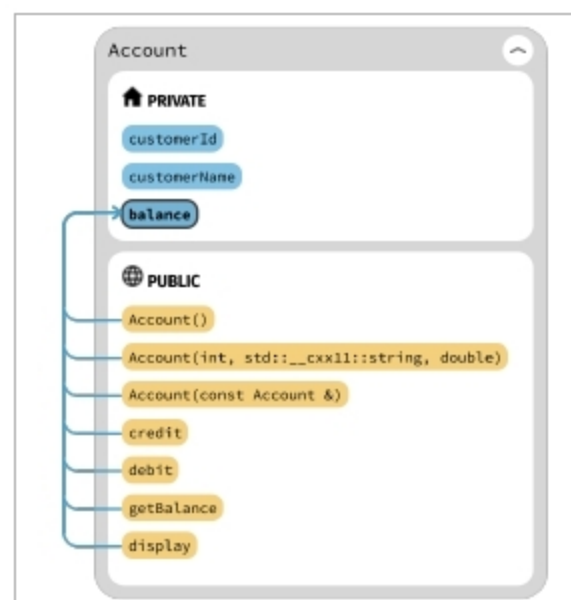


Figure 4: Visualisation of a class

A wizard will prompt you to start indexing code. The same wizard appears when you edit the project (menu path: *Project -> Edit Project*) or when you refresh the project manually.

Source visualisation and navigation

Once the indexing is complete, you can visualise the indexed code as external symbols like files, functions, classes, name spaces/packages, structs, unions, macros, typedefs, Enums, global variables, etc. The summary of indexing is on the right side pane.

You may ignore some errors initially, as the configuration is incomplete. To resolve these errors, you can update the configuration step by step, like the *PATH* of external header files, global include paths, compilation flags, filtering of file extensions, exclusion of some files and directories, and pre-compiled headers and flags. The indexing wizard appears on editing the project configuration (Figure 2).

You can navigate to any symbol under a particular section, which has a nice visualisation with suitable dependencies on the left side pane and concerned code on the right side. You can click on any cross-reference symbol, which will navigate to the concerned header/source file.

Figure 4 gives an example of a single class visualisation, with public and private members.

Figure 5 gives an example of visualising class relationships (inheritance in this case). For a better view, choose to show derived hierarchy/ icons on the left side.

You can also view non-indexed symbols that are beyond the current scope of the code. At any point we can navigate between views using *Back* and *Forward* icons, list all past views with the *History* icon, and go back to the overview with the *Home* icon. You can use the *Refresh* icon when some files are updated externally and Sourcetrail cannot detect the changes; in this case,