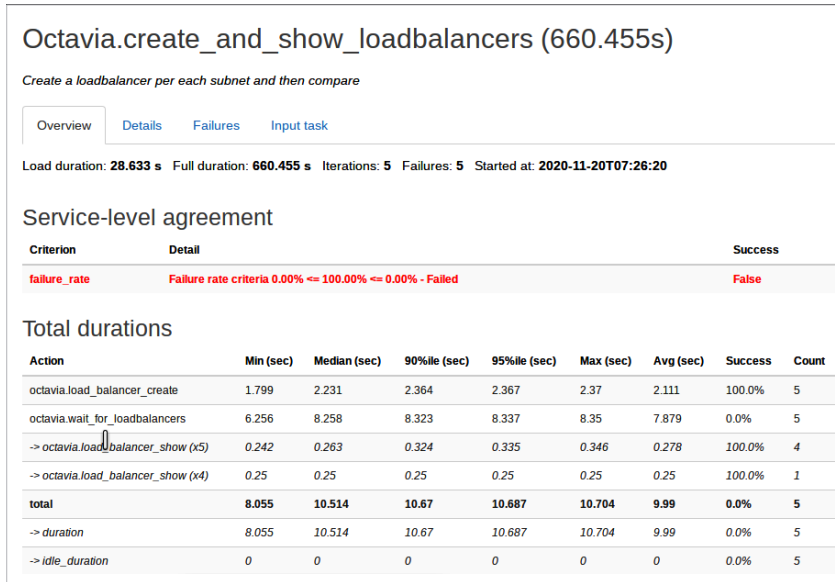
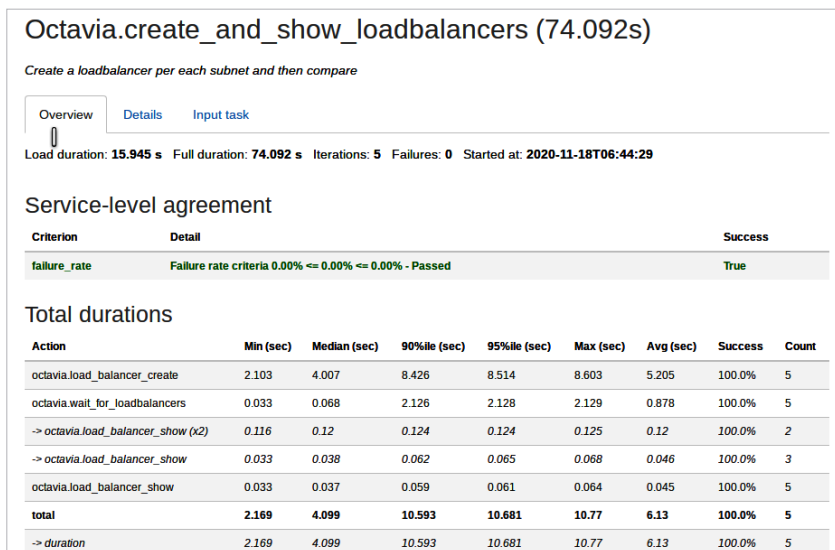


Figure 5: Result of *Octavia.create\_and\_show\_loadbalancers* task using AmphoraFigure 6: Result of *Octavia.create\_and\_show\_loadbalancers* task using OVN

DevStack uses the *local.conf* file to install OpenStack and any other required plugins. The *local.conf* file varies depending on the provider used to create Octavia load balancers. The *local.conf* file used for default installation of Octavia with DevStack can be found at <https://docs.openstack.org/devstack/latest/guides/devstack-with-lbaas-v2.html>, and the contents of the *local.conf* file for installing Octavia with OVN can be found at <https://docs.openstack.org/ovn-octavia-provider/>

*latest/admin/driver.html*. The *local.conf* file should be created in the *devstack* directory.

Each service mentioned in the *local.conf* file is preceded with *devstack@* when used as a *systemd* daemon. For example, the *o-api* service is identified by *systemd* (default system, PID1) as *devstack@o-api.service*.

Now install OpenStack with Octavia by running the following command:

```
./stack.sh
```

In case the installation is not successful, run the following command before solving the errors and reinstalling:

```
./unstack.sh && ./clean.sh
```

**Rally installation:** The method that we used was our own method, which was simpler, new and error-free. It took the least amount of time and number of steps. Also, we prefer precompiled packages from the operating system's repositories over source code, since we can remove or purge the tool without any issues or standalone installer. We can also update the tools without manually checking for a revision and avoid conflicts with the packages in the repositories. The following commands should be run to install Rally. Select 'No' when Rally asks to create a database.

```
sudo apt install rally
pip3 install rally-openstack
```

**Configuration:** To configure, first create a Rally database, as follows:

```
rally db recreate
```

Now, create a Rally deployment:

```
./devstack/openrc admin admin
rally deployment create --fromenv
--name=existing
```

The first command exports the required environment variables like *OS\_USERNAME*, *OS\_PASSWORD*, *OS\_AUTH\_URL*, etc, which are used by Rally and OpenStack services in general to communicate with change to 'the latter.'

## Testing procedure

The command to run a Rally task, the configuration of which is defined in a JSON file, say *task.json*, is:

```
rally task start task.json
```