

Proto	Recv-Q	Send-Q	local Address	Foreign Address	State	ID/Program name
tcp	0	0	127.0.0.1:6379	0.0.0.0:*	LISTEN	3692/redis-server 1
tcp	0	0	0.0.0.0:9391	0.0.0.0:*	LISTEN	13806/openvassd: Wa
tcp	0	0	0.0.0.0:1337	0.0.0.0:*	LISTEN	3656/sshd
tcp6	0	0	:::9390	:::*	LISTEN	13804/openvasmd
tcp6	0	0	:::443	:::*	LISTEN	28020/gsad

Table 1: Output of netstat

```
root@kali:~# apt-get install openvas
```

```
root@kali:~# openvas-setup
/var/lib/openvas/private/CA created
/var/lib/openvas/CA created
```

[i] This script synchronises an NVT collection with the 'OpenVAS NVT Feed'.

[i] Online information about this feed is at <http://www.openvas.org/openvas-nvt-feed>.

```
...
sent 1052 bytes received 64342138 bytes 99231.26 bytes/sec
total size is 64342138 speedup is 1.00
[i] Initializing scap database
[i] Updating CPEs
[i] Updating /var/lib/openvas/scap-data/nvdcve-2.0-2002.xml
[i] Updating /var/lib/openvas/scap-data/nvdcve-2.0-2003.xml
...
Write out database with 1 new entries
Data Base Updated
Restarting Greenbone Security Assistant: gsad.
User created with password '* password that looks like uuid *'.
```

Allowing OpenVAS through the system firewall

By default, OpenVAS runs on Port 443, so you will need to allow this port through the UFW firewall, by using the following command:

```
sudo ufw allow https
```

Accessing the OpenVAS Web interface

The OpenVAS Web interface (gsad) runs on TCP Port 9392. However, depending on your installation, it could also be listening on TCP 443. After installation, this can be confirmed by checking the listening ports on your system using the following commands (see Table 1):

```
root@localhost:~# netstat -alnp | grep LISTEN
```

From the ports shown in Table 1, we can see in our installation that *gsad* is running on Port 443. The OpenVAS Scanner (*openvassd*) is running on TCP Port 9391 and the OpenVAS Manager (*openvasmd*) is running on TCP Port

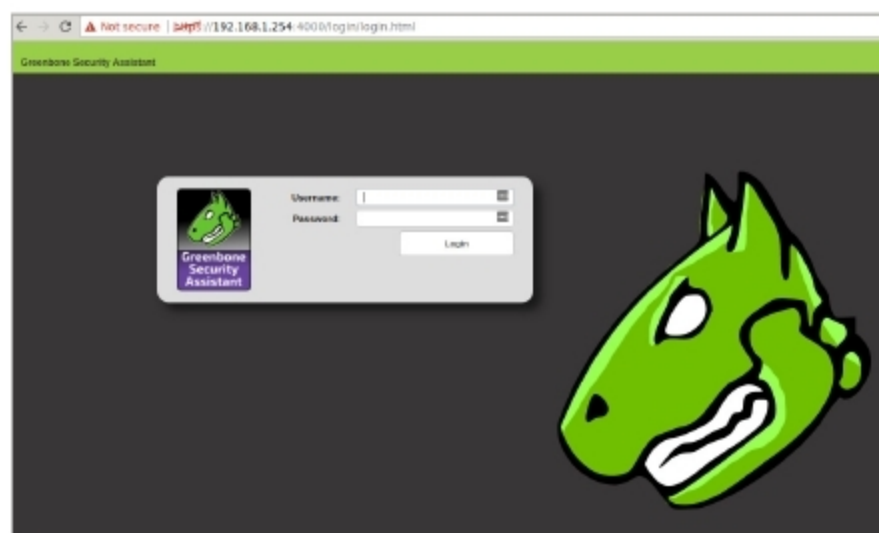


Figure 1: OpenVAS login

9390. Last is the redis-server on TCP 6379. This database is used to store temporary metadata during active scanning.

Opening <https://server-ip/> in a browser shows the login screen for the Greenbone security assistant.

Key file locations of an OpenVAS install

It is important to know the locations of your OpenVAS log files and configurations. This will allow for quicker troubleshooting and management of your server.

The prefix of the path will usually depend on how OpenVAS was installed. A default source installation will put all the files under */usr/local/* while most packages will put the files in the expected locations: */etc/openvas/*, */var/lib/openvas* and */var/log/openvas/*.

OpenVAS log files

The most common location will be */usr/local/var/log/openvas/* or */var/log/openvas/*. In here, you will find the key log files, where you should look if things are not behaving as expected.

```
root@localhost:~# ls /usr/local/var/log/openvas/
gsad.log
openvasmd.log
openvassd.dump
openvassd.messages END
```

By: Neetesh Mehrotra

The author works at NIIT Technologies as a senior test engineer, and his areas of interest are Java development and automation testing. You can contact him at mehrotra.neetesh@gmail.com.