

graphically represents the clusters of numeric data through quartiles. For example:

```
> weight <- c( 10,30,28,35,38,40,45,50)
// First vector of weight
> Group <-c ("Play Group","First Grade","First Grade","Second
Grade", "Second Grade","higher Grade","higher Grade","higher
Grade") // Second vector of different groups
> df <-data.frame(Weight=weight, Group= Group) //
Data frame is created based on two
// vectors
> qplot(Group,weight,data=df,geom=c("boxplot"))
```

Figure 4 depicts the boxplot of the above scenario. The dotplot and violin plots are created by changing the

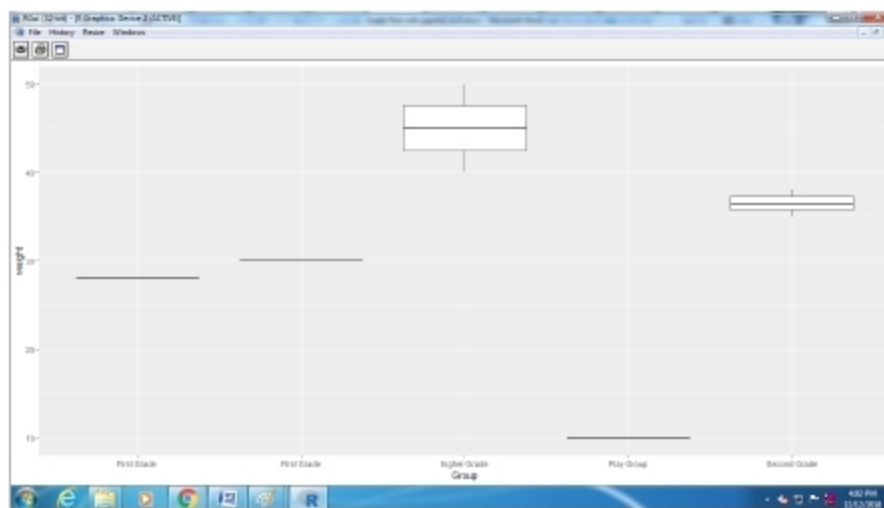


Figure 4: Boxplot using *qplot*

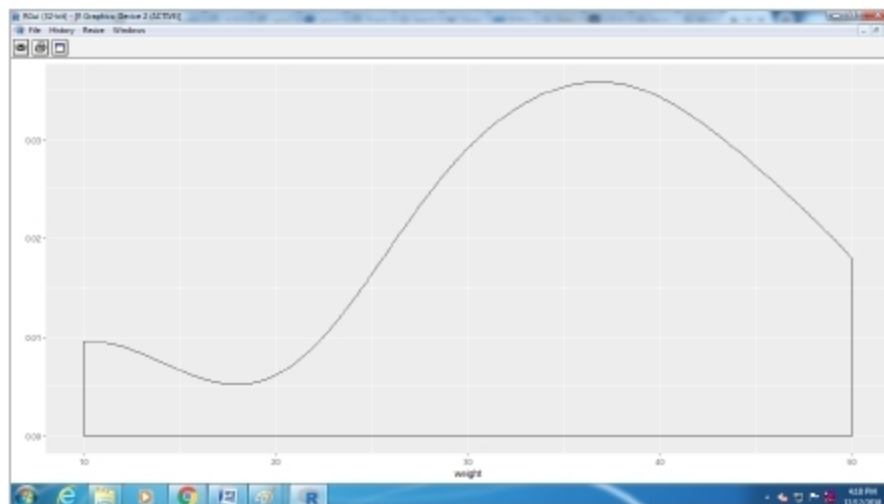


Figure 5: The density plot using *qplot*

geom parameter in the above situation as dotplot and violin, respectively:

```
>qplot(Group,weight,data=df,geom=c("dotplot"))
> qplot(Group,weight,data=df,geom=c("violin"))
```

Density plot is another important chart that depicts the distribution of data over a time period in a visual manner. It can be considered as a variation of the histogram:

```
>qplot(weight, data =df,geom = "density")
```

Figure 5 depicts the density plot using the *qplot()* function.

The *qplot()* function has an excellent capability to generate different categories of graphs with simple code. However, *qplot()* is not a generic function, which means that it cannot work for all kinds of R objects.

R software consists of the *ggplot2* package that produces elegant graphics. There are two main approaches for creating plots in *ggplot2* — by using *ggplot()* or by using *qplot()*. In this article, the second approach for creating plots was discussed with syntax, useful options and examples of various categories of plots. The *qplot()* function surpasses other functions for all simple plots but is not a generic function; so it is applicable for only limited R objects. **END** 🐧

References

- [1] <https://www.statmethods.net/advgraphs/ggplot2.html>
- [2] <http://www.sthda.com/english/wiki/qplot-quick-plot-with-ggplot2-r-software-and-data-visualization>
- [3] <https://ggplot2.tidyverse.org/reference/>
- [4] <http://www.sthda.com/english/wiki/be-awesome-in-ggplot2-a-practical-guide-to-be-highly-effective-r-software-and-data-visualization>

By: Dharmendra Patel and Dr. Atul Patel

The authors are associated with Smt. Chandaben Mohanbhai Patel Institute of Computer Applications, Gujarat. They can be reached at dharmendrapatel.mca@charusat.ac.in and atulpatel.mca@charusat.ac.in

THE COMPLETE MAGAZINE ON OPEN SOURCE

OpenSource

ForYou

The latest from the Open Source world is here.

OpenSourceForU.com

Join the community at facebook.com/opensourceforu

Follow us on Twitter @OpenSourceForU