

node) mount point for testing purposes. We assume that this master node is always running in the test environment. Alternatively, the NFS mount point can be created using any of the storage networks or in the cloud.

Note: By doing so we can ensure the isolation of environments.

Tearing down test environments

Once the testing is done and we do not require any of the configurations, this complete environment can be shut down or brought down. To do this, we need to bring down all the services, instances and containers. This can be achieved through a step-by-step approach or through a single command. Execute the command shown below to tear down all the instances simultaneously:

```
# sudo docker stack rm stackjmeter
```

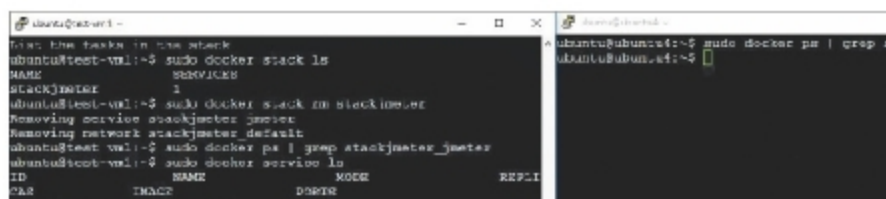


Figure 9: Tearing down of the test instance

The `stack rm` command brings down all services, removing them completely. However, if we need to have any references, all the logs and test results are stored on the NFS mount points, which enable us to do subsequent tests faster.

Continued from Page...62



Figure 7: Configuring the widget of an application

Now you can create either the team or the product dashboard. If you want to create the team dashboard, you can use widgets or some predefined templates.

Once you create a dashboard, you can configure it from the home screen. You can add whatever it is about your product that you want to track, as shown in Figure 6.

Next, you have to select your specific application and configure the widgets, as shown in Figure 7.

This article is a quick reference for achieving CI/CD context and a faster time to market in dynamically changing test environments. In addition, it offers a method for having test logs/results that are as persistent as possible, across environments. These steps help in achieving a reduced test cycle time, by enabling fast and flexible test life cycles. **END** 

References

- [1] <https://docs.docker.com/engine/reference/commandline/build/#set-build-time-variables---build-arg>
- [2] <https://hub.docker.com/>
- [3] <https://www.docker.com/products/orchestration>
- [4] <https://devopedia.org/container-orchestration>
- [5] <https://docs.docker.com/compose/overview/>
- [6] <https://docs.docker.com/engine/reference/commandline/swarm/>

By: Srikanth Mohan, Ganesan Nagasamy and Shashidhar Soppin

Srikanth Mohan is a senior architect with 15+ years of experience in IT. He specialises in test automation and performance testing. He can be contacted at tmsrikanth1982@gmail.com.

Ganesan Nagasamy has 18+ years of experience in the software industry. He specialises in test automation, non-functional testing, the cloud, Docker and Agile. He is a certified Scrum product owner. You can contact him at ganesan.nagasamy@gmail.com.

Shashidhar Soppin is a senior architect with 17+ years of experience in the IT industry. He specialises in virtualisation, Docker, the cloud, AI-ML, deep learning and OpenStack. He has patents to his name and has written many papers. He can be contacted at shashi.soppin@gmail.com.

Hygieia's dashboards enable users to view CI/CD pipelines in near real-time. You can add the source code repository, chat server, build server, deployment server, cloud monitoring features and a lot more.

The dashboards also provide crucial information about the overall vitality and performance metrics of your software operations. **END** 

References

- [1] http://hygieia.github.io/Hygieia/getting_started.html
- [2] <https://xebialabs.com/technology/hygieia/>
- [3] <https://bower.io/>
- [4] <https://css-tricks.com/gulp-for-beginners/>

By: Kousik Maiti

The author has over 11 years of industry experience. His areas of interest include Linux systems administration, security and forensics. He can be reached at kousikster@gmail.com.