

[upgrade-guide/](#). Past stable releases are available at <http://mirrors.jenkins.io/war-stable/>. The LTS changelog is available at <https://jenkins.io/changelog-stable/>.

The following options are available for Jenkins LTS installation:

- Microsoft Azure
- Docker
- FreeBSD
- Gentoo
- MacOS X
- OpenBSD
- openSUSE
- Red Hat/Fedora/CentOS
- Ubuntu/Debian
- Windows
- Generic Java package (.war)

2) **Weekly:** A new release is made available every week to deliver bug fixes and features to the Jenkins community. Past stable releases are available at <http://mirrors.jenkins.io/war/>.

LTS changelog is available at <https://jenkins.io/changelog-stable/> <https://jenkins.io/changelog/>.

The following options are available for installing the Jenkins weekly release:

- Arch Linux
- Docker
- FreeBSD
- Gentoo
- MacOS X
- OpenBSD
- openSUSE
- Red Hat/Fedora/CentOS
- Ubuntu/Debian
- OpenIndiana Hipster
- Windows
- Generic Java package (.war)

Master-agent architecture

Jenkins supports distributed architecture. Let's understand how this is useful and how it can be achieved. In the case of large and heavier projects where multiple components are involved, the master node can run out of resources such as CPU and memory while scheduling jobs at regular intervals. It is also important to note that different components need different tools and environments. Different environments may include the following:



Figure 1: Jenkins' capabilities

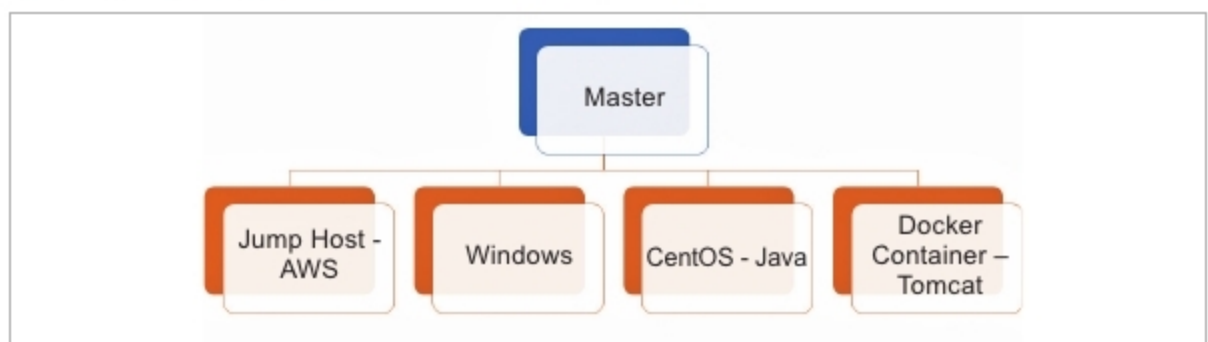


Figure 2: Master-agent architecture

Jenkins									
Nodes									
	Name	Architecture	Clock Difference	Free Disk Space	Free Swap Space	Free Temp Space	Response Time	% Disk Usage	
	master	Windows 10 (amd64)	In sync	210.84 GB	2.48 GB	88.85 GB	0ms	30.0 %	
	Data obtained	40 min	40 min	40 min	40 min	40 min	40 min	40 min	

Figure 3: Manage nodes

Jenkins	
Nodes	
Back to Dashboard Manage Jenkins New Node Configure	Node name: AgentNode * Permanent Agent: Adds a plain, permanent agent to Jenkins. This is called 'permanent' because Jenkins doesn't provide higher level of integration with these agents, such as dynamic provisioning. Select this type if no other agent types apply — for example such as when you are adding a physical computer, virtual machines managed outside Jenkins, etc.
Build Queue No builds in the queue.	OK
Build Executor Status 1 Idle 2 Idle	

Figure 4: New node