

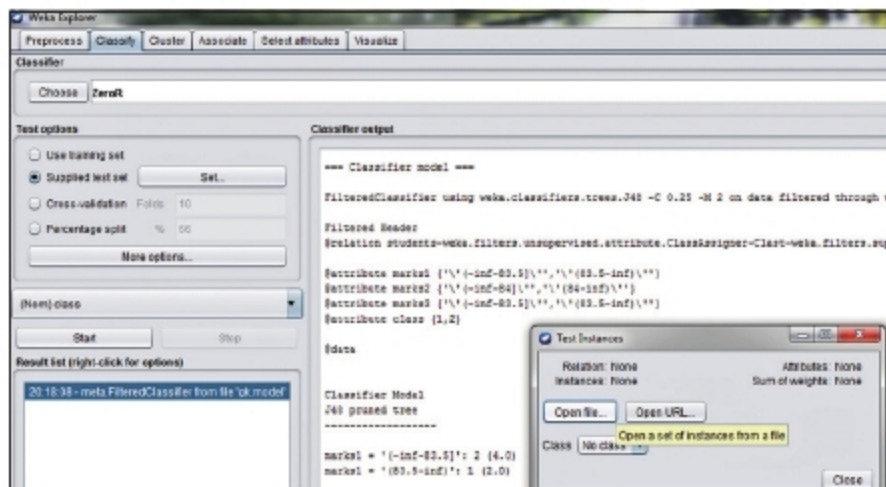


Figure 9: Selecting the test data after loading the model

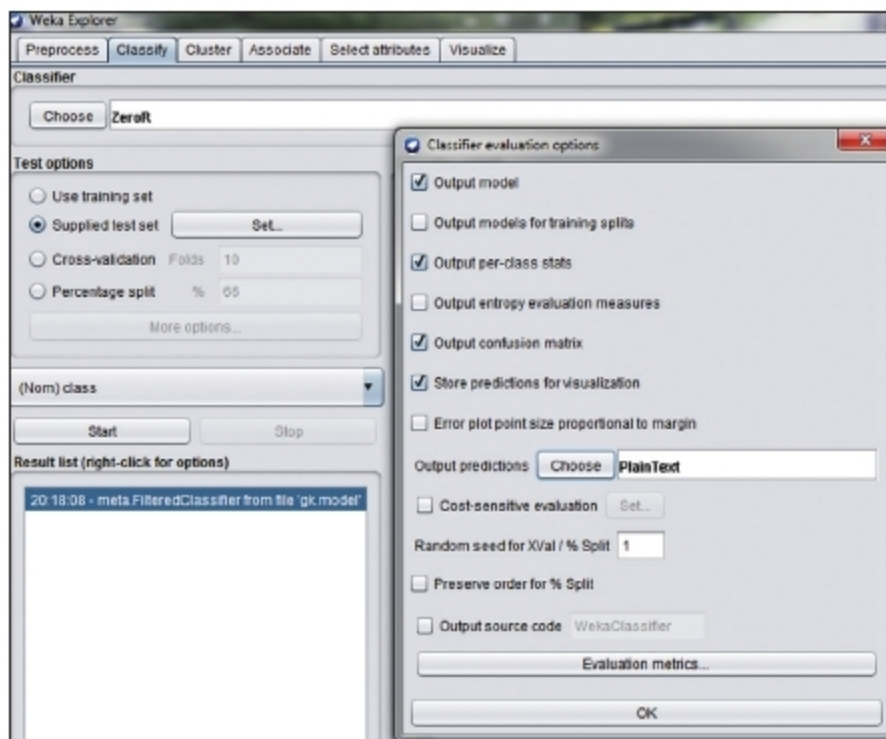


Figure 10: Enabling the plaintext option for the prediction of a class

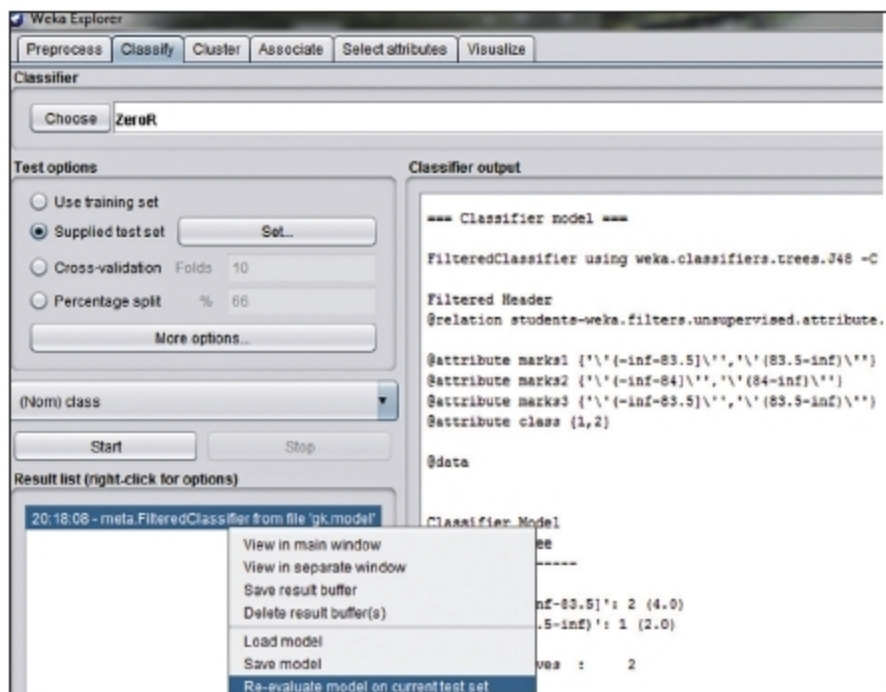


Figure 11: Executing the classification model on the test or validation data

attributes are marks1, marks2 and marks3. The determined attribute or target is the class that has an association with the determining attributes or dependent attributes in the training data set.

The classification algorithm for machine learning is executed and then has to be saved so that the prediction on

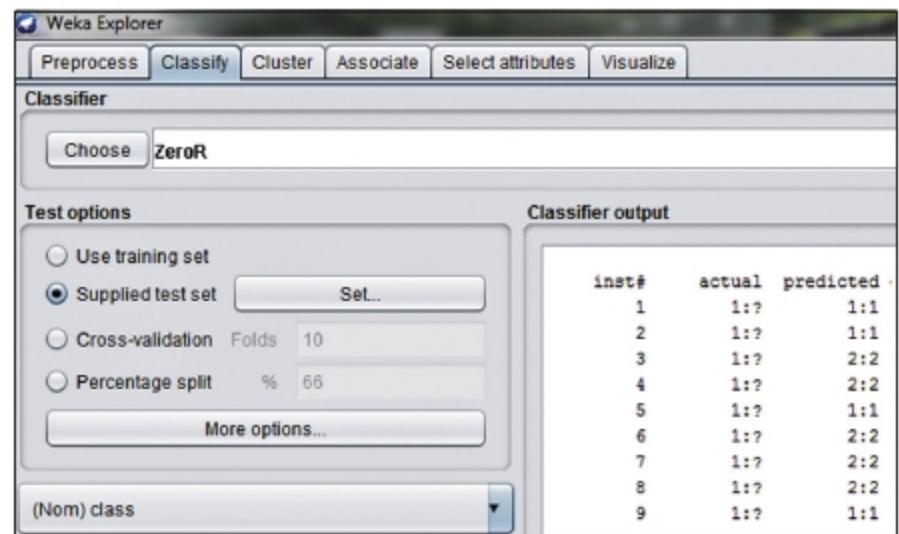
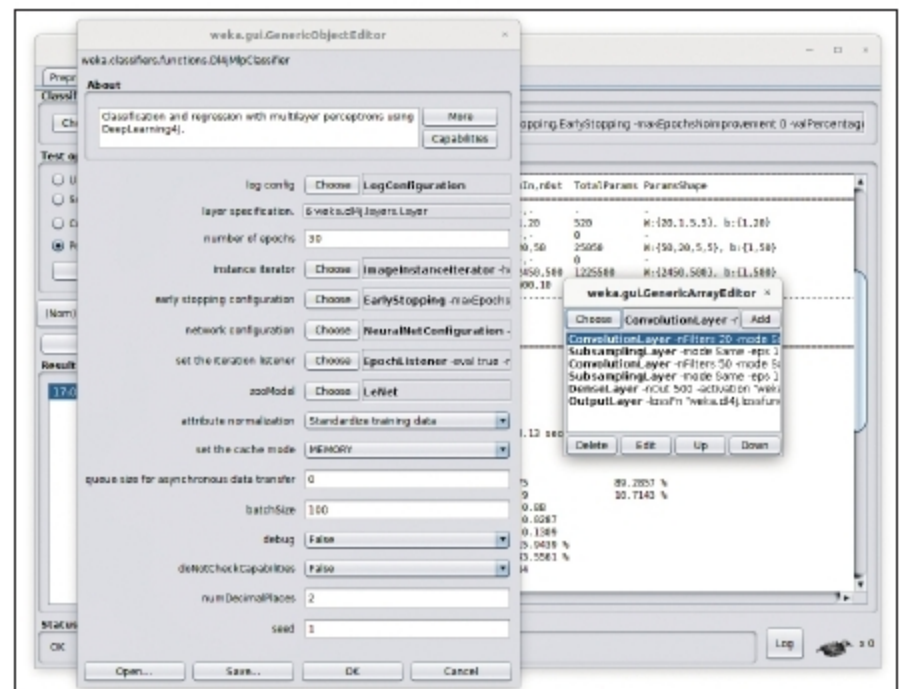


Figure 12: Analysis of the predicted classes

Figure 13: Object editor in Weka Deeplearning4j
(Source: <https://deeplearning.cms.waikato.ac.nz/>)

the testing or validation data set can be done. This means that the trained model has the association functions and the mathematical modelling of all the attributes. These mathematical modelling functions are further required for the prediction of test data that does not have the classes. The predicted class of the testing or validation data is determined on the functions created by the trained classification model as per the algorithm executed.

For the prediction of the training data set, the test data set is matched with the saved model. The saved classification model is loaded in the Weka panel and then the option of 'Supplied test set' is used for testing data. The testing data set is called using the 'Set' option so that it can be predicted with the saved classification model.

After loading the saved classification model of machine learning, the test (validation) data set is read so that the unknown classes (represented as '?') in the testing data can be predicted.

To view the predicted classes, the option of Output Predictions' in the 'Classifier Evaluation Options' is set to 'PlainText' so that the unknown classes can be viewed on the Weka interface.

Continued on page 57...