

Figure 1: Gatling folder structure

Simulation")

```

    .exec(http("request_1")
      .get(restEndPoint))
    setUp(restEndPointScenario.inject(rampUsers(1000)
over (10 seconds))).protocols(httpProtocol)
}

```

Now, we will look at how to add the dynamic data used as part of the simulation. For this, I am using Gatling's CSV feeder. You can get more information on Gatling's feeders from <http://gatling.io/docs/2.2.3/session/feeder.html>. Add the feeder file to the `src/test/resources/data` folder. The sample simulation using the CSV feeder is given below:

```

package org.smarttechie

import io.gatling.core.Predef._
import io.gatling.http.Predef._
import scala.concurrent.duration._
import com.typesafe.config._

class SampleFeederRESTEndPointPrefSimulation extends
Simulation {
  val conf = ConfigFactory.load()
  val postsFeed = csv("posts.csv").circular //CSV
  Feeder

  val baseUrl = conf.getString("baseUrl")
  val httpProtocol = http.baseUrl(baseUrl) //
  sample comment
    val restEndPoint = "/posts/${post_id}" // The
    value of the post_id filed from the feed will go here.

    val restEndPointScenario = scenario("Posts_Pref_
Feeder_Simulation")
      .feed(postsFeed) //pass the feed for
      scenario
        .exec(http("request_1")
          .get(restEndPoint))
  setUp(restEndPointScenario.inject(rampUsers(1000) over (10
seconds))).protocols(httpProtocol)
}

```

The entire project used to demonstrate Gatling usage is

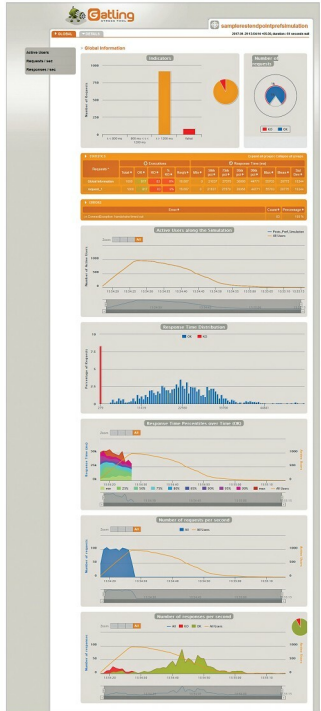


Figure 2: Gatling performance stats

available on https://github.com/2013techsmarts/Gatling_Maven_Demo.

By: Siva Prasad Rao Janapati

The author is a software engineer working in the e-commerce domain. He has hands-on experience in Java, JEE, Spring, Oracle Commerce and other open source/enterprise technologies. He blogs at <http://smarttechie.org>.