

Figure 1: The OpenShift portal

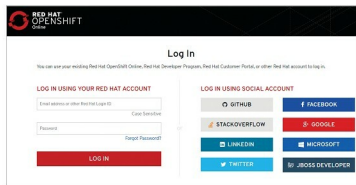


Figure 2: Login panel for Red Hat OpenShift

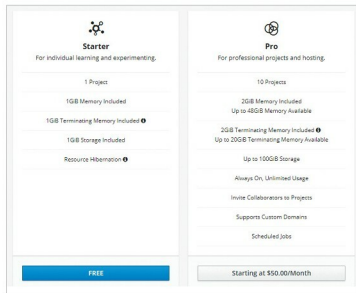


Figure 3: Starter and pro plans for cloud users on OpenShift

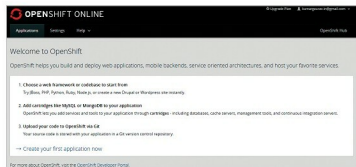


Figure 4: Dashboard of OpenShift to create new applications

The cloud applications can be uploaded using mapping with GIT via a local command prompt (Windows CMD or Linux Terminal). OpenShift specifies

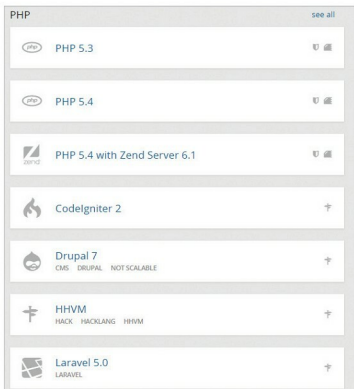


Figure 5: Selecting the programming language on OpenShift

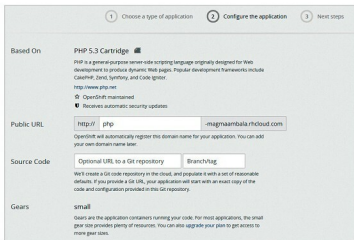


Figure 6: Assigning the URL to the PHP application on OpenShift

the commands that should be executed on the local command prompt or in the Linux Shell.

Developing a Twitter extraction using PHP on the OpenShift PaaS

To develop a Twitter extraction on the OpenShift PaaS, use the code given below:

```
<?php
error_reporting(0);
require_once('TwitterAPIExchange.php');
$settings = array(
    'oauth_access_token' => 'xxxxxxxxxxxxxxxxxxxxxxxxxxxx',
    'oauth_access_token_secret' => 'xxxxxxxxxxxxxxxxxxxxxxxxxxxx',
    'consumer_key' => 'xxxxxxxxxxxxxxxxxxxxxxxxxxxx',
```