

Figure 7: Selecting the region the cloud application should be deployed in



Figure 8: Mapping of the command prompt with GIT to upload the code on the live cloud

```
'consumer_secret' => "XXXXXXXXXXXXXXXXXXXXXXXXXXXX"
);
$twitterurl = "https://api.twitter.com/1.1/statuses/user_
timeline.json";
$requestMethod = "GET";
if (isset($_GET['user'])) {$user = $_GET['user'];} else
{$user = "gauravkumarin";}
if (isset($_GET['count'])) {$count = $_GET['count'];} else
{$count = 20;}
$field = "?screen_name=$user&count=$count";
$mytwitter = new TwitterAPIExchange($settings);
$str = json_decode($mytwitter->setGetfield($field)
->buildOAuth($twitterurl, $requestMethod)
->performRequest(), true);
if ($str["errors"][0]["message"] != "") {echo "<h3>Sorry,
there was a problem.</h3><p>Twitter returned the following
error message:</p><p><em>".$str["errors"][0]["message"]."</
em></p>";exit();}
foreach($str as $current)
{
    echo "Time and Date of Tweet: ".$current['created_
at']."<br />";
    echo "Tweet: ". $current['text']."<br />";
    echo "Tweeted by: ". $current['user']['name']."<br
/>";
    echo "Screen name: ". $current['user']['screen_
name']."<br />";
    echo "Followers: ". $current['user']['followers_
?>
```



Figure 9: Copying local files to the OpenShift cloud

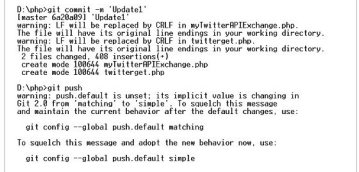


Figure 10: Committing the changes as a permanent write operation on the cloud

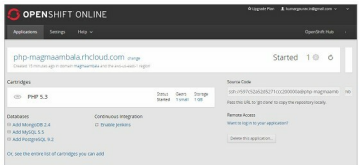


Figure 11: View the configuration and URL of the cloud app



Figure 12: Executing the Twitter timeline extraction on the OpenShift cloud

```
count', "<br />";
    echo "Friends: ". $current['user']['friends_
count', "<br />";
    echo "Listed: ". $current['user']['listed_
count', "<br />";
    }
    ?>
```