

```

service/checkoutservice created
deployment.apps/recommendationservice created
service/recommendationservice created
deployment.apps/frontend created
service/frontend created
service/frontend-external created
deployment.apps/paymentservice created
service/paymentservice created
deployment.apps/productcatalogservice created
service/productcatalogservice created
deployment.apps/cartservice created
service/cartservice created
deployment.apps/loadgenerator created
deployment.apps/currencyservice created
service/currencyservice created
deployment.apps/shippingservice created

```

```

service/shippingservice created
deployment.apps/redis-cart created
service/redis-cart created
deployment.apps/adservice created
service/adservice created

```

The installation of the app will start now, but it will take some time to reflect that we have used kubectl commands.

```

kubectl get pods

```

NAME	READY	STATUS	RESTARTS	AGE
adservice-775d8b9bf5-cp7jr	0/1	Pending	0	8h
cartservice-79749895f5-jrq4d	1/1	Running	0	8h
checkoutservice-5645bf9c65-882m4	1/1	Running	0	8h
currencyservice-545c79d477-8rhg7	1/1	Running	0	8h
emailservice-7cc5c74b4f-hk74s	1/1	Running	0	8h

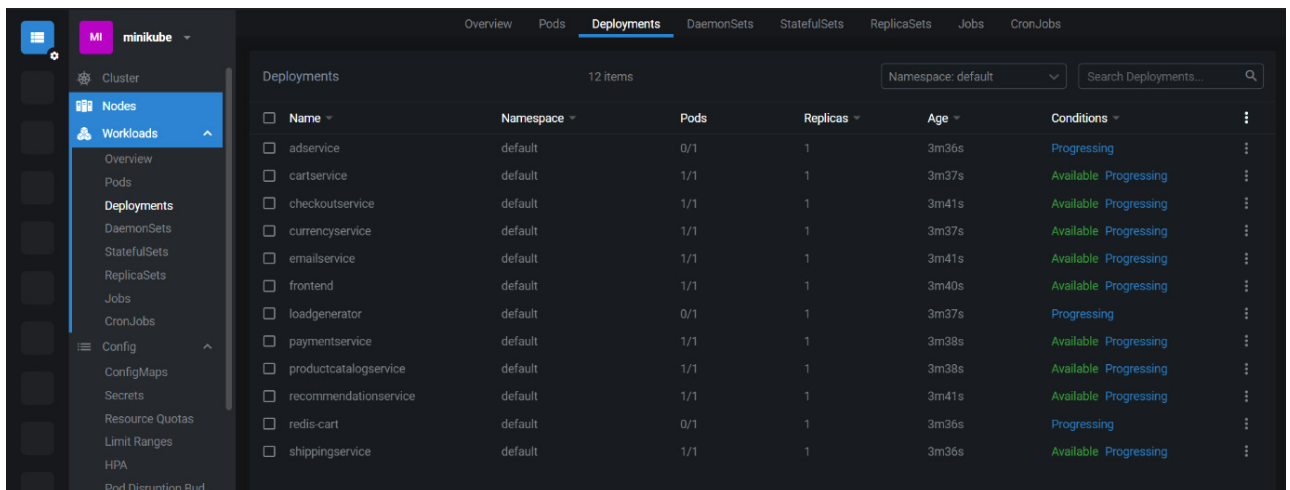


Figure 7: Lens deployments

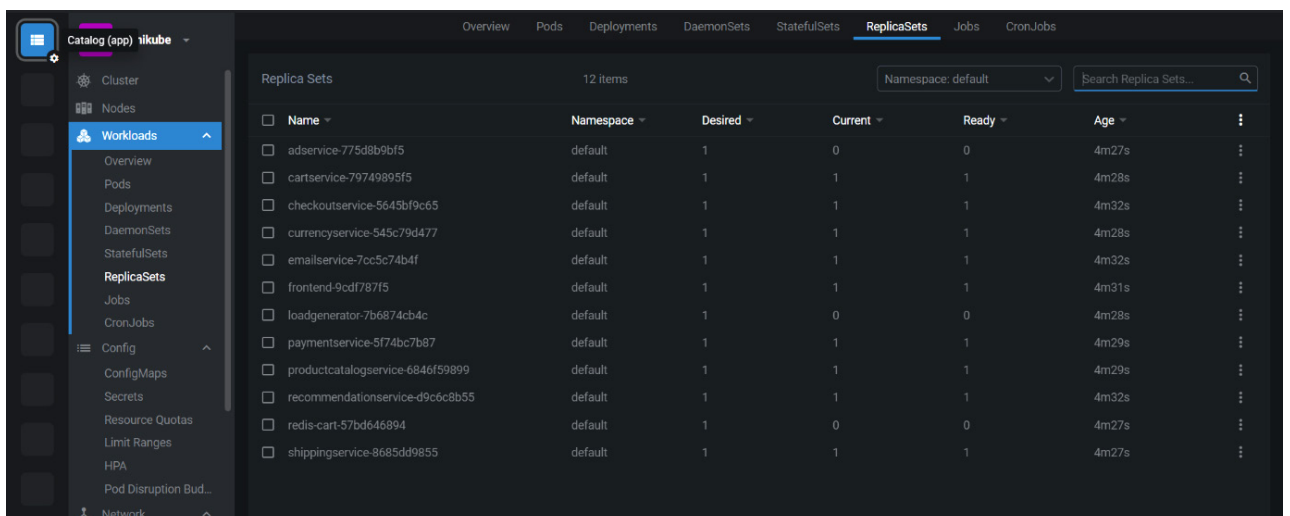


Figure 8: Lens Replicasets