

Table 1

Description	Command
List one or more nodes	<code>kubectl get node</code>
List all resources in the cluster	<code>kubectl get all --all-namespaces</code>
List one or more deployments	<code>kubectl get deployment</code>
Display the complete state of one or more deployments	<code>kubectl describe deployment <deployment_name></code>
Edit and update one or more deployments on the cluster	<code>kubectl edit deployment <deployment_name></code>
Delete deployments	<code>kubectl delete deployment <deployment_name></code>
List one or more pods	<code>kubectl get pod</code>
Delete a pod	<code>kubectl delete pod <pod_name></code>
Display the complete state of a pod	<code>kubectl describe pod <pod_name></code>
Get a shell to a running single-container pod	<code>kubectl exec -it <pod_name> /bin/bash</code>
List secrets	<code>kubectl get secrets</code>
List one or more services	<code>kubectl get services</code>
Display the complete state of a service	<code>kubectl describe services</code>
Edit and update one or more services on the cluster	<code>kubectl edit services / kubectl edit deployment <deployment_name></code>
List one or more namespaces	<code>kubectl get namespace <namespace_name></code>
Print the logs for a pod	<code>kubectl logs <pod_name></code>
Print the logs for a specific container in a pod	<code>kubectl logs -c <container_name> <pod_name></code>

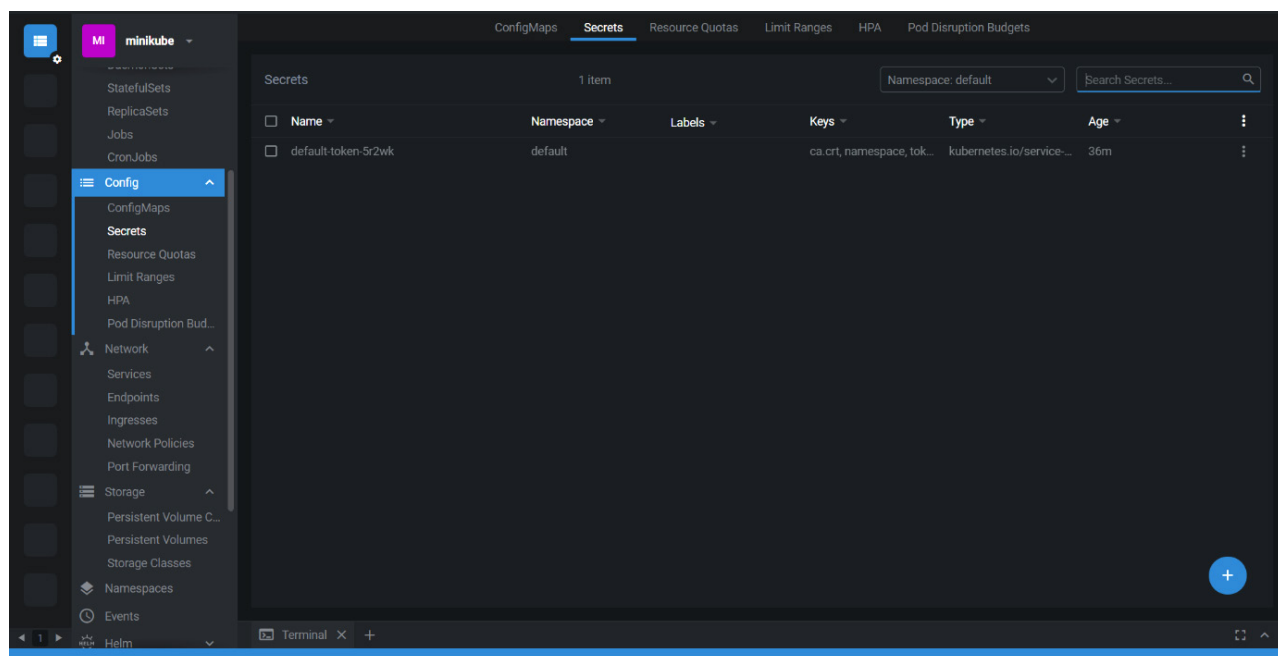


Figure 9: Lens Secrets