


Common Errors and Error Handling

In this twelfth article in the R series, we are going to learn about the common errors that are observed in R, and how to handle them.

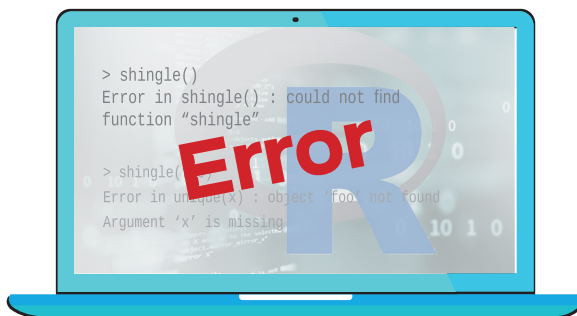

As done in the earlier parts of this series, we are going to use the R version 4.1.2 installed on Parabola GNU/Linux-libre (x86-64) for the code snippets.

```
$ R --version
R version 4.1.2 (2021-11-01) -- "Bird Hippie"
Copyright (C) 2021 The R Foundation for Statistical Computing
Platform: x86_64-pc-linux-gnu (64-bit)
```

R is free software and comes with ABSOLUTELY NO WARRANTY. You are welcome to redistribute it under the terms of the GNU General Public License versions 2 or 3. For more information about these matters see

<https://www.gnu.org/licenses/>.

'Could not find function' error

Consider the use of the *shingle()* function in an R session:

```
> shingle()
Error in shingle() : could not find function "shingle"
```

The *shingle()* function is defined in the *lattice* package, and the library needs to be first loaded before using the same in the console, as shown below:

```
> library(lattice)

> head(mtcars)
```

```
      mpg  cyl  disp  hp drat   wt  qsec vs am
gear carb
Mazda RX4    21.0   6  160 110 3.90 2.620 16.46  0  1   4   4
Mazda RX4 Wag 21.0   6  160 110 3.90 2.875 17.02  0  1   4   4
Datsun 710    22.8   4  108  93 3.85 2.320 18.61  1  1   4   1
Hornet 4 Drive 21.4   6  258 110 3.08 3.215 19.44  1  0  3   1
Hornet Sportabout 18.7  8 360 175 3.15 3.440 17.02  0  0  3   2
Valiant      18.1   6  225 105 2.76 3.460 20.22  1  0   3   1
```

```
> shingle(mtcars$cyl)
```

Data:

```
[1] 6 6 4 6 8 6 8 4 4 6 6 8 8 8 8 8 4 4 4 4 8 8 8 8 4 4 4
8 6 8 4
```

Intervals:

```
      min max count
1     4   4    11
2     6   6     7
3     8   8    14
```

Overlap between adjacent intervals:

```
[1] 0 0
```

'Object not found' error

The 'object not found' error is displayed when using an R object that does not exist:

```
> shingle(foo)
Error in unique(x) : object 'foo' not found
```

Argument 'x' is missing

An R function will have mandatory and optional arguments. If the required arguments are not provided in the function call, the 'argument is missing' error is displayed as shown below:

```
> shingle()
Error in unique(x) : argument "x" is missing, with no default
```

Spelling mistake

R is a case-sensitive programming language. Hence, we