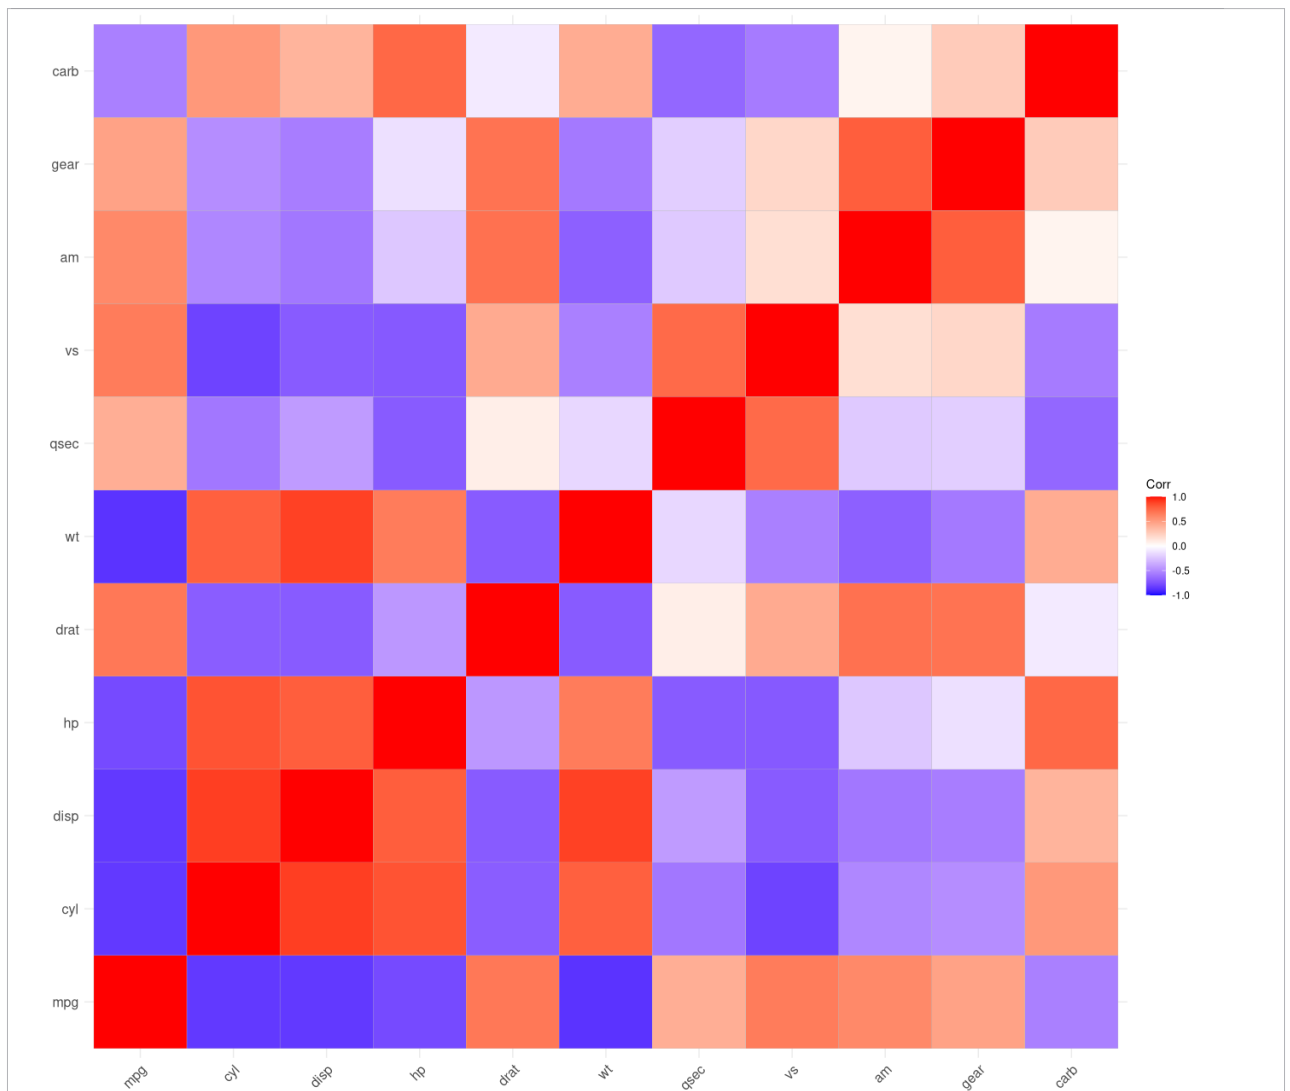


Figure 4: *ggcorrplot*

An example is given below:

```
> a <- c(1, 3, 5)
> b <- c(2, 4, NA)
```

```
> cor(a, b)
[1] NA
```

```
> cor(a, b, use = "complete.obs")
[1] 1
```

An MxN correlation matrix can be created for a data frame. For example:

```
> cor(mtcars)
```

```
      mpg      cyl      disp      hp      drat      wt
```

```
mpg  1.0000000 -0.8521620 -0.8475514 -0.7761684  0.68117191
      -0.8676594
cyl  -0.8521620  1.0000000  0.9020329  0.8324475 -0.69993811
      0.7824958
disp -0.8475514  0.9020329  1.0000000  0.7909486 -0.71021393
      0.8879799
hp   -0.7761684  0.8324475  0.7909486  1.0000000 -0.44875912
      0.6587479
drat  0.6811719 -0.6999381 -0.7102139 -0.4487591  1.00000000
      -0.7124406
wt   -0.8676594  0.7824958  0.8879799  0.6587479 -0.71244065
      1.0000000
qsec  0.4186840 -0.5912421 -0.4336979 -0.7082234  0.09120476
      -0.1747159
vs    0.6640389 -0.8108118 -0.7104159 -0.7230967  0.44027846
      -0.5549157
carb  0.5998324 -0.5226070 -0.5912270 -0.2432043  0.71271113
```