

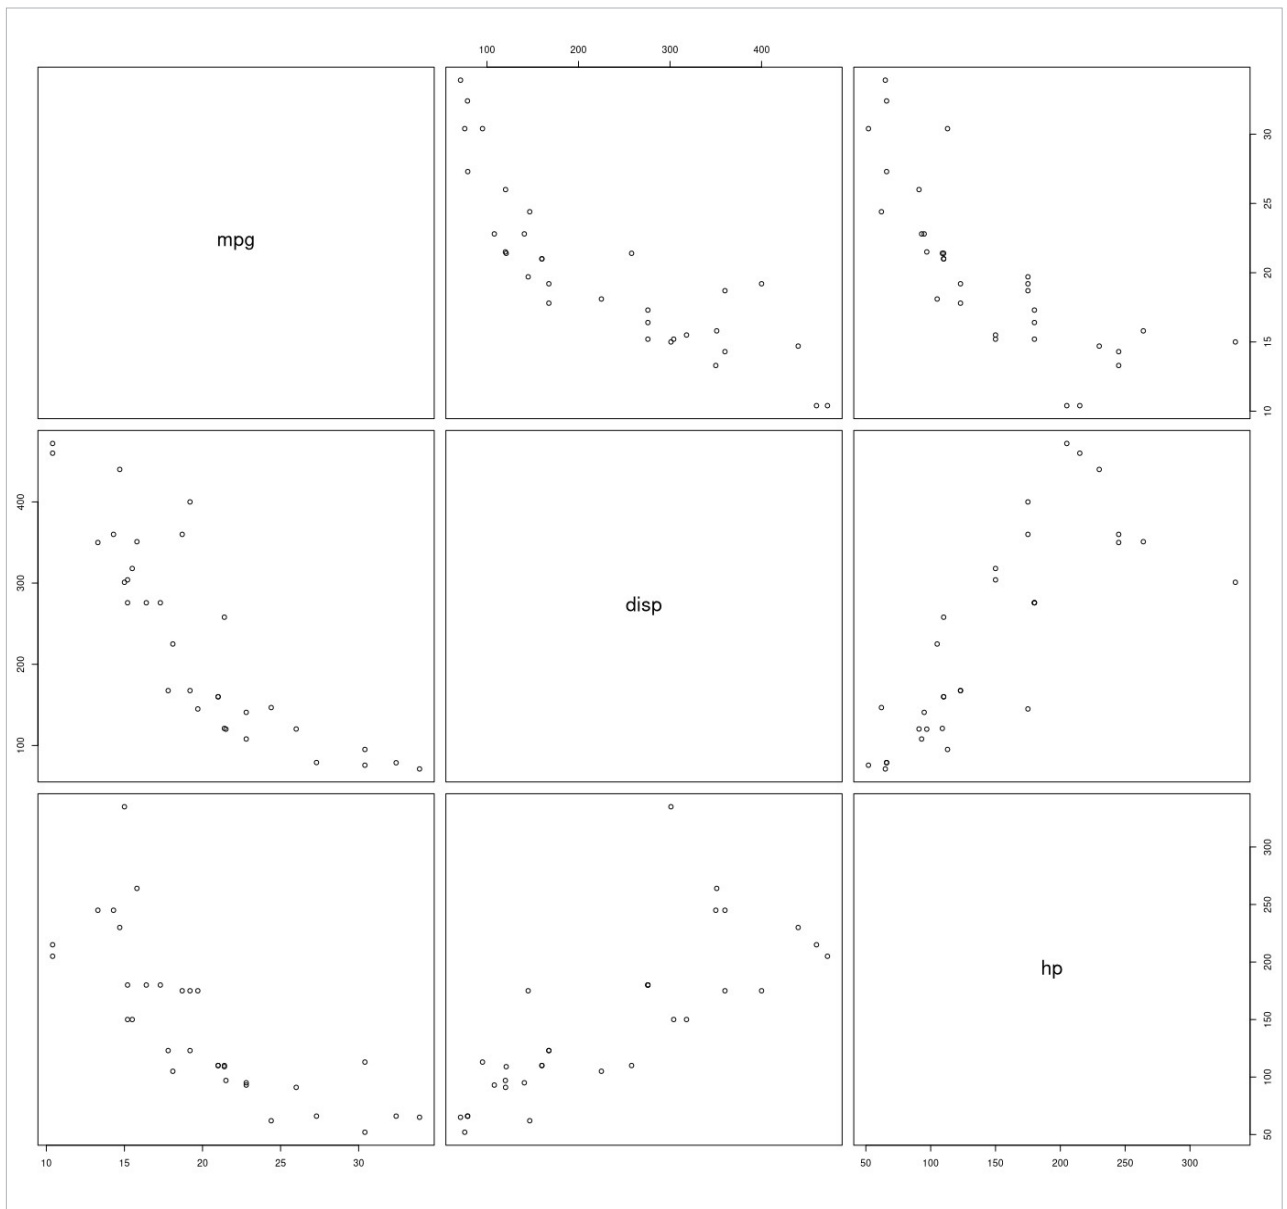


Figure 5: pairs

```
> ggcorrplot(cor(mtcars))
```

The scatterplots are also useful for visualising the matrix. The *pairs()* function is used to compare the miles per gallon, displacement and horsepower, as shown below:

```
> pairs(mtcars[, c("mpg", "disp", "hp")])
```

The *ggscatterstats()* function accepts a data frame, and produces a combined density and histogram plot. It is provided by the *ggstatsplot* library, which is an extension of the *ggplot2* package. An example is given below:

```
> install.packages("ggstatsplot")
```

```
...
```

```
** testing if installed package keeps a record of  
temporary installation path
```

```
* DONE (ggstatsplot)
```

```
> library(ggstatsplot)
```

```
> ggscatterstats(data = mtcars, x = cyl, y = hp)
```

The *ggscatterstats()* function accepts the following arguments: