


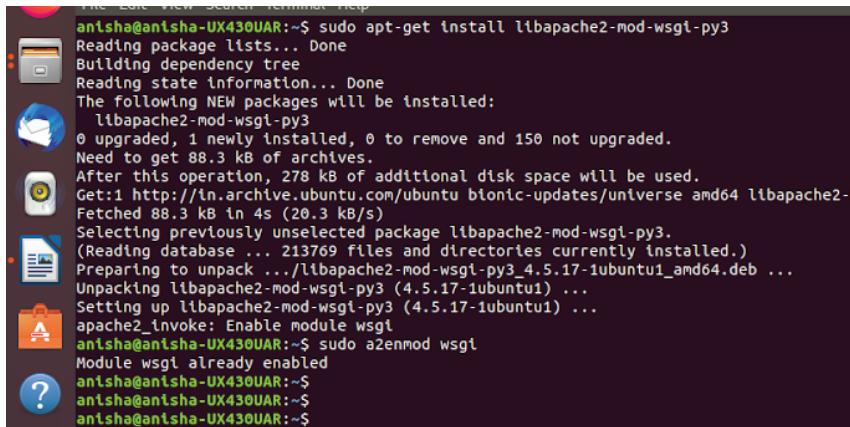

```

antisha@antisha-UX430UAR:~$ sudo apt-get install libapache2-mod-wsgi-py3
Reading package lists... Done
Building dependency tree
Reading state information... Done
The following NEW packages will be installed:
  libapache2-mod-wsgi-py3
0 upgraded, 1 newly installed, 0 to remove and 150 not upgraded.
Need to get 88.3 kB of archives.
After this operation, 278 kB of additional disk space will be used.
Get:1 http://in.archive.ubuntu.com/ubuntu bionic-updates/universe amd64 libapache2-
  mod-wsgi-py3 4.5.17-1ubuntu1 amd64.deb ...
  88.3 kB in 4s (20.3 kB/s)
Selecting previously unselected package libapache2-mod-wsgi-py3.
(Reading database ... 213769 files and directories currently installed.)
Preparing to unpack .../libapache2-mod-wsgi-py3_4.5.17-1ubuntu1_amd64.deb ...
Unpacking libapache2-mod-wsgi-py3 (4.5.17-1ubuntu1) ...
Setting up libapache2-mod-wsgi-py3 (4.5.17-1ubuntu1) ...
apache2_invoke: Enable module wsgi
antisha@antisha-UX430UAR:~$ sudo a2enmod wsgi
Module wsgi already enabled
antisha@antisha-UX430UAR:~$
antisha@antisha-UX430UAR:~$
antisha@antisha-UX430UAR:~$

```

Figure 3: Installing *mod_wsgi*

library, wraps that information in high-level helpers, so encoding issues should not affect you. Werkzeug doesn't enforce any dependencies. It is up to us to choose a template engine, database adapter, and even how to handle requests.

Figure 3 shows how to install *mod_wsgi* and enable it.

Now you are good to go with setting up the Flask application! To do so we need to create a separate directory and create `__init.py` file. I will be using nano editor to make a simple 'Hello World' Flask app where we add a shebang line to specify which interpreter to use.

```

#!/usr/bin/python
from flask import Flask
app = Flask(__name__)
@app.route("/")
def hello():
    return "Hello world!"
if __name__ == "__main__":
    app.run()

```

Next, we need to create a configuration file. Make sure the name of the configuration file is the same as that of `nano/etc/apache2/sites-available/flask_Apache.conf` and write the configuration file as below. Provide your system IP address.

```

<VirtualHost *:80>
    ServerName yourdomain.

```

```

com(yours system ipaddress)
    ServerAdmin youemail@
email.com
    WSGIScriptAlias / /var/
www/FlaskApp/flaskapp.wsgi
    <Directory /var/www/
FlaskApp/FlaskApp/>
        Order allow,deny
        Allow from all
    </Directory>
    Alias /static /var/www/
FlaskApp/FlaskApp/static
    <Directory /var/www/
FlaskApp/FlaskApp/static/>
        Order allow,deny
        Allow from all
    </Directory>
    ErrorLog ${APACHE_LOG_
DIR}/error.log
    LogLevel warn
    CustomLog ${APACHE_LOG_
DIR}/access.log combined
</VirtualHost>

```

Next, we need to create a *flaskapp.wsgi*.

```

nano flaskapp.wsgi

#!/usr/bin/python
import sys

```

```

import logging
logging.basicConfig(stream=sys.stderr)
sys.path.insert(0, "/var/www/FlaskApp/")

```

```

from FlaskApp import app as application
application.secret_key =
'fhkjdsjkjg(anything)'

```

a2ensite

a2ensite is a script that enables the specified site (which contains a `<VirtualHost>` block) within the Apache2 configuration. It does this by creating symlinks within `/etc/apache2/sites-enabled`. Likewise, a2dissite disables a site by removing those symlinks. It is not an error to enable a site which is already enabled, or to disable one which is already disabled.

The very first virtual host is treated in a special way as every request not matching the actual directive is redirected to this. It is also known as the 000-default due to the same.

Then use a2ensite to enable the Apache server.

```

sudo a2ensite /etc/apache2/sites-
available/flask_.conf
apache2 -f /etc/apache2/apache2.conf -k
stop

```

```

apache2 -f /etc/apache2/apache2.conf -k
start

```

Use the URL given below on your web browser to start your Flask application.

`http://{your IP address}/test Flask/`

You will see the 'Hello world!' message.

Congratulations, you have successfully deployed a Flask application! 

 By: Anisha Ghosh

The author is an open source enthusiast, and a contributor to the open source communities and repositories. She likes to take interest in various development based projects.