

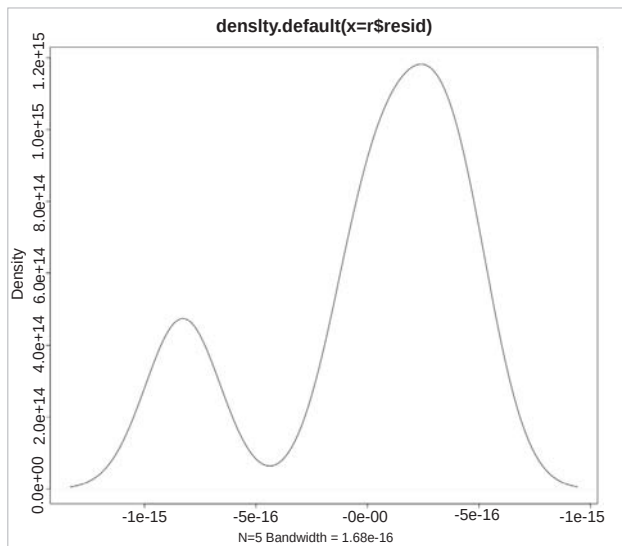


Figure 3: Density plot

The `ls()` function on the relation lists the various components of the 'r' object. For example:

```
> ls(r)
[1] "assign"    "call"      "coefficients" "df.residual"
[5] "effects"   "fitted.values" "model"        "qr"
[9] "rank"      "residuals"  "terms"        "xlevels"
```

The components are briefly described below:

Component	Description
assign	integer vector for each column
effects	named numeric vector
rank	numeric rank of the model
call	the matched call
fitted.values	the fitted mean values
residuals	response - fitted values
coefficients	named vector of coefficients
model	model frame used
terms	the 'terms' object
df.residual	residual degrees of freedom
qr	QR decomposition
xlevels	levels of the factors used in fitting

The individual components can be viewed by prepending them with the '\$' on the relation, as illustrated below:

```
> r$coefficients
(Intercept)          x
              1          1

> r$assign
[1] 0 1

> r$effects
(Intercept)          x
-1.341641e+01  6.324555e+00  0.000000e+00 -4.440892e-16
-8.881784e-16

> r$rank
[1] 2

> r$call
lm(formula = y ~ x)

> r$fitted.values
 1  2  3  4  5
 2  4  6  8 10

> r$residuals
      1          2          3          4
5
4.367205e-16 -8.275904e-16  3.027995e-16  1.302899e-16
-4.221962e-17

> r$model
  y x
1  2 1
2  4 3
3  6 5
4  8 7
5 10 9

> r$terms
y ~ x
attr(,"variables")
list(y, x)
attr(,"factors")
  x
y 0
x 1
attr(,"term.labels")
[1] "x"
attr(,"order")
[1] 1
attr(,"intercept")
```