

NAME	TYPE	CLUSTER-IP	EXTERNAL-IP
PORT(S)	AGE		
kubernetes	ClusterIP	10.96.0.1	<none>
443/TCP	12m		
petclinic	LoadBalancer	10.98.225.67	10.98.225.67
8080:30200/TCP	69s		

Visit the localhost:8080 in the browser and our sample application is ready.

Installing ZAP

OWASP ZAP can be installed on different kinds of operating systems such as Windows, macOS, and Linux. The exact steps for installation depend on the operating system.

Click on *Linux Installer* and it will download ZAP_2_12_0_unix.sh.

Change the access permission of ZAP_2_12_0_unix.sh using the *chmod* command and run it. You need to be a root user to run it (as shown in Figure 1).

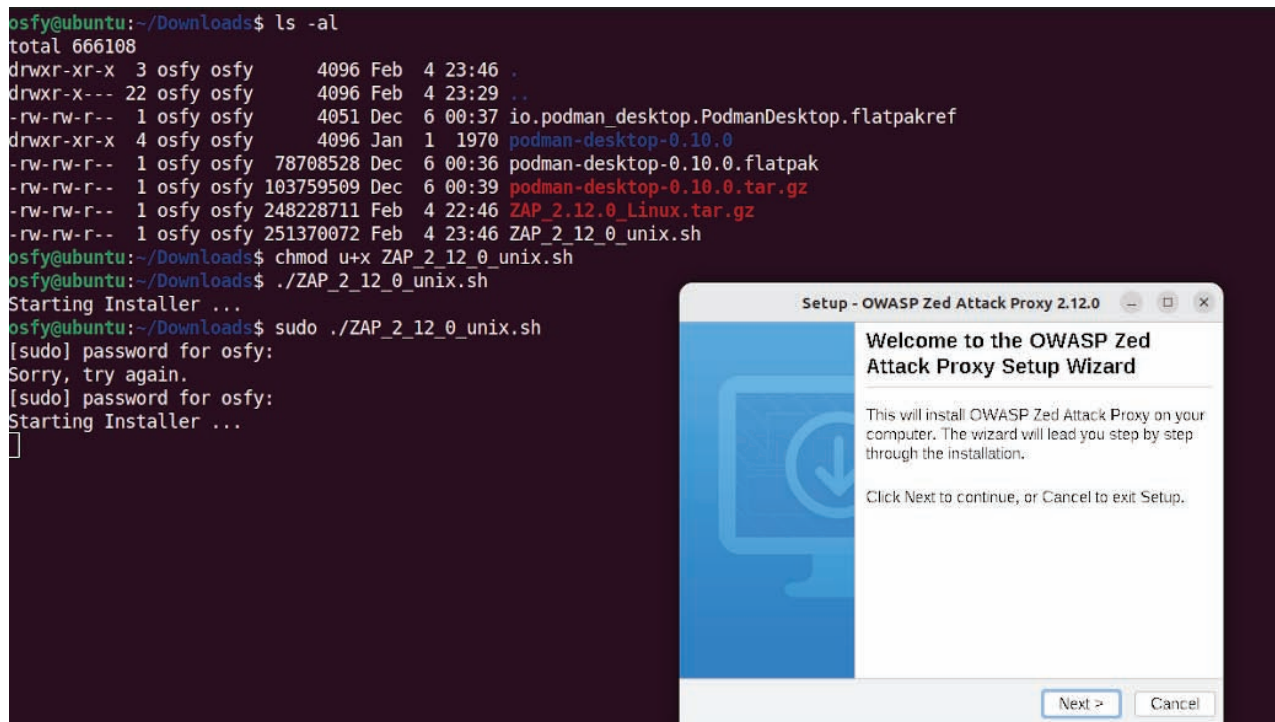


Figure 1: Installing ZAP on Linux

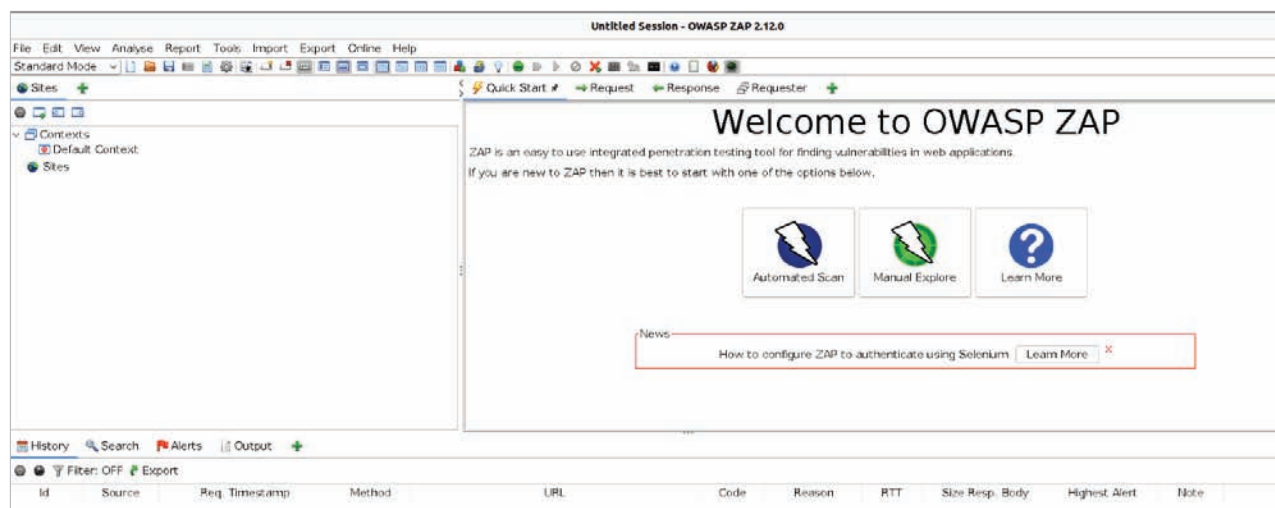


Figure 2: Application in action