

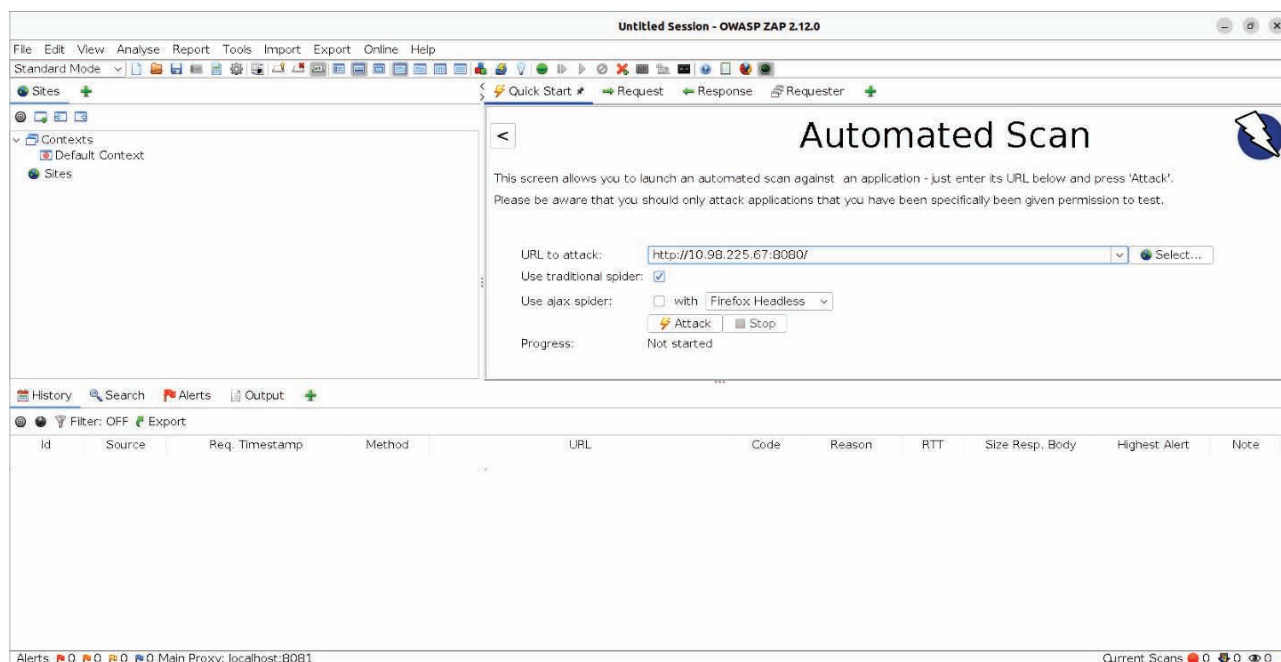


Figure 3: Starting the attack

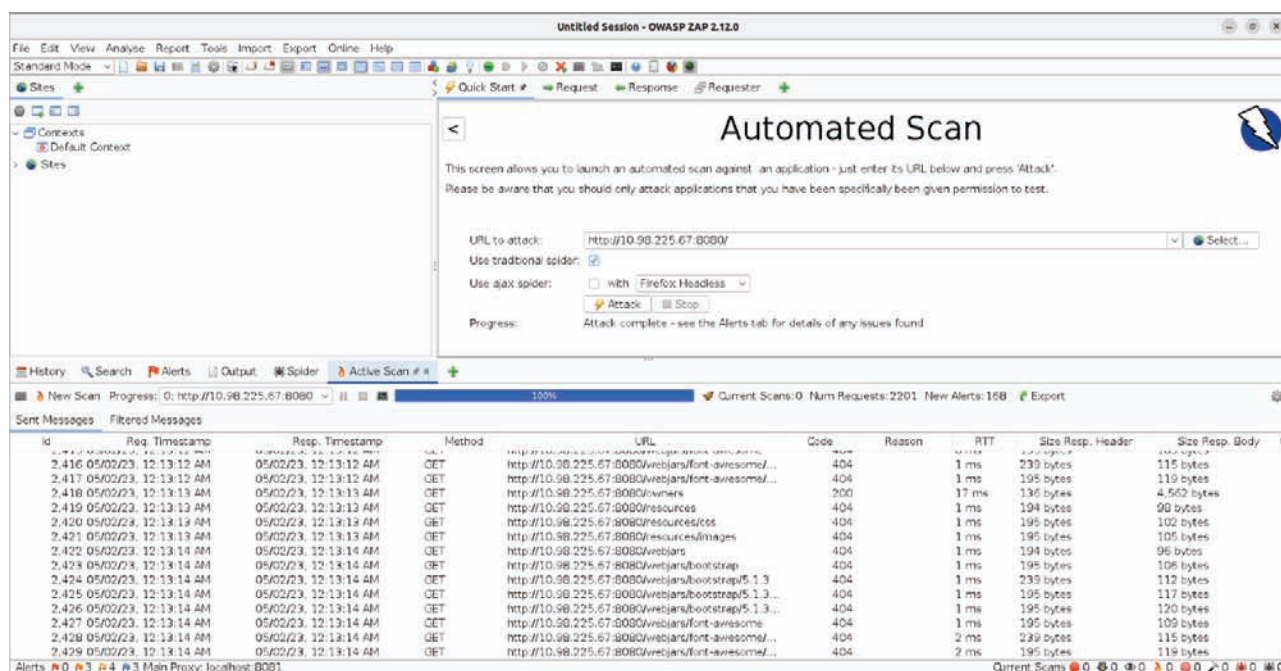


Figure 4: Generating a report

Follow the installation steps and finish the installation.
Run the application once the installation is completed and then click on 'Automated Scan', as shown in Figure 2.
Give the application URL that we have deployed in the minikube cluster and click on 'Attack', as shown in Figure 3.
Wait until 'Active Scan' is completed. Now click on

'Report Menu' and select 'Generate Report'. Select the appropriate 'Template' (Figure 4).

You can even generate the PDF of the scanning report. OWASP ZAP can also be run using Docker. In fact, Docker provides a convenient way to run OWASP ZAP in a consistent environment, regardless of the underlying operating system. END 🐧